



WOOD



Atelier

Elegance	p. 424
Prestige	p. 426
Vintage	p. 428
Heritage	p. 430
Noble	p. 432

Play

p. 436

Shade

p. 438

Pure

p. 444

Viva

p. 450

Professional

Professional 22	p. 454
Professional 14	p. 455
Professional 13	p. 456
Professional 10	p. 457



OUR SELECTION OF ACCESSORIES FOR WOOD



1

Pipe cover

Protects the bottom of pipes.
Made of solid wood.

See p. 571 for detailed info



2

Alustar transition profile

Creates perfect finishes
between 2 floorings.
Very easy to fit and match
with wood species.

See p. 571 for detailed info



3

Stair nosing

Protects the flooring
at the edge of a step.
Made of solid wood.

See p. 570 for detailed info



4

Skirting

Veneer skirting matching
various wood species,
adapted for Clipstar system.


See p. 571 for detailed info

WOOD OFFER



ATELIER

- A range built on emotions for the natural feeling of real wood.
- A prestigious collection of exclusive engineered wood flooring.
- Brings a new level of craftsmanship, quality and expression to interior design.


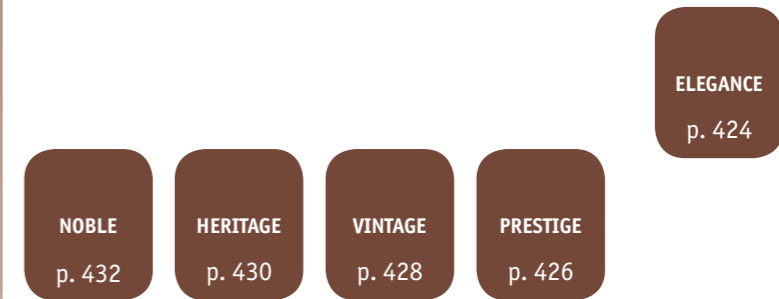


PROFESSIONAL

- Professional solutions for new housing, renovation and/or installations on joists



- Wide variety of solutions, designs & colors
- Timeless designs
- Technical performance

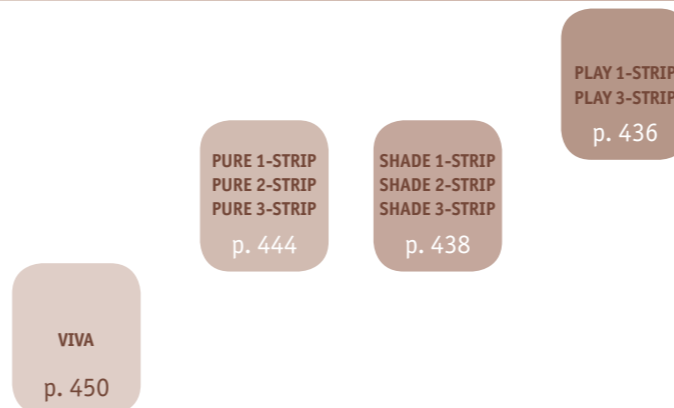

Construction	Multi-layer				Multi-layer				Multi-layer				
Thickness	10mm	13mm	14mm	22mm	8.5mm	13-14mm	13-14mm	13-14mm	16mm	14mm	14mm	14mm	22mm
Description	1-strip	3-strip			1-strip 2-strip 3-strip Mini plank	1-strip 2-strip 3-strip	1-strip 2-strip 3-strip	1-strip 3-strip	Basket Weave Big Block Small Block	1-strip 3-strip			Wide planks
Locking system	T&G	2-lock		T&G	Ultraloc	2-lock							T&G
Finishings available	Proteco Lacquer – Proteco Natura				Proteco Lacquer - Proteco Natura - Proteco Hardwax Oil			Proteco Natura	Proteco Lacquer - Proteco Hardwax Oil	Proteco Hardwax Oil			
Colours/Designs	5	2	2	1	11	27	34	10	10	10	10	6	3

ATELIER RANGES



TECHNICAL DATA	STANDARDS	Atelier				
		Elegance	Heritage	Prestige	Vintage	Noble 14mm
Characteristics						
Total thickness	EN 13489	22mm	14mm		14mm	16mm
Width	-	280mm	190/194mm	162/190/194mm	192mm	190/192mm
Length	-	2 520mm	2 000 - 2 281mm		2 028mm	2 028 - 2 280mm
Wearlayer thickness	-	4.0mm	3.5mm			
Weight	-	11.7kg/m ²	7.9kg/m ²		9.2kg/m ²	9.0 kg/m ²
Technical performance						
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	ΔL _w = 17dB with 2mm Tarkofoam/flex II				
Emission of formaldehyde	EN 13986	E1				
Reaction to fire	EN 13501-1	D _n -s1				
Thermal insulation value board only		RT = 0.152m ² K/W	RT = 0.101m ² K/W		RT = 0.132m ² K/W	
Thermal insulation value with ragfelt	EN ISO 10456:2007	RT = 0.182m ² K/W	RT = 0.121m ² K/W		RT = 0.152m ² K/W	
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.192m ² K/W	RT = 0.141m ² K/W		RT = 0.172m ² K/W	
Underfloor heating compatible		Maximum floor surface temperature 27°C with self-regulating under-floor heat system**				
Taber abramer/Lacquer's wear resistance*						
Protoco Lacquer	EN 13696	N/A	4000 revs			
Protoco Natura	EN 13696	N/A	N/A			

* Data show results with new components according to 2006 update. Method not applicable for stained, brushed or hardwax oiled products due to the structured surface.
** Not suitable for Oak Basket Weave Protoco Lacquer.

Due to the nature of the material, this table shows typical values.
The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.



Carefully crafted wood floorings made from the finest materials for homes, shops, hotels, restaurants and offices

SENSORY BENEFITS


- Exclusive flooring from specially selected wood types
- Natural wood designs enhanced by crafted elements
- Unique extra-wide planks for luxury applications
- All the natural warmth and beauty of real wood
- Extensive range of installation and care accessories, such as skirting boards, mouldings and pipe covers in different wood finishes to add the final touch

FUNCTIONAL BENEFITS

- Stable, multi-layer structure to minimise movement in changeable humidity
- Protoco – one of the strongest protective surfaces available

ENVIRONMENTAL BENEFITS

- High durability, good acoustics and long life expectancy.
- Very low VOC emission values for better indoor air quality
- Suitable for self-regulating under-floor heating systems (max 27 °C)
- Easy to clean and maintain with no need for aggressive detergents
- All our parquet floors from 10mm thickness are Cradle to Cradle® certified

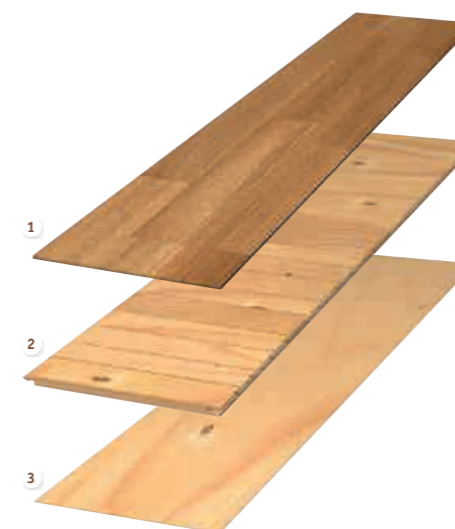

MULTILAYER WOOD SOLUTIONS

- 1 Wear layer of real wood
- 2 Strong and supportive middle layer with transverse wood fibres of pine and spruce
- 3 Stabilising bottom layer


ELEGANCE



Elegance - Oak Champagne



41008 001



41008 002



41008 004

TECHNICAL DATA	STANDARDS	Elegance
Characteristics		
Total thickness	EN 13489	22mm
Width	-	280mm
Length	-	2 520mm
Wearlayer thickness	-	4,0mm
Weight	-	11.7kg/m ²
Technical performance		
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17\text{dB}$ with 2mm Tarkofoam/flex II
Emission of formaldehyde	EN 13986	E1
Reaction fo fire	EN 13501-1	D _{fl} -s1
Thermal insulation value board only		RT = 0.152m ² K/W
Thermal insulation value with ragfelt	EN ISO 10456:2007	RT = 0.182m ² K/W
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.192m ² K/W
Underfloor heating compatible		Maximum floor surface temperature 27°C with self-regulating under-floor heat system
Taber abraser/Lacquer's wear resistance*		
Protoco Lacquer	EN 13696	N/A
Protoco Natura	EN 13696	N/A

* Data show results with new components according to 2006 update. Method not applicable for stained, brushed or hardwax oiled products.

Due to the nature of the material this table shows typical values. The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

ELEGANCE

Main Product Features

- 22mm thick and 2520mm long with a 4 mm wear layer (can be re-sanded 3-4 times)
- Minibevel length- and shortwise
- Protoco Hardwax oil
- T&G profile
- Recommended for glue down installation


Surface Treatment



Logistics Information



Sustainability Tag



General Information



PRESTIGE



Prestige - Oak Sand




162 x 2200mm 7967 018



190 x 2200mm 7877 046



190 x 2200mm 7877 048



190 x 2000mm 7877 047



194 x 2281mm 7870 058

TECHNICAL DATA	STANDARDS	Prestige
Characteristics		
Total thickness	EN 13489	14mm
Width	-	162, 190, 194mm
Length	-	2000-2281mm
Wearlayer thickness	-	3.5mm
Weight	-	7.9kg/m ²
Technical performance		
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17\text{dB}$ with 2mm Tarkofoam/flex II
Emission of formaldehyde	EN 13986	E1
Reaction fo fire	EN 13501-1	D _{s1} -s1
Thermal insulation value board only		RT = 0.101m ² K/W
Thermal insulation value with ragfelt	EN ISO 10456:2007	RT = 0.121m ² K/W
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.141m ² K/W
Underfloor heating compatible		Maximum floor surface temperature 27°C with self-regulating under-floor heat system
Taber abraser/Lacquer's wear resistance*		
Protoco Lacquer	EN 13696	N/A
Protoco Natura	EN 13696	N/A

* Data show results with new components according to 2006 update. Method not applicable for stained, brushed or hardwax oiled products.

Due to the nature of the material this table shows typical values. The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

PRESTIGE

Main Product Features


- 14mm thick with a wear layer of 3.5mm (can be re-sanded 3-4 times)
- The worn effect from a new brushing technique resembles the natural wear and tear like done from sun, wind and water
- Protoco Hardwax Oil
- User friendly, glue-free locking system: 2-lock



Surface Treatment




Logistics Information

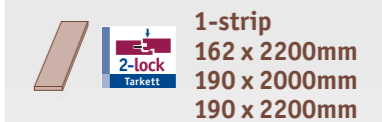

Sustainability Tag



General Information

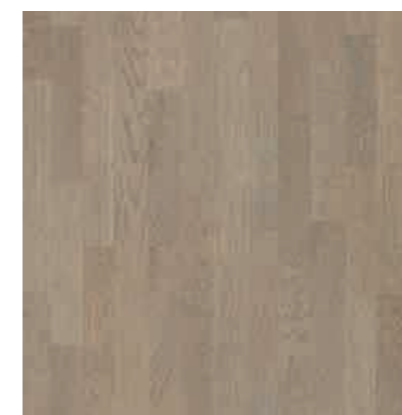

194 x 2281mm 7870 059

VINTAGE



Vintage - Oak Salamanca



Oak Uppsala

● 162 x 2000mm 7876 105



Oak Copenhagen

● 190 x 2000mm 7877 040




Oak Montpellier

● 190 x 2200mm 7877 041



Oak Lund

● 190 x 2000mm 7877 043



Oak Salamanca

● 190 x 2000mm 7877 044



Oak Chester

● 190 x 2200mm 7877 042




Oak Padua

● 190 x 2000mm 7877 045



Oak Cambridge

● 194 x 2281mm 7870 062



Oak Bologna

● 194 x 2281mm 7870 063

TECHNICAL DATA	STANDARDS	Vintage
Characteristics		
Total thickness	EN 13489	14mm
Width	-	162, 190, 194mm
Length	-	2000-2281mm
Wearlayer thickness	-	3.5mm
Weight	-	7.9kg/m ²
Technical performance		
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17\text{dB}$ with 2mm Tarkofoam/flex II
Emission of formaldehyde	EN 13986	E1
Reaction fo fire	EN 13501-1	D _{s1} -s1
Thermal insulation value board only		RT = 0.101m ² K/W
Thermal insulation value with ragfelt	EN ISO 10456:2007	RT = 0.121m ² K/W
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.141m ² K/W
Underfloor heating compatible		Maximum floor surface temperature 27°C with self-regulating under-floor heat system
Taber abramer/Lacquer's wear resistance*		
Protoco Lacquer	EN 13696	N/A
Protoco Natura	EN 13696	N/A

* Data show results with new components according to 2006 update. Method not applicable for stained, brushed or hardwax oiled products.

Due to the nature of the material this table shows typical values. The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

VINTAGE

Main Product Features

- 14mm thick with a wear layer of 3.5mm (can be re-sanded 3-4 times)
- Mechanical stressed and stained surface for a vintage look
- Protoco Hardwax Oil
- User friendly, glue-free locking system: 2-lock




Surface Treatment




Logistics Information



Sustainability Tag



General Information

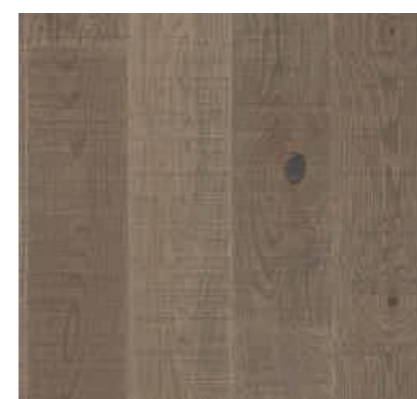


Oak Orleans

● 162 x 2000mm 7876 104

HERITAGE



Heritage - Oak

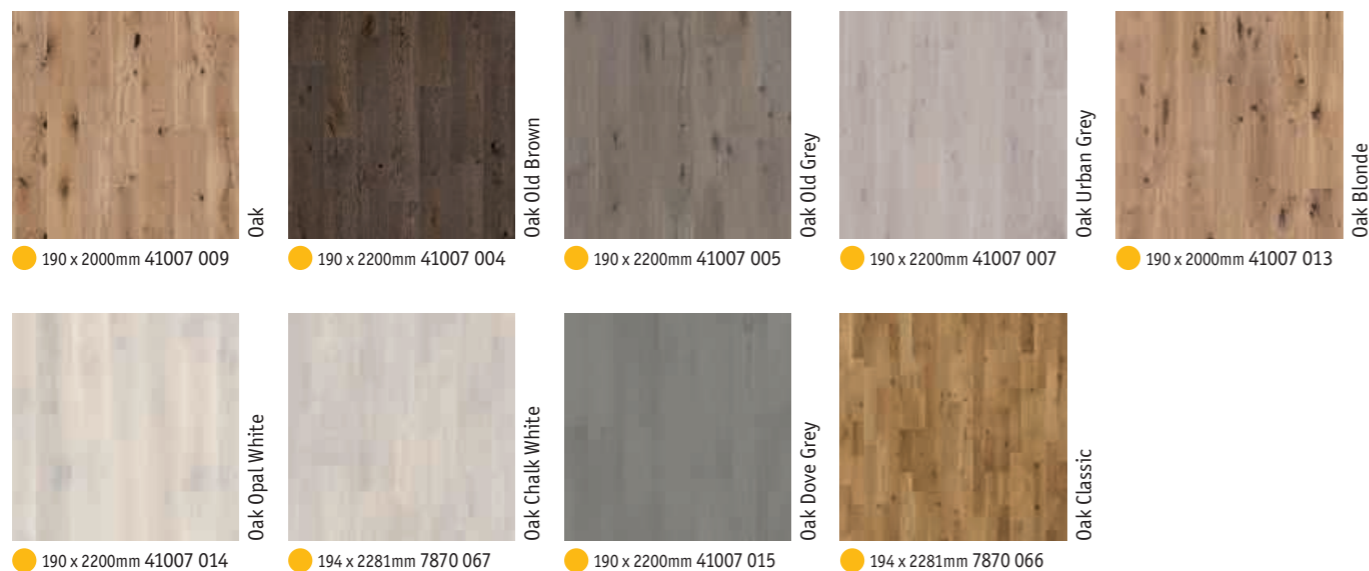

TECHNICAL DATA	STANDARDS	Heritage
Characteristics		
Total thickness	EN 13489	14mm
Width	-	190/194mm
Length	-	2 000 - 2 281mm
Wearlayer thickness	-	3.5mm
Weight	-	7.9kg/m ²
Technical performance		
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17\text{dB}$ with 2mm Tarkofoam/flex II
Emission of formaldehyde	EN 13986	E1
Reaction to fire	EN 13501-1	D _{s1} -s1
Thermal insulation value board only		RT = 0.101m ² K/W
Thermal insulation value with ragfelt	EN ISO 10456:2007	RT = 0.121m ² K/W
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.141m ² K/W
Underfloor heating compatible		Maximum floor surface temperature 27°C with self-regulating under-floor heat system
Taber abramer/Lacquer's wear resistance*		
Protoco Lacquer	EN 13696	N/A
Protoco Natura	EN 13696	N/A

* Data show results with new components according to 2006 update. Method not applicable for stained, brushed or hardwax oiled products.

Due to the nature of the material this table shows typical values. The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

HERITAGE

Main Product Features


- 14mm thick with a wear layer of 3.5mm (can be re-sanded 3-4 times)
- Deep brushed surface and an extra rustic look
- Protoco hardwax oil
- User friendly, glue-free locking system: 2-lock



Surface Treatment



Logistics Information

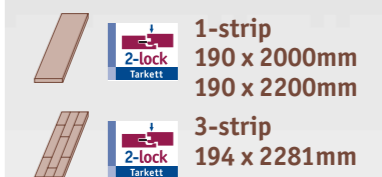

Sustainability Tag



General Information





Noble - Oak Retro



Oak Retro

● 14x192x2028mm 7806 003
16x192x2028mm 7806 007



Oak Scandinavia

● 14x192x2028mm 7806 004
16x192x2028mm 7806 008



Oak Wasa

● 14x192x2028mm 7806 006
16x192x2028mm 7806 010




Oak Greenwīch

● 190 x 2280mm 7806 011



Oak Soho

● 190 x 2280mm 7806 012



Oak Broadway

● 190 x 2280mm 7806 013



Oak Manhattan

● 190 x 2280mm 7806 014



Oak Chelsea

● 190 x 2280mm 7806 016

TECHNICAL DATA	STANDARDS	Noble	
Characteristics			
		14mm construction will change to 16 mm during 2017.	
Total thickness	EN 13489	14mm	16mm
Width	-	192mm	190/192mm
Length	-	2 028mm	2 028 - 2 280mm
Wearlayer thickness	-	3.5mm	3.5mm
Weight	-	9.2kg/m ²	9.0kg/m ²
Technical performance			
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17\text{dB}$ with 2mm Tarkofoam/flex II	
Emission of formaldehyde	EN 13986	E1	
Reaction fo fire	EN 13501-1	D _n -s1	
Thermal insulation value board only		RT = 0.101m ² K/W	RT = 0.132m ² K/W
Thermal insulation value with ragfelt	EN ISO 10456:2007	RT = 0.121m ² K/W	RT = 0.152m ² K/W
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.141m ² K/W	RT = 0.172m ² K/W
Underfloor heating compatible		Maximum floor surface temperature 27°C with self-regulating under-floor heat system	
Taber abraser/Lacquer's wear resistance*			
Protoco Lacquer	EN 13696	4000 revs	
Protoco Natura	EN 13696	N/A	

* Data show results with new components according to 2006 update. Method not applicable for stained, brushed or hardwax oiled products.

Due to the nature of the material this table shows typical values. The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

NOBLE

Main Product Features


- 14/16mm thick with a wear layer of 3.5mm (can be re-sanded 3-4 times)
- A timeless floor in a classic wood pattern but with a new twist creates an exciting surface
- Protoco Lacquer/Protoco Hardwax Oil
- User friendly, glue-free locking system: 2-lock




Surface Treatment




Logistics Information

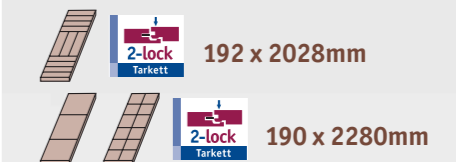

Sustainability Tag



General Information

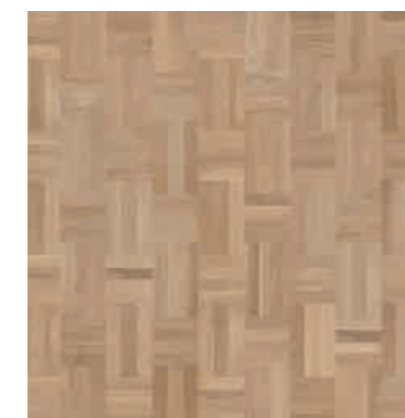

Oak Art Deco

● 14x192x2028mm 7806 005
16x192x2028mm 7806 009

PLAY, SHADE, PURE & VIVA



Experience the natural feel of wood flooring, beautiful and practical for everyday life

SENSORY BENEFITS

- Wood floors in a variety of species, patterns and stains to meet most design needs
- Multiple lengths, widths and thicknesses for flexible use
- Viva: veneered floor available in a host of designs and patterns
- Extensive range of installation and care accessories, such as skirting boards, mouldings and pipe covers in different wood finishes to add the final touch

FUNCTIONAL BENEFITS

- Stable, multi-layer structure to minimise movement in changeable humidity
- Proteco – one of the strongest protective surfaces available - comes in lacquer, matt lacquer and hardwax oil

- Easy, fast and safe installation with Tarkett's glue-free locking system
- Viva's slimline structure is ideal for renovations

ENVIRONMENTAL BENEFITS

- High durability, good acoustics and long life expectancy
- Very low VOC emission values for better indoor air quality
- Suitable for self-regulating under-floor heating systems (max 27°C)
- Easy to clean and maintain with no need for aggressive detergents
- All our parquet floors from 10mm thickness are Cradle to Cradle® certified

TECHNICAL DATA	STANDARDS	Play		Shade		Pure		Viva
Characteristics								
Total thickness	EN 13489	13mm	14mm	13mm	14mm	13mm	14mm	8.5mm
Width	-	162/194mm		134/162/190/194mm		162/190/194mm		110/190mm
Length	-	2 000 - 2 520mm		1 850 - 2 520mm		2 000 - 2 281mm		1 220mm
Wearlayer thickness	-	2.5mm	3.5mm	2.5mm	3.5mm	2.5mm	3.5mm	0.6mm
Weight	-	7.3kg/m ²	7.9kg/m ²	7.3kg/m ²	7.9kg/m ²	7.3kg/m ²	7.9kg/m ²	7.7kg/m ²
Technical performance								
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	ΔL _w = 17dB with 2mm Tarkofoam/flex II						
Emission of formaldehyde	EN 13986	E1						
Reaction fo fire	EN 13501-1	D _f						
Thermal insulation value board only	EN ISO 10456:2007	RT = 0.101m ² K/W						RT = 0.054m ² K/W
Thermal insulation value with ragfelt		RT = 0.121m ² K/W						RT = 0.074m ² K/W
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.141m ² K/W						RT = 0.094m ² K/W
Underfloor heating compatible		Maximum floor surface temperature 27°C with self-regulating under-floor heat system**						
Taber abraser/Lacquer's wear resistance*								
Proteco Lacquer	EN 13696	4000 revs						
Proteco Natura	EN 13696	3500 revs						


* Data show results with new components according to 2006 update. Method not applicable for stained, brushed or hardwax oiled products.

** Not suitable for the woodspecies beech and maple, except in Viva.

Due to the nature of the material this table shows typical values.

The above information is subject to modifications for the benefit of further improvement (02/2017).

For more detailed technical information, please contact Tarkett.

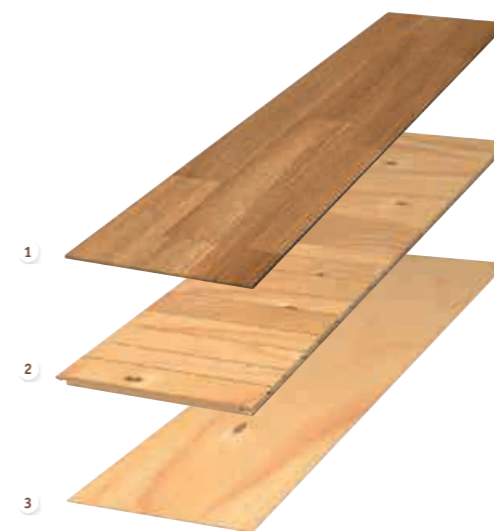

MULTILAYER WOOD SOLUTIONS

- 1 Wear layer of real wood
- 2 Strong and supportive middle layer with transverse wood fibres of pine and spruce
- 3 Stabilising bottom layer



Play - Oak Winter Plank



Oak Winter Plank

- 162 x 2000mm 7876 007
- 162 x 2520mm 7876 024



Oak Autumn Plank

- 162 x 2200mm 7876 098




Oak Java Plank

- 162 x 2000mm 7885 003
- 162 x 2200mm 7885 004



Oak Marble Plank

- 162 x 2200mm 7876 009



Oak Charcoal Plank

- 162 x 2000mm 7876 106



Oak Black Plank

- 162 x 2000mm 7876 082



Oak Black TreS

- 194 x 2281mm 7870 035

TECHNICAL DATA	STANDARDS	Play				
Size and package		13x162 x2000	14x162 x2000	14x162 x2200	14x162 x2520	14x194 x2281
Characteristics						
Total thickness	EN 13489	13mm				
Width	-	162mm			194mm	
Length	-	2000mm	2000mm	2200mm	2520mm	2281mm
Wearlayer thickness	-	2.5mm				
Weight	-	7.3kg/m ²				
Technical performance						
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17\text{dB}$ with 2mm Tarkofoam/flex II				
Emission of formaldehyde	EN 13986	E1				
Reaction fo fire	EN 13501-1	D _{fl} -s1				
Thermal insulation value board only		RT = 0.101m ² K/W				
Thermal insulation value with ragfelt	EN ISO 10456:2007	RT = 0.121m ² K/W				
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.141m ² K/W				
Thermal conductivity	EN 12664 / EN 14342:2013	0.104 W/mK				
Taber abraser/Lacquer's wear resistance*						
Proteco Natura	EN 13696	N/A				

* Data show results with new components according to 2006 update. Method not applicable for stained, brushed or hardwax oiled products.

** Not suitable for the woodspecies beech and maple, except in Viva.

Due to the nature of the material this table shows typical values. The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

PLAY

Main Product Features

- A collection of floors that highlights the quality of the wood through new and experimental effects on its surface, giving every board a touch of the extraordinary
- Three layer construction with excellent stability
- User friendly, glue-free locking system: 2-lock

Surface Treatment




Logistics Information




Sustainability Tag

Play 13mm Proteco Natura



Play 14mm Proteco Natura



General Information



Ash Ivory Plank

- 162 x 2000mm 41006 008

SHADE



Shade - Oak Cotton White TreS



TECHNICAL DATA	STANDARDS	Shade					
Size and package		13x134 x1850	13x162 x2000/ 2200/ 2520	13x194 x2281	14x162 x2000/ 2200/ 2520	14x190x2000/ 2200/2520	14x194 x2281
Characteristics							
Total thickness	EN 13489	13mm			14mm		
Width	-	134mm	162mm	194mm	162mm	190mm	194mm
Length	-	1850mm	2000/ 2200mm	2281mm	2000/ 2200/ 2520mm	2000mm	2000/ 2200/ 2520mm
Wearlayer thickness	-	2.5mm			3.5mm		
Weight	-	7.3kg/m ²			7.9kg/m ²		
Technical performance							
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17\text{dB}$ with 2mm Tarkofoam/flex II					
Emission of formaldehyde	EN 13986	E1					
Reaction to fire	EN 13501-1	D _n -s1					
Thermal insulation value board only		RT = 0.101m ² K/W					
Thermal insulation value with ragfelt	EN ISO 10456:2007	RT = 0.121m ² K/W					
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.141m ² K/W					
Thermal conductivity	EN 12664 / EN 14342:2013	0.104 W/mK			0.11 W/mK		
Taber abramer/Lacquer's wear resistance*							
Protoco Lacquer		N/A					
Protoco Natura	EN 13696	N/A					
Protoco Hardwax Oil		N/A					

* These typical values are not applicable for stained, brushed or hardwax oiled products. Due to the nature of the material this table shows typical values. The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

SHADE

Main Product Features

- This elegant collection enhances the warmth of wood using a wide palette of light and dark colors in soft and natural tones to highlight each authentic and unique design
- Three layer construction with excellent stability
- User friendly, glue-free locking system: 2-lock

Surface Treatment



Logistics Information



Sustainability Tag

Shade 13mm Protoco Natura / 14mm Protoco Hardwax Oil



Shade 14mm Protoco Lacquer / Protoco Natura



General Information












SHADE



Shade - Ash Melange TreS



 ● 190 x 2000mm 7877 049	 ● 134 x 1850mm 41016 001	 ● 194 x 2281mm 8727 901	 ● 194 x 2281mm 7870 030
 ● 190 x 2520mm 7877 014 ● 190 x 2200mm 7877 002 ● 190 x 2000mm 7877 013	 ● 162 x 2520mm 7876 022 ● 162 x 2200mm 7876 021 ● 162 x 2000mm 7876 020	 ● 190 x 2200mm 7877 050	 ● 194 x 2281mm 8727 009
 ● 162 x 2200mm 7876 091 ● 162 x 2000mm 7876 095	 ● 194 x 2281mm 7870 037	 ● 162 x 2200mm 7876 089 ● 162 x 2000mm 7876 090	 ● 194 x 2281mm 7870 036

TECHNICAL DATA	STANDARDS	Shade					
		13x134 x1850	13x162 x2000/2200/2520	13x194 x2281	14x162 x2000/2200/2520	14x190x2000/2200/2520	14x194 x2281
Characteristics							
Total thickness	EN 13489	13mm			14mm		
Width	-	134mm	162mm	194mm	162mm	190mm	194mm
Length	-	1850mm	2000/2200mm	2281mm	2000/2200/2520mm	2000mm	2281mm
Wearlayer thickness	-	2.5mm			3.5mm		
Weight	-	7.3kg/m ²			7.9kg/m ²		
Technical performance							
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	ΔL _w = 17dB with 2mm Tarkofoam/flex II					
Emission of formaldehyde	EN 13986	E1					
Reaction to fire	EN 13501-1	D _n -s1					
Thermal insulation value board only	EN ISO 10456:2007	RT = 0.101m ² K/W					
Thermal insulation value with ragfelt		RT = 0.121m ² K/W					
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.141m ² K/W					
Thermal conductivity	EN 12664 / EN 14342:2013	0.104 W/mK			0.11 W/mK		
Taber abraser/Lacquer's wear resistance*							
Protecto Lacquer	EN 13696	N/A					
Protecto Natura		N/A					
Protecto Hardwax Oil		N/A					

* These typical values are not applicable for stained, brushed or hardwax oiled products. Due to the nature of the material this table shows typical values. The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.



● 194 x 2281mm 7965 011

SHADE


Main Product Features

- This elegant collection enhances the warmth of wood using a wide palette of light and dark colors in soft and natural tones to highlight each authentic and unique design
- Three layer construction with excellent stability
- User friendly, glue-free locking system: 2-lock

Surface Treatment




Logistics Information




Sustainability Tag

Shade 13mm Protecto Natura / 14mm Protecto Hardwax Oil

98% 98% Natural Renewable	100% Recyclable	
------------------------------------	--------------------	---

Shade 14mm Protecto Lacquer / Protecto Natura

97% 97% Natural Renewable	100% Recyclable	
------------------------------------	--------------------	---

General Information

	Shade 0190-0103-DoP-2015-12 http://professionals.tarkett.com Manufactured by: Tarkett Sp. z o.o. PL-62-322 Orzechowo EN 14342:2005
---	---

	Shade 0020-0104-DoP-2015-12 http://professionals.tarkett.com Manufactured by: Tarkett AB, SE-289 89 Hanaskog EN 14342:2005
---	---

	Shade 0190-0105-DoP-2015-12 http://professionals.tarkett.com Manufactured by: Tarkett Sp. z o.o. PL-62-322 Orzechowo EN 14342:2005
---	---












	Shade 0020-0106-DoP-2015-12 http://professionals.tarkett.com Manufactured by: Tarkett AB, SE-289 89 Hanaskog EN 14342:2005
---	---

SHADE




Shade - Oak Antique White Plank



 ● 190 x 2000mm 7877 051	 ● 194 x 2281mm 7870 064	 ● 162 x 2000mm 7876 088	 ● 194 x 2281mm 8727 006	 ● 194 x 2281mm 7870 053
 ● 162 x 2000mm 7878 010	 ● 134 x 1850mm 4101 6002	 ● 194 x 2281mm 7870 065	 ● 194 x 2281mm 7870 052	
 ● 162 x 2000mm 7876 094 ● 162 x 2000mm 7876 031	 ● 194 x 2281mm 7870 040			

TECHNICAL DATA	STANDARDS	Shade					
Size and package		13x134 x1850	13x162 x2000/2200/2520	13x194 x2281	14x162 x2000/2200/2520	14x190x2000/2200/2520	14x194 x2281
Characteristics							
Total thickness	EN 13489	13mm			14mm		
Width	-	134mm	162mm	194mm	162mm	190mm	194mm
Length	-	1850mm	2000/2200mm	2281mm	2000/2200/2520mm	2000mm	2281mm
Wearlayer thickness	-	2.5mm			3.5mm		
Weight	-	7.3kg/m ²			7.9kg/m ²		
Technical performance							
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	ΔL _w = 17dB with 2mm Tarkofoam/flex II					
Emission of formaldehyde	EN 13986	E1					
Reaction to fire	EN 13501-1	D _n >s1					
Thermal insulation value board only		RT = 0.101m ² K/W					
Thermal insulation value with ragfelt	EN ISO 10456:2007	RT = 0.121m ² K/W					
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.141m ² K/W					
Thermal conductivity	EN 12664 / EN 14342:2013	0.104 W/mK			0.11 W/mK		
Taber abraser/Lacquer's wear resistance*							
Protoco Lacquer		N/A					
Protoco Natura	EN 13696	N/A					
Protoco Hardwax Oil		N/A					

* These typical values are not applicable for stained, brushed or hardwax oiled products. Due to the nature of the material this table shows typical values. The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

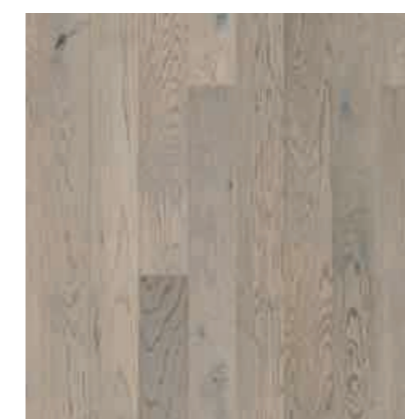

● 162 x 2520mm 7876 085

SHADE

Main Product Features

- This elegant collection enhances the warmth of wood using a wide palette of light and dark colors in soft and natural tones to highlight each authentic and unique design
- Three layer construction with excellent stability
- User friendly, glue-free locking system: 2-lock

Surface Treatment




Logistics Information




Sustainability Tag

Shade 13mm Protoco Natura / 14mm Protoco Hardwax Oil

98% 98% Natural Renewable	100% Recyclable	
------------------------------------	--------------------	---

Shade 14mm Protoco Lacquer / Protoco Natura

97% 97% Natural Renewable	100% Recyclable	
------------------------------------	--------------------	---

General Information





Pure - Oak Nature TreS



Oak Select TreS

● 14x194x2281mm 7870 024



Oak Nature Plank XT

● 14x190x2200mm 7877 027



Oak Nature DuoPlank

● 13x194x2281mm 8727 002



Oak Nature TreS

● 14x194x2281mm 7869 015
 ● 13x194x2281mm 8723 001
 ● 14x194x2281mm 7869 017
 ● 13x194x2281mm 8723 004
 ● 14x194x2281mm 7870 038

TECHNICAL DATA	STANDARDS	Pure					
		13x162 x2000/ 2200	13x190 x2000/ 2200	13x194 x2281	14x162 x2000/ 2200	14x190 x2000/ 2200	14x194 x2281
Size and package							
Characteristics							
Total thickness	EN 13489	13mm			14mm		
Width	-	162mm	190mm	194mm	162mm	190mm	194mm
Length	-	2000/2200mm		2281mm	2000/2200mm		2281mm
Wearlayer thickness	-	2.5mm			3.5mm		
Weight	-	7.3kg/m ²			7.9kg/m ²		
Technical performance							
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17\text{dB}$ with 2mm Tarkofoam/flex II					
Emission of formaldehyde	EN 13986	E1					
Reaction fo fire	EN 13501-1	D _{fl} -s1					
Thermal insulation value board only		RT = 0.101m ² K/W					
Thermal insulation value with ragfelt	EN ISO 10456:2007	RT = 0.121m ² K/W					
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.141m ² K/W					
Thermal conductivity	EN 12664 / EN 14342:2013	0.104 W/mK			0.11 W/mK		
Taber abramer/Lacquer's wear resistance*							
Protoco Lacquer		4000 revs					
Protoco Natura	EN 13696	3500 revs					
Protoco Hardwax Oil		N/A					

* These typical values are not applicable for stained, brushed or hardwax oiled products. Due to the nature of the material this table shows typical values. The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.



Oak Nature Plank

● 14x162x2200mm 7876 001
 ● 14x162x2200mm 7876 070
 ● 14x162x2000mm 7876 069
 ● 13x162x2200mm 7878 002
 ● 13x162x2000mm 7878 001

PURE


Main Product Features

- The authentic design of Mother Nature is left untouched in this collection that enhances and preserves the unique character of each board, to create floors with an everlasting style
- Three layer construction with excellent stability
- User friendly, glue-free locking system: 2-lock

Surface Treatment




Logistics Information




Sustainability Tag

Pure 13mm Protoco Lacquer / Protoco Natura / 14mm Protoco Hardwax Oil



Pure 14mm Protoco Lacquer / Protoco Natura



General Information





Pure - Oak Nature Plank



Oak Nature TreS (brushed)

● 14x194x2281mm 7870 061



Oak Rustic Plank XT

● 14x190x2200mm 7877 032
● 14x190x2000mm 7877 031
● 13x190x2200mm 7879 004
● 13x190x2000mm 7879 003



Oak Rustic Plank

● 14x162x2200mm 7876 080
● 14x162x2000mm 7876 079
● 14x162x2200mm 7876 037
● 14x162x2000mm 7876 030



Oak Rustic DuoPlank

● 13x194x2281mm 8727 003

TECHNICAL DATA	STANDARDS	Pure					
		13x162x2000/2200	13x190x2000/2200	13x194x2281	14x162x2000/2200	14x190x2000/2200	14x194x2281
Size and package							
Characteristics							
Total thickness	EN 13489	13mm			14mm		
Width	-	162mm	190mm	194mm	162mm	190mm	194mm
Length	-	2000/2200mm		2281mm	2000/2200mm		2281mm
Wearlayer thickness	-	2.5mm			3.5mm		
Weight	-	7.3kg/m ²			7.9kg/m ²		
Technical performance							
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	ΔL _w = 17dB with 2mm Tarkofoam/flex II					
Emission of formaldehyde	EN 13986	E1					
Reaction fo fire	EN 13501-1	D _{fl} -s1					
Thermal insulation value board only		RT = 0.101m ² K/W					
Thermal insulation value with ragfelt	EN ISO 10456:2007	RT = 0.121m ² K/W					
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.141m ² K/W					
Thermal conductivity	EN 12664 / EN 14342:2013	0.104 W/mK			0.11 W/mK		
Taber abramer/Lacquer's wear resistance*							
Protoco Lacquer		4000 revs					
Protoco Natura	EN 13696	3500 revs					
Protoco Hardwax Oil		N/A					

* These typical values are not applicable for stained, brushed or hardwax oiled products. Due to the nature of the material this table shows typical values. The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.



Oak Rustic TreS

● 13x194x2281mm 8723 020
● 14x194x2281mm 7867 005

PURE

Main Product Features

- The authentic design of Mother Nature is left untouched in this collection that enhances and preserves the unique character of each board, to create floors with an everlasting style
- Three layer construction with excellent stability
- User friendly, glue-free locking system: 2-lock

Surface Treatment




Logistics Information



Sustainability Tag

Pure 13mm Protoco Lacquer / Protoco Natura / 14mm Protoco Hardwax Oil



Pure 14mm Protoco Lacquer / Protoco Natura



General Information





Pure - Oak Nature Plank



Oak Antique Plank

● 14x162x2200mm 7876 018



Maple Nature TreS

● 14x194x2281mm 8517 003



Birch TreS

● 14x194x2281mm 8540 002



Ash Nature TreS

● 14x194x2281mm 7965 005
● 14x194x2281mm 7965 008



Beech Nature TreS

● 14x194x2281mm 7930 003

TECHNICAL DATA	STANDARDS	Pure					
		13x162 x2000/2200	13x190 x2000/2200	13x194 x2281	14x162 x2000/2200	14x190 x2000/2200	14x194 x2281
Characteristics							
Total thickness	EN 13489	13mm			14mm		
Width	-	162mm	190mm	194mm	162mm	190mm	194mm
Length	-	2000/2200mm		2281mm	2000/2200mm		2281mm
Wearlayer thickness	-	2.5mm			3.5mm		
Weight	-	7.3kg/m ²			7.9kg/m ²		
Technical performance							
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	ΔL _w = 17dB with 2mm Tarkofoam/flex II					
Emission of formaldehyde	EN 13986	E1					
Reaction fo fire	EN 13501-1	D _{fl} -s1					
Thermal insulation value board only		RT = 0.101m ² K/W					
Thermal insulation value with ragfelt	EN ISO 10456:2007	RT = 0.121m ² K/W					
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.141m ² K/W					
Thermal conductivity	EN 12664 / EN 14342:2013	0.104 W/mK			0.11 W/mK		
Taber abramer/Lacquer's wear resistance*							
Protecto Lacquer		4000 revs					
Protecto Natura	EN 13696	3500 revs					
Protecto Hardwax Oil		N/A					

* These typical values are not applicable for stained, brushed or hardwax oiled products. Due to the nature of the material this table shows typical values. The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.



Walnut TreS

● 14x194x2281mm 8577 007
● 14x194x2281mm 8577 008

PURE


Main Product Features

- The authentic design of Mother Nature is left untouched in this collection that enhances and preserves the unique character of each board, to create floors with an everlasting style
- Three layer construction with excellent stability
- User friendly, glue-free locking system: 2-lock

Surface Treatment



Logistics Information



Sustainability Tag

Pure 13mm Protecto Lacquer / Protecto Natura / 14mm Protecto Hardwax Oil



Pure 14mm Protecto Lacquer / Protecto Natura



General Information



VIVA / VIVA LINE



Viva - Oak (3-strip)




Viva 2-strip
190 x 1220mm



Viva 3-strip
190 x 1220mm



Viva Line
110 x 1220mm

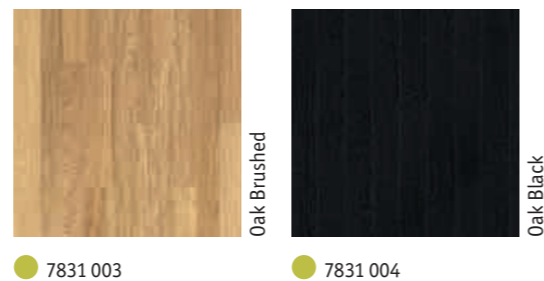

TECHNICAL DATA	STANDARDS	Viva Line	Viva
Size and package		8.5x110x1220	8.5x190x1220
Characteristics			
Total thickness	EN 14354	8.5mm	
Width	-	110mm	190mm
Length	-	1220mm	
Wearlayer thickness	-	0.6mm	
Weight	-	7.7kg/m ²	
Technical performance			
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17\text{dB}$ with 2mm Tarkofoam/flex II	
Emission of formaldehyde	EN 13986	E1	
Reaction to fire	EN 13501-1	D _n -s1	
Thermal insulation value board only		RT = 0.054m ² K/W	
Thermal insulation value with ragfelt	EN ISO 10456:2007	RT = 0.074m ² K/W	
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.094m ² K/W	
Thermal conductivity	EN 12664 / EN 14342:2013	0.14 W/m K	
Taber abraser/Lacquer's wear resistance*			
Proteco Lacquer		4000 revs	
Proteco Natura	EN 13696	3500 revs	

* These typical values are not applicable for stained, brushed or hardwax oiled products.

Due to the nature of the material this table shows typical values. The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

VIVA / VIVA LINE 3-strip / 2-strip / 1-strip


Main Product Features

- 8.5 mm floor with a thin veneer layer on top of an HDF core, giving you a hard and durable floor with good acoustic comfort
- Very hard surface (brinell value 6)
- Refreshable but not re-sandable


Surface Treatment



Logistics Information

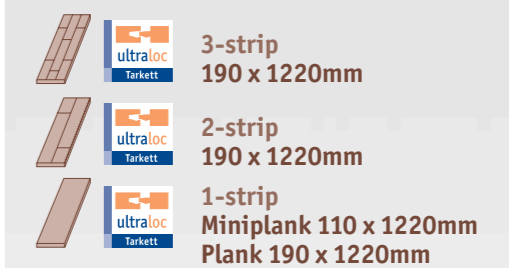

Sustainability Tag




General Information



Viva 1-strip
190 x 1220mm

Viva Line
110 x 1220mm

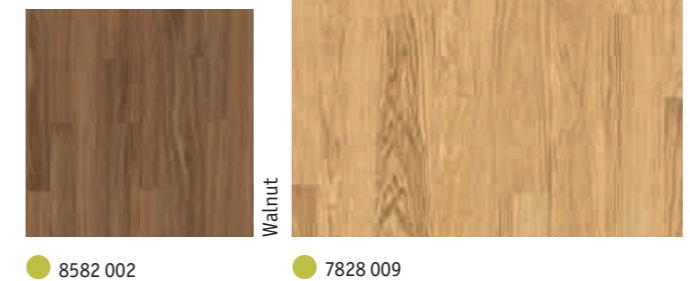

PROFESSIONAL



Real wooden floors
for special applications
in homes, shops, hotels,
restaurants and offices

SENSORY BENEFITS

- A limited range of 3-strip and small planks for special applications
- Standard patterns in oak with or without stain
- Extensive range of installation and care accessories, such as skirting boards, mouldings and pipe covers in different wood finishes to add the final touch

FUNCTIONAL BENEFITS

- Limited selection of flooring formats ideal for special applications
- Professional 22mm, 3-strip design for installation on joists or floating
- Professional 10mm planks: suitable for the renovation market as a very stable alternative for locations where low structural height is required
- Optimised package dimensions for easier handling on installation site


ENVIRONMENTAL BENEFITS

- High durability, good acoustics and long life expectancy
- Very low VOC emission values for better indoor air quality
- Suitable for self-regulating under-floor heating systems (max 27°C)
- Easy to clean and maintain with no need for aggressive detergents
- All our parquet floors from 10 mm thickness are Cradle to Cradle® certified

TECHNICAL DATA	STANDARDS	Professional 10	Professional 13	Professional 14	Professional 22
Characteristics					
Total thickness	EN 13489	10mm	13mm	14mm	22mm
Width	-	162mm	194mm	194mm	194mm
Length	-	1245mm	2027mm	2027mm	2535mm
Wearlayer thickness	-	2.5mm	2.5mm	3.5mm	3.5mm
Weight	-	5.4kg/m ²	7.3kg/m ²	7.9kg/m ²	10.6kg/m ²
Technical performance					
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	ΔL _w = 17dB with 2mm Tarkofoam/flex II			
Emission of formaldehyde	EN 13986	E1			
Reaction fo fire	EN 13501 -1	D _n -s1			
Thermal insulation value board only		RT = 0.079m ² K/W	RT = 0.101m ² K/W	RT = 0.152m ² K/W	
Thermal insulation value with ragfelt	EN ISO 10456:2007	RT = 0.099m ² K/W	RT = 0.121m ² K/W	RT = 0.182m ² K/W	
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.119m ² K/W	RT = 0.141m ² K/W	RT = 0.192m ² K/W	
Underfloor heating compatible		Maximum floor surface temperature 27°C with self-regulating under-floor heat system			
Taber abramer/Lacquer's wear resistance*					
Proteco Lacquer	EN 13696	4000 revs			
Proteco Natura	EN 13696	3500 revs			

* Data show results with new components according to 2006 update. Method not applicable for stained, brushed or hardwax oiled products. Due to the nature of the material this table shows typical values.

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

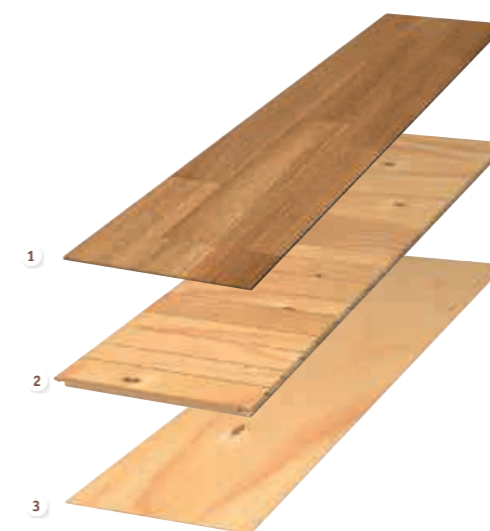

MULTILAYER WOOD SOLUTIONS

- 1 Wear layer of real wood
- 2 Strong and supportive middle layer with transverse wood fibres of pine and spruce
- 3 Stabilising bottom layer

PROFESSIONAL 22



Professional 22 - Oak Nature

TECHNICAL DATA	STANDARDS	Professional 22
Characteristics		
Total thickness	EN 13489	22mm
Width	-	194mm
Length	-	2535mm
Wearlayer thickness	-	3.5mm
Weight	-	10.6kg/m ²
Technical performance		
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17\text{dB}$ with 2mm Tarkofoam/flex II
Emission of formaldehyde	EN 13986	E1
Reaction fo fire	EN 13501 -1	D _n -s1
Thermal insulation value board only		RT = 0.152m ² K/W
Thermal insulation value with ragfelt	EN ISO 10456:2007	RT = 0.182m ² K/W
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.192m ² K/W
Underfloor heating compatible		Maximum floor surface temperature 27°C with self-regulating under-floor heat system
Taber abraser/Lacquer's wear resistance*		
Proteco Lacquer	EN 13696	4000 revs
Proteco Natura	EN 13696	3500 revs

* Data show results with new components according to 2006 update. Method not applicable for stained, brushed or hardwax oiled products. Due to the nature of the material this table shows typical values. The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.



Oak Nature

● 7825 011

PROFESSIONAL 22mm (3-strip)

Main Product Features

- For nail down installation on joists
- Wear layer thickness approx. 3.5mm (can be re-sanded 3-4 times)


Surface Treatment



Logistics Information




Sustainability Tag



General Information



PROFESSIONAL 14

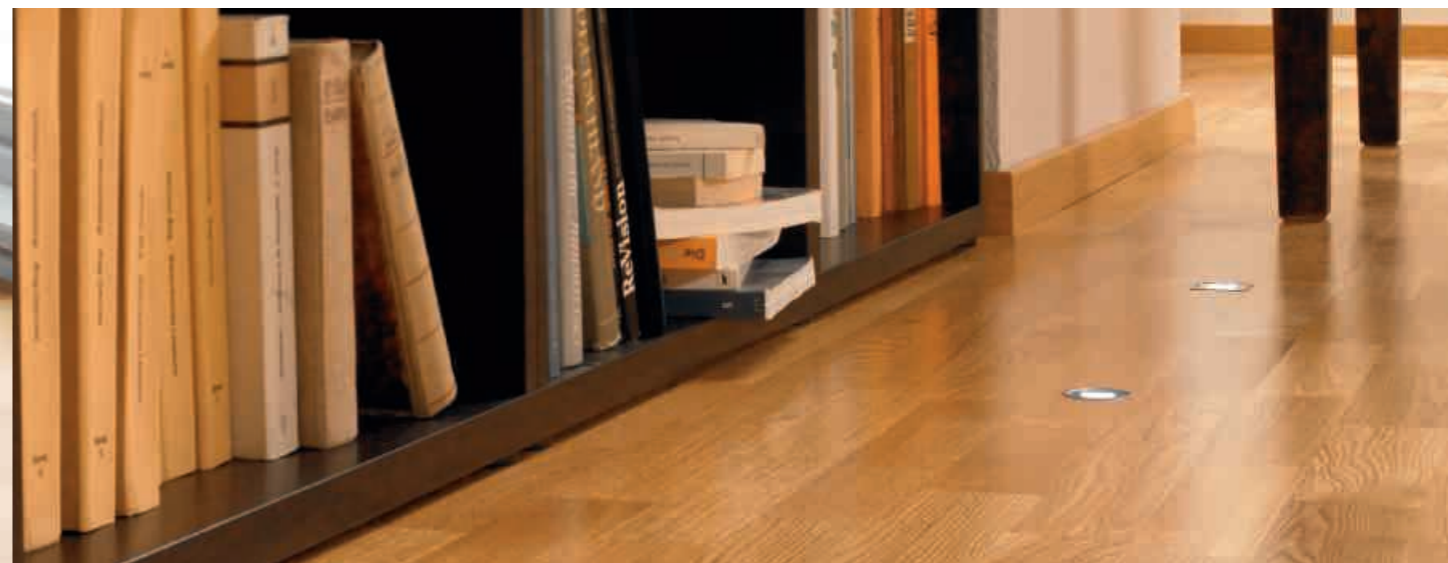

Professional 14 - Oak Nature

TECHNICAL DATA	STANDARDS	Professional 14
Characteristics		
Total thickness	EN 13489	14mm
Width	-	194mm
Length	-	2027mm
Wearlayer thickness	-	3.5mm
Weight	-	7.9kg/m ²
Technical performance		
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17\text{dB}$ with 2mm Tarkofoam/flex II
Emission of formaldehyde	EN 13986	E1
Reaction fo fire	EN 13501 -1	D _n -s1
Thermal insulation value board only		RT = 0.101m ² K/W
Thermal insulation value with ragfelt	EN ISO 10456:2007	RT = 0.121m ² K/W
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.141m ² K/W
Underfloor heating compatible		Maximum floor surface temperature 27°C with self-regulating under-floor heat system
Taber abraser/Lacquer's wear resistance*		
Proteco Lacquer	EN 13696	4000 revs
Proteco Natura	EN 13696	3500 revs

* Data show results with new components according to 2006 update. Method not applicable for stained, brushed or hardwax oiled products. Due to the nature of the material this table shows typical values. The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.



Oak Nature

● 8721 001

● 8721 002

PROFESSIONAL 14mm (3-strip)

Main Product Features

- Real wooden floors for special applications
- Three layer construction with excellent stability
- User friendly, glue-free locking system: 2-lock


Surface Treatment



Logistics Information



Sustainability Tag



General Information



PROFESSIONAL 13



Professional 13 - Oak Nature

TECHNICAL DATA	STANDARDS	Professional 13
Characteristics		
Total thickness	EN 13489	13mm
Width	-	194mm
Length	-	2027mm
Wearlayer thickness	-	2.5mm
Weight	-	7.3kg/m ²
Technical performance		
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17\text{dB}$ with 2mm Tarkofoam/flex II
Emission of formaldehyde	EN 13986	E1
Reaction fo fire	EN 13501-1	$D_{f1} < s1$
Thermal insulation value board only		$RT = 0.101\text{m}^2 \text{K/W}$
Thermal insulation value with ragfelt	EN ISO 10456:2007	$RT = 0.121\text{m}^2 \text{K/W}$
Thermal insulation value with 2mm Tarkofoam/flex II		$RT = 0.141\text{m}^2 \text{K/W}$
Underfloor heating compatible		
		Maximum floor surface temperature 27°C with self-regulating under-floor heat system
Taber abraser/Lacquer's wear resistance*		
Proteco Lacquer	EN 13696	4000 revs
Proteco Natura	EN 13696	3500 revs

* Data show results with new components according to 2006 update. Method not applicable for stained, brushed or hardwax oiled products. Due to the nature of the material this table shows typical values. The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.



Oak Nature

- 8722 001
- 8722 002

PROFESSIONAL 13mm (3-strip)

Main Product Features

- Real wooden floors for special applications
- Three layer construction with excellent stability
- User friendly, glue-free locking system: 2-lock


Surface Treatment



Logistics Information



Sustainability Tag



General Information



PROFESSIONAL 10




Professional 10 - Oak Nature

TECHNICAL DATA	STANDARDS	Professional 10
Characteristics		
Total thickness	EN 13489	10mm
Width	-	162mm
Length	-	1245mm
Wearlayer thickness	-	2.5mm
Weight	-	5.4kg/m ²
Technical performance		
Reduction of sound weighted index	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17\text{dB}$ with 2mm Tarkofoam/flex II
Emission of formaldehyde	EN 13986	E1
Reaction fo fire	EN 13501-1	$D_{f1} < s1$
Thermal insulation value board only		$RT = 0.079\text{m}^2 \text{K/W}$
Thermal insulation value with ragfelt	EN ISO 10456:2007	$RT = 0.099\text{m}^2 \text{K/W}$
Thermal insulation value with 2mm Tarkofoam/flex II		$RT = 0.119\text{m}^2 \text{K/W}$
Underfloor heating compatible		
		Maximum floor surface temperature 27°C with self-regulating under-floor heat system
Taber abraser/Lacquer's wear resistance*		
Proteco Lacquer	EN 13696	4000 revs
Proteco Natura	EN 13696	3500 revs

* Data show results with new components according to 2006 update. Method not applicable for stained, brushed or hardwax oiled products. Due to the nature of the material this table shows typical values. The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.



- 8725 006
- 8725 002
- 8725 003

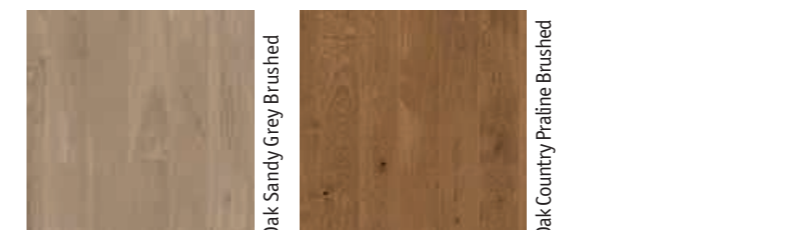

- 8725 004
- 8725 005

PROFESSIONAL 10mm (plank)

Main Product Features

- Made for renovation areas
- Recommended for glued down applications
- 2.5mm wear-layer (can be re-sanded 2-3 times)


Surface Treatment



Logistics Information



Sustainability Tag



General Information

