



VINYL HEAVY TRAFFIC

HOMOGENEOUS

iQ

iQ One	p. 84
iQ Natural	p. 90
iQ Megalit	p. 94
iQ Eminent	p. 98
iQ Granit	p. 102
iQ Optima	p. 110

Premium

Primo Premium	p. 120
Eclipse Premium	p. 124

Plus

Contract Plus	p. 132
Standard Plus	p. 136
Vylon Plus	p. 140

HETEROGENEOUS

Compact & Acoustic

Tapiflex & Acczent Evolution	p. 144
Tapiflex & Acczent Excellence	p. 156

Acoustic


Tapiflex Essential 50	p. 174
-----------------------	--------

Compact

Acczent Excellence 70	p. 182
Meteor 55	p. 198
Acczent Classic 40	p. 204



OUR SELECTION OF ACCESSORIES FOR VINYL HEAVY TRAFFIC

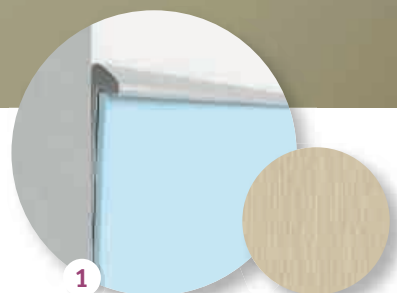

Abstract 26501 011

ProtectWALL

Protects the wall from impacts.

Cap

Provides a perfect finish and protects the edge of the wall covering.


See p. 558 for detailed info



Tactile guide

Specially designed for visually impaired people to help finding their way with blind stick.


See p. 555 for detailed info

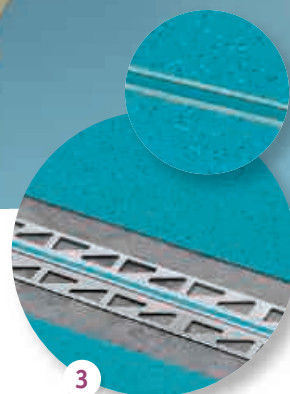

Expansion joint

Expansion joint sections offer a perfect solution to avoid tear or dish from screed.


See p. 539 for detailed info



Welding rod

Secures the junction between 2 rolls of flooring or wall and floor coverings.


See p. 538 for detailed info



Cove former

Improves hygiene inside wall corner and make maintenance easier.

See p. 540 for detailed info




Floorcraft

Selection of designs to be inserted into any floor area.

See p.566 for detailed info



OUR SELECTION OF ACCESSORIES FOR VINYL HEAVY TRAFFIC

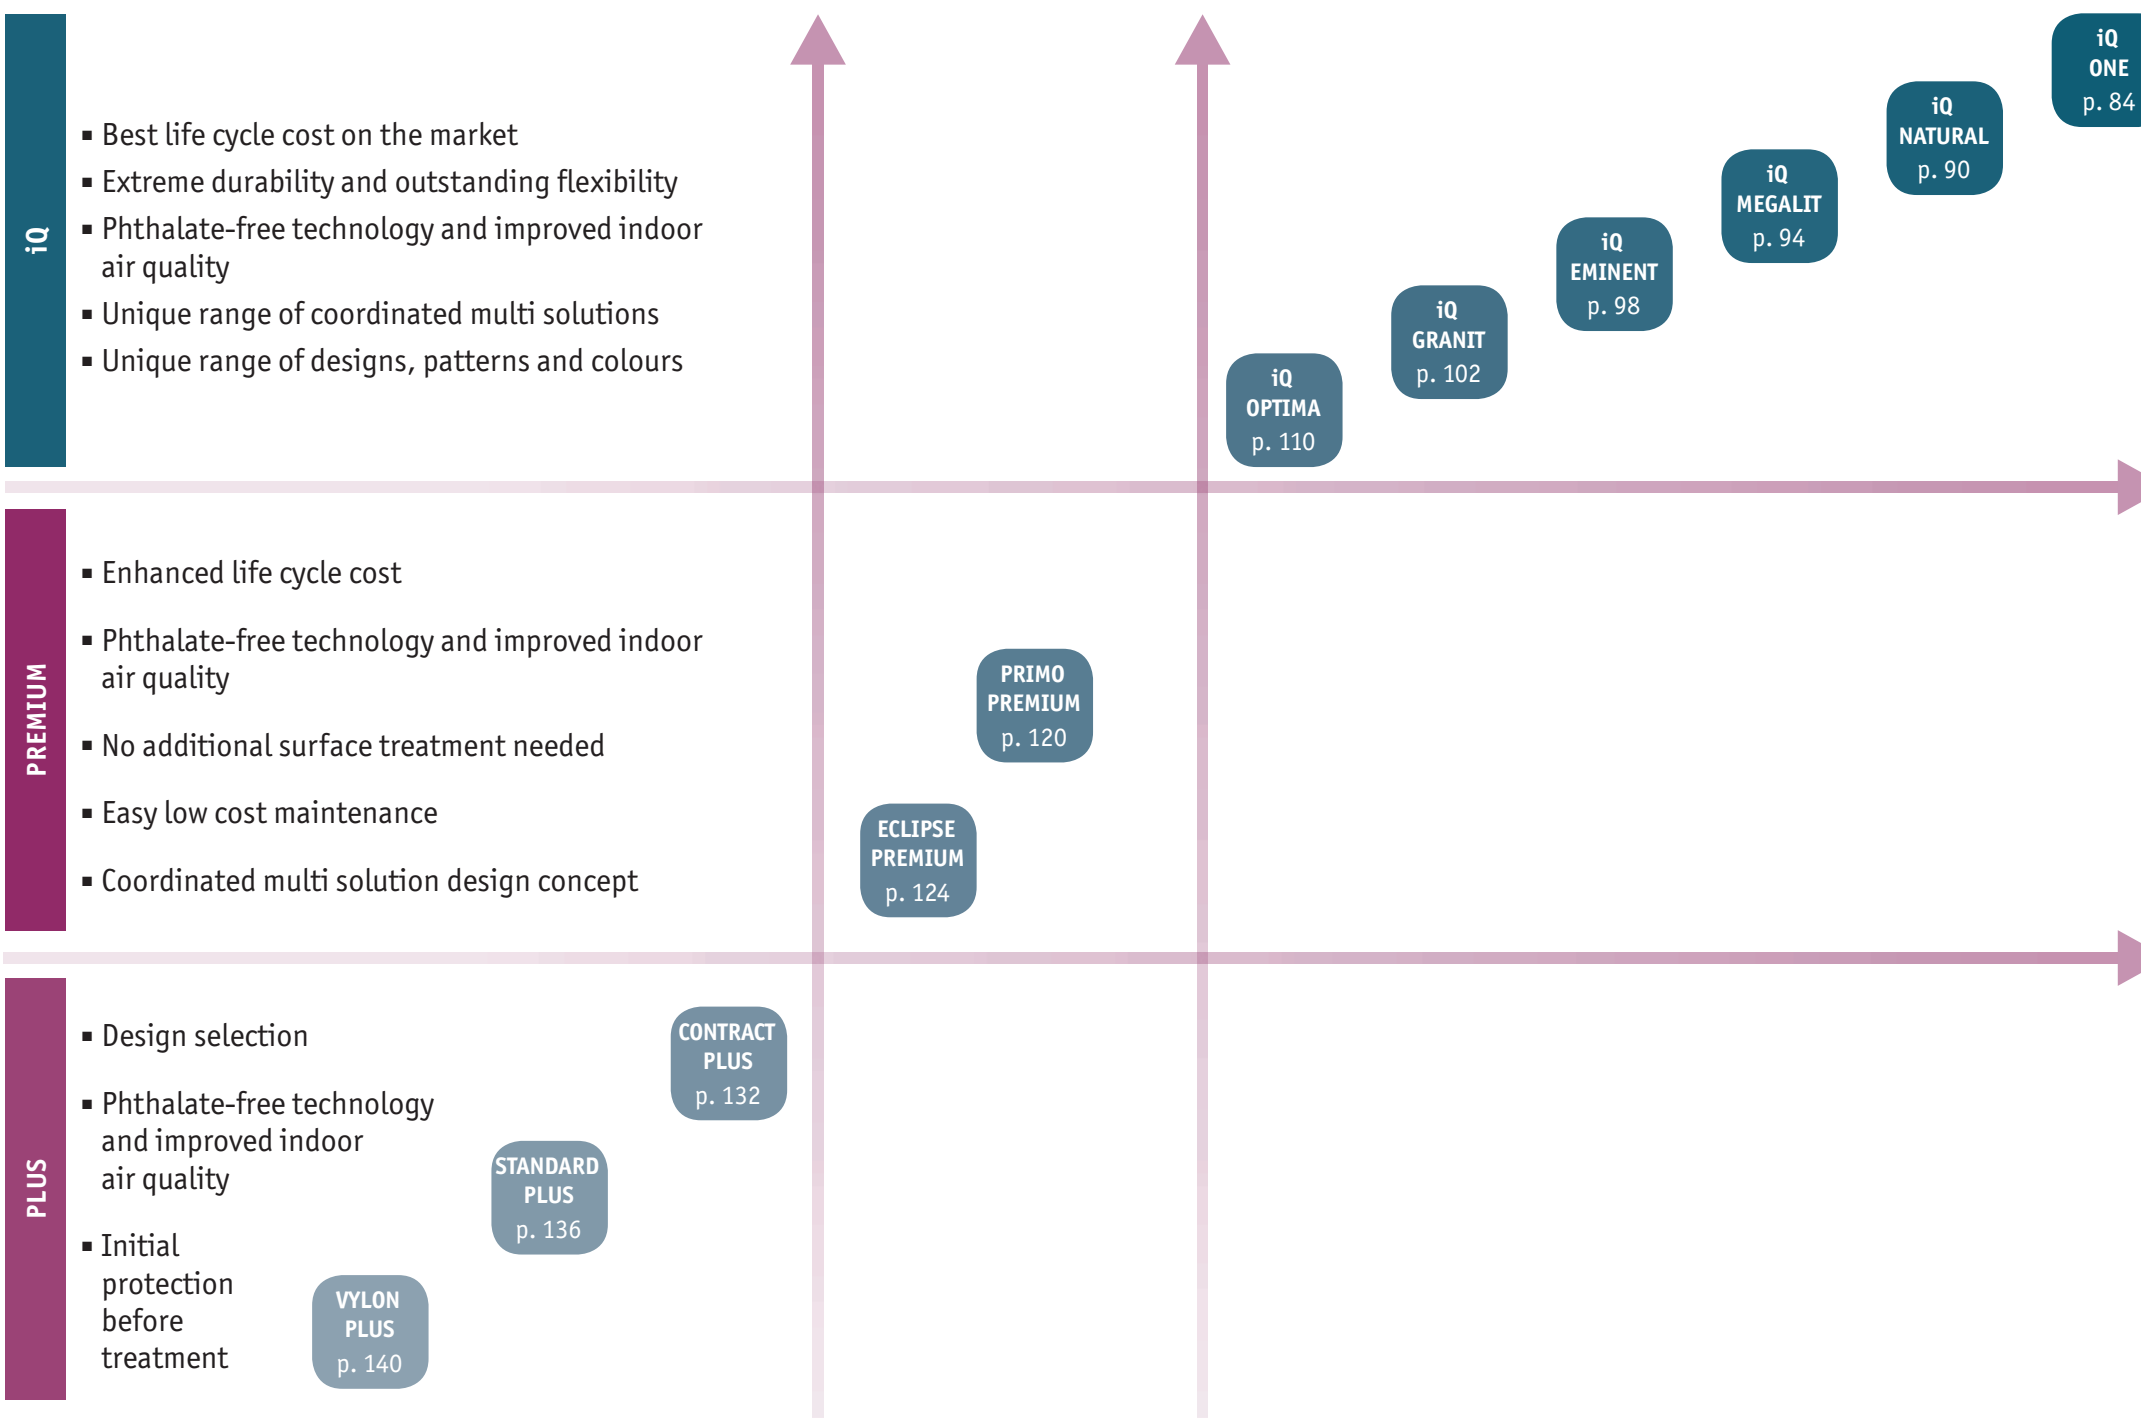

Phthalate-free	Yes			
Surface Treatment	Factory pre-treated	PUR treated	X-treme reinforcement	iQ technology
Unique surface restoration	-		Unlimited	
Bio plasticizer	-			Yes -
Non-PVC flooring	-			
Binder content	Type III	Type II		Type I -

THE iQ™ CONCEPT



Intelligent quality delivers superior performance and durability in flooring for education, healthcare, offices and public buildings.



SENSORY BENEFITS

- Versatile, classic designs
- Tried and tested product
- Available in sheets and tiles

FUNCTIONAL BENEFITS

- Durability and longevity for market-leading lifecycle cost-efficiency
- Practical, functional designs
- Hygienic and easy to clean

ENVIRONMENTAL BENEFITS

- Easily recyclable
- Extremely low VOC emissions
- Phthalate-free plasticizer
- Reduced use of detergents and water for cleaning and maintenance

iQ ONE

Homogeneous non-PVC thermoplastic flooring
Unique blend of thermoplastic polymers containing neither PVC or plasticizers

iQ NATURAL
iQ MEGALIT
iQ EMINENT
iQ GRANIT
iQ OPTIMA

Homogeneous vinyl flooring:
requires only dry buffing to regenerate its original appearance throughout lifetime

iQ GRANIT ACOUSTIC iQ OPTIMA ACOUSTIC

- 1 Homogeneous vinyl flooring:
requires only dry buffing to regenerate its original appearance throughout lifetime
- 2 Foam underlayer:
provides up to 17dB impact sound reduction and walking comfort

TECHNICAL DATA	STANDARDS	iQ One	iQ Natural	iQ Megalit	iQ Eminent	iQ Granit	iQ Optima	iQ Granit Acoustic	iQ Optima Acoustic
Classification									
Type of floorcovering	ISO 10581 - compact ISO 11638 - acoustic EN 14565	Homogeneous floor covering based upon synthetic thermoplastic polymers		Homogeneous vinyl flooring				Homogeneous vinyl flooring with foam interlayer	
Classification	ISO 10874 commercial industrial	Classes: 34 43						Classes: 33 42	Classes: 34 42
Characteristics									
Total thickness	ISO 24346 (EN 428)	2.00mm						4.00mm	3.70mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm						1.50mm	2.00mm
Total weight	ISO 23997 (EN 430)	2 800g/m²	2 500g/m²	2 800g/m²		2 700g/m²	3 810g/m²	3 500g/m²	
iQ PUR	-	Yes							
Binder content	ISO 10581 ISO 10582	—	Type I					Type II	
Technical performance									
Impact sound reduction	EN ISO 717/2	—	—					Approx. +15dB	Approx. +17dB
Acoustic improvement	NF 531-074	—	—					L _{n,e,w} <65dB Class A	L _{n,e,w} <65dB Class A
Residual indentation	Best measured value	0.02mm						0.12mm	≤ 0.20mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm						≤ 0.20mm	
Reaction to fire	EN ISO 9239-1 EN ISO 13501-1 EN ISO 11925-2	≥ 8 kW/m² B _{s1} s1 Pass							
Dimensional stability	ISO 23999 (EN 434)	—	≤ 0.40% for rolls ≤ 0.25% for tiles					≤ 0.40%	
	EN 14565 Annex C	≤ 0.20%	—					—	
Castor wheel test	ISO 4918 (EN 425)	Suitable							
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	—	—			 0575 *	—	—	—
Static electric charge	EN 1815	< 2kV						—	—
Light fastness	EN ISO 105-B02	≥ 6	≥ 7						
Chemical resistance	ISO 26987 (EN 423)	Excellent							
Fungi and bacteria resistance	ISO 846: Part C	Does not encourage growth							
Clean room test	ASTM F51/00	—	Class A					—	
	ISO 14644-1	—	ISO Class 4	-	ISO Class 4	ISO Class 4	ISO Class 4	—	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3							
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Suitable max. 27°C	Approx. 0.01m² K/W Suitable - max. 27°C					0.035m² K/W Suitable max. 27°C	Suitable max. 27°C
Form of delivery									
Form of delivery	ISO 24341 (EN 426) ISO 24342 (EN 427)	Approx. 23 running metres x 200cm	Rolls: 231m x 2m Tiles: 61 x 61cm		Rolls: 231m x 2m Tiles: 61 x 61 cm	Rolls: 251m x 2m Tiles: 61 x 61cm	Rolls: 251m x 2m Tiles: 61 x 61cm	Rolls: approx. 231m x 2m	Approx. 251m x 195cm
Colours	—	38	35	24	34	49 + 1 Multicolour** + 12 iQ Granit Micro	Original: 48 Mono: 10 Essence: 6	20	12

*Colour 431 is not approved for use under the IMO directive.

**iQ Granit Multicolour is not approved for use under the IMO directive.

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

iQ ONE



iQ One - 21200 116 - 21200 555 - 21200 598

Classic Colors



Green

21200 238



Yellow

21200 239



Red

21200 368



Light Green

21200 599



Light Blue

21200 397



Blue

21200 398



Dark Blue

21200 399



Purple

21200 396



Black

21200 114



Orange

21200 240

TECHNICAL DATA	STANDARDS	iQ One
Classification		
Type of floorcovering	EN 14565	Homogeneous floor covering based upon synthetic thermoplastic polymers
Classification	ISO 10874 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	2 800g/m ²
iQ PUR	-	Yes
Technical performance		
Impact sound reduction	EN ISO 717/2	—
Acoustic improvement	NF S31-074	—
Wet room approval	EN 13553 Annex A GBR approval system	Watertight Certified
Residual indentation	Best measured value	0.02mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN ISO 9239-1 EN ISO 13501-1 EN ISO 11925-2	≥ 8 kW/m ² B _f s1 Pass
Dimensional stability	ISO 23999 (EN 434)	≤ 0.20%
Castor wheel test	ISO 4918 (EN 425)	Suitable
Flexibility	ISO 24344 – EN 435	Pass
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	ISO 26987 (EN 423)	Excellent
Fungi and bacteria resistance	ISO 846: Part C	Does not encourage growth
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

iQ ONE Classic Colors

Main Product Features

- New plasticizer based on renewable resources
- iQ Unique Surface Restoration system
- Extreme durability and outstanding flexibility
- Lowest life cycle cost on the market

Surface Treatment



Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 23lm

Laying direction:



General Information






iQ One - 21200 116 - 21200 598



Classic Neutrals

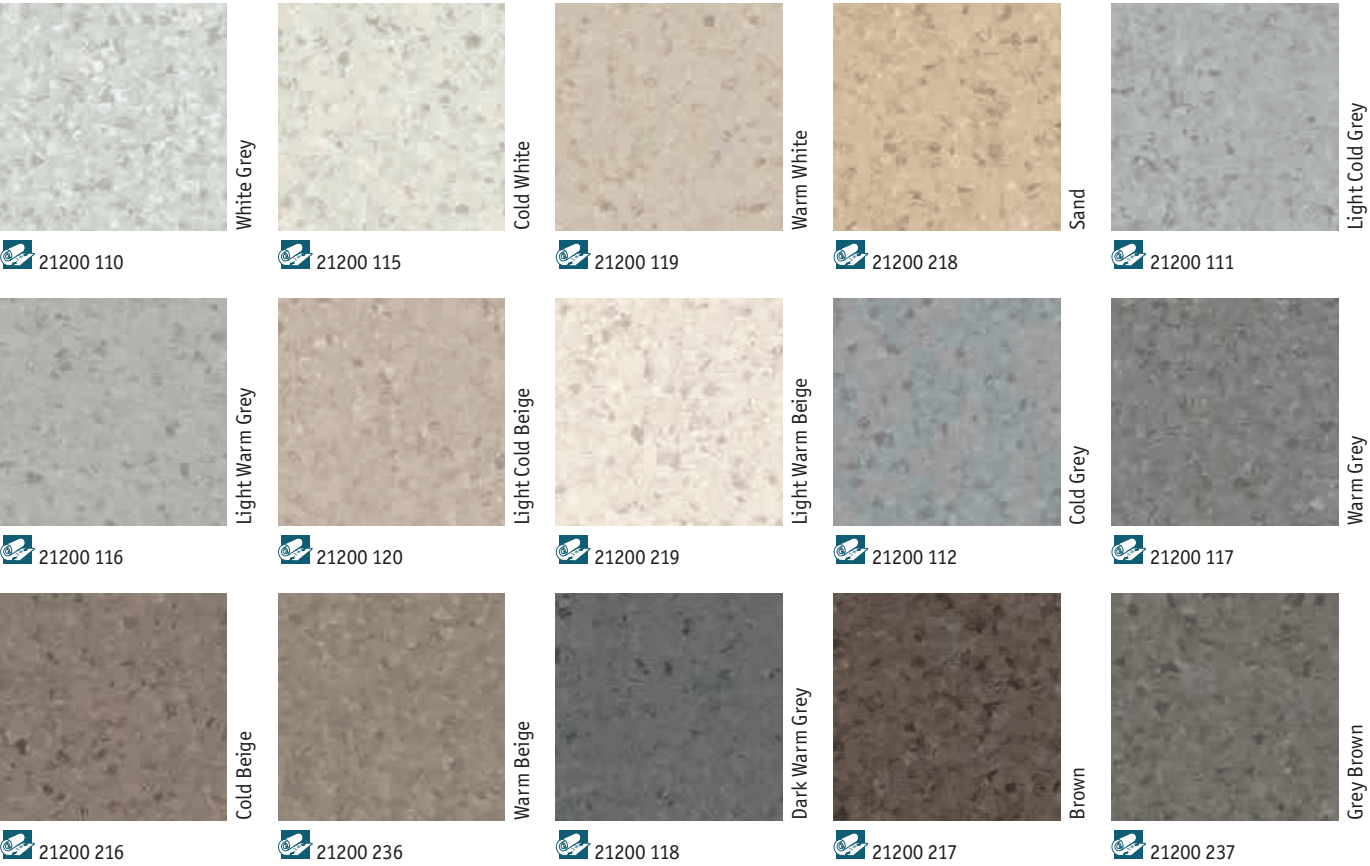

TECHNICAL DATA	STANDARDS	iQ One
Classification		
Type of floorcovering	EN 14565	Homogeneous floor covering based upon synthetic thermoplastic polymers
Classification	ISO 10874 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	2 800g/m²
iQ PUR	-	Yes
Technical performance		
Impact sound reduction	EN ISO 717/2	—
Acoustic improvement	NF S31-074	—
Wet room approval	EN 13553 Annex A GBR approval system	Watertight Certified
Residual indentation	Best measured value	0.02mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN ISO 9239-1 EN ISO 13501-1 EN ISO 11925-2	≥ 8 kW/m² B _f s1 Pass
Dimensional stability	EN 14565 Annex C	≤ 0.20%
Castor wheel test	ISO 4918 (EN 425)	Suitable
Flexibility	ISO 24344 – EN 435	Pass
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	ISO 26987 (EN 423)	Excellent
Fungi and bacteria resistance	ISO 846: Part C	Does not encourage growth
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.



iQ ONE Classic Neutrals

Main Product Features

- New plasticizer based on renewable resources
- iQ Unique Surface Restoration system
- Extreme durability and outstanding flexibility
- Lowest life cycle cost on the market

Surface Treatment



Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 231m

Laying direction:



General Information



iQ ONE



iQ One - 21200 363 - 21200 558




Dusty




Dusty Sand

21200 558



Dusty Green

21200 559




Dusty Orange

21200 557



Dusty Brown

21200 556



Dusty Grey

21200 555

Misty



Misty Light Sand

21200 365



Misty Green

21200 366



Misty Light Grey

21200 362




Misty Blue

21200 367



Misty Beige

21200 364




Misty Grey

21200 363

TECHNICAL DATA	STANDARDS	iQ One
Classification		
Type of floorcovering	EN 14565	Homogeneous floor covering based upon synthetic thermoplastic polymers
Classification	ISO 10874 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	2 800g/m ²
iQ PUR	-	Yes
Technical performance		
Impact sound reduction	EN ISO 717/2	—
Acoustic improvement	NF S31-074	—
Wet room approval	EN 13553 Annex A GBR approval system	Watertight Certified
Residual indentation	Best measured value	0.02mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN ISO 9239-1 EN ISO 13501-1 EN ISO 11925-2	≥ 8 kW/m ² B _f s1 Pass
Dimensional stability	EN 14565 Annex C	≤ 0.20%
Castor wheel test	ISO 4918 (EN 425)	Suitable
Flexibility	ISO 24344 – EN 435	Pass
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	ISO 26987 (EN 423)	Excellent
Fungi and bacteria resistance	ISO 846: Part C	Does not encourage growth
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

Dusty

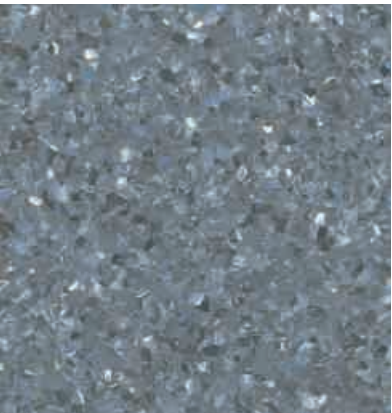

Dusty Blue

21200 598

iQ ONE Dusty & Misty

Main Product Features

- New plasticizer based on renewable resources
- iQ Unique Surface Restoration system
- Extreme durability and outstanding flexibility
- Lowest life cycle cost on the market

Surface Treatment



Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 231m

Laying direction:




General Information




iQ NATURAL




iQ Natural - 3009 277



3009 276
3010 276



3009 282
3010 282



3009 283
3010 283



3009 287
3010 287



3009 286
3010 286




3009 284
3010 284



3009 285
3010 285



3009 281
3010 281



3009 277
3010 277



3009 278
3010 278



3009 279
3010 279




3009 288
3010 288



3009 289
3010 289



3009 290
3010 290



3009 291
3010 291

TECHNICAL DATA	STANDARDS	iQ Natural
Classification		
Type of floorcovering	ISO 10581	Homogeneous vinyl flooring
Classification	ISO 10581 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	2 800g/m ²
iQ PUR	-	Yes
Binder content	ISO 10581	Type I
Technical performance		
Impact sound reduction	EN ISO 717/2	—
Acoustic improvement	NF S31-074	—
Residual indentation	Best measured value	0.02mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN ISO 9239-1	≥ 8 kW/m ²
	EN ISO 13501-1	B _s s1
Dimensional stability	EN ISO 11925-2	Pass
	EN 14565 Annex C	≤ 0.40% for rolls ≤ 0.25% for tiles
Castor wheel test	ISO 4918 (EN 425)	Suitable
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	—
Static electric charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ 7
Chemical resistance	ISO 26987 (EN 423)	Excellent
Fungi and bacteria resistance	ISO 846: Part C	Does not encourage growth
Clean room test	ASTM F51/00 ISO 14644-1	Class A ISO Class 4
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.



3009 292
3010 292



3009 293
3010 293



3009 294
3010 294



3009 280
3010 280

iQ NATURAL


Main Product Features

- New plasticizer based on renewable resources
- iQ Unique Surface Restoration system
- Extreme durability and outstanding flexibility
- Lowest life cycle cost on the market

Surface Treatment



Sustainability Tag

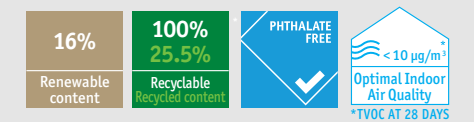

Logistics Information

Available in rolls
Rolls length: 231m

Laying direction:
↑↓

Available in tiles
61

Laying direction:
↑↑↑↑
↑↑↑↑


General Information




iQ NATURAL



iQ Natural - 3009 272



3009 271
3010 271



3009 177
3010 177




3009 272
3010 272



3009 172
3010 172



3009 174
3010 174



3009 178
0010 178



3009 273
3010 273



3009 173
3010 173




3009 175
3010 175



3009 179
3010 179



3009 170
0010 170



3009 274
3010 274



3009 180
3010 180




3009 171
3010 171



3009 275
3010 275

TECHNICAL DATA	STANDARDS	iQ Natural
Classification		
Type of floorcovering	ISO 10581	Homogeneous vinyl flooring
Classification	ISO 10581 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	2 800g/m ²
iQ PUR	-	Yes
Binder content	ISO 10581	Type I
Technical performance		
Impact sound reduction	EN ISO 717/2	—
Acoustic improvement	NF S31-074	—
Residual indentation	Best measured value	0.02mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN ISO 9239-1 EN ISO 13501-1 EN ISO 11925-2	≥ 8 kW/m ² B _f s1 Pass
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40% for rolls ≤ 0.25% for tiles
Castor wheel test	ISO 4918 (EN 425)	Suitable
Marine equipment	IMO FTFC Part 5 and 2 IMO Res. A653	—
Static electric charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ 7
Chemical resistance	ISO 26987 (EN 423)	Excellent
Fungi and bacteria resistance	ISO 846: Part C	Does not encourage growth
Clean room test	ASTM F51/00 ISO 14644-1	Class A ISO Class 4
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

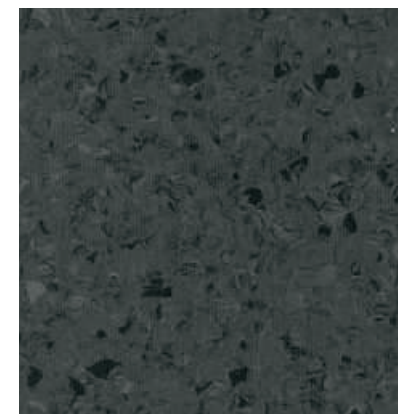

3009 176
3010 176

iQ NATURAL

Main Product Features

- New plasticizer based on renewable resources
- iQ Unique Surface Restoration system
- Extreme durability and outstanding flexibility
- Lowest life cycle cost on the market

Surface Treatment



Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 231m

Laying direction:

Available in tiles

Laying direction:

General Information



iQ MEGALIT



iQ Megalit - 3390 523



3390 501
3396 501



3390 502
3396 502



3390 503
3396 503



3390 504
3396 504



3390 505
3396 505



3390 508
3396 508




3390 506
3396 506



3390 509
3396 509



3390 510
3396 510



3390 523
3396 523



3390 507
3396 507

TECHNICAL DATA	STANDARDS	iQ Megalit
Classification		
Type of floorcovering	ISO 10581	Homogeneous vinyl flooring
Classification	ISO 10581 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	2 500g/m ²
iQ PUR	-	Yes
Binder content	ISO 10581	Type I
Technical performance		
Impact sound reduction	EN ISO 717/2	—
Acoustic improvement	NF S31-074	—
Residual indentation	Best measured value	0.02mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN ISO 9239-1	≥ 8 kW/m ²
	EN ISO 13501-1 EN ISO 11925-2	B _f s1 Pass
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40% for rolls ≤ 0.25% for tiles
Castor wheel test	ISO 4918 (EN 425)	Suitable
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	—
Static electric charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ 7
Chemical resistance	ISO 26987 (EN 423)	Excellent
Fungi and bacteria resistance	ISO 846: Part C	Does not encourage growth
Clean room test	ASTM F51/00	Class A
	ISO 14644-1	-
Slip resistance	DIN 51130	R9
	EN 13893	≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

iQ MEGALIT

Main Product Features

- Extraordinary depth of pattern
- iQ Unique Surface Restoration system
- Extreme durability and outstanding flexibility
- Lowest life cycle cost on the market

Surface Treatment



Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 231m

Laying direction:

Available in tiles

Laying direction:

General Information




iQ MEGALIT



iQ Megalit - 3390 509, 3390 516



3390 511
3396 511



3390 512
3396 512



3390 513
3396 513



3390 514
3396 514



3390 515
3396 515



3390 516
3396 516




3390 517
3396 517



3390 518
3396 518



3390 524
3396 524



3390 520
3396 520

TECHNICAL DATA	STANDARDS	iQ Megalit
Classification		
Type of floorcovering	ISO 10581	Homogeneous vinyl flooring
Classification	ISO 10581 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	2 500g/m ²
iQ PUR	-	Yes
Binder content	ISO 10581	Type I
Technical performance		
Impact sound reduction	EN ISO 717/2	—
Acoustic improvement	NF S31-074	—
Residual indentation	Best measured value	0.02mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN ISO 9239-1	≥ 8 kW/m ²
	EN ISO 13501-1 EN ISO 11925-2	B _{s1} Pass
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40% for rolls ≤ 0.25% for tiles
Castor wheel test	ISO 4918 (EN 425)	Suitable
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	—
Static electric charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ 7
Chemical resistance	ISO 26987 (EN 423)	Excellent
Fungi and bacteria resistance	ISO 846: Part C	Does not encourage growth
Clean room test	ASTM F51/00	Class A
	ISO 14644-1	—
Slip resistance	DIN 51130	R9
	EN 13893	≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

iQ MEGALIT

Main Product Features

- Extraordinary depth of pattern
- iQ Unique Surface Restoration system
- Extreme durability and outstanding flexibility
- Lowest life cycle cost on the market

Surface Treatment



Sustainability Tag



Logistics Information


Available in rolls
Rolls length: 231m

Laying direction:

Available in tiles

Laying direction:

General Information



iQ EMINENT



iQ Eminent - 2103 0128, 2103 0149



Neutrals




2103 0125
2103 1125




2103 0126
2103 1126




2103 0127
2103 1127



2103 0128
2103 1128




2103 0129
2103 1129



2103 0130
2103 1130



2103 0131
2103 1131




2103 0132
2103 1132




2103 0133
2103 1133



2103 0134
2103 1134



2103 0135
2103 1135



2103 0136
2103 1136



2103 0137
2103 1137




2103 0138
2103 1138



2103 0139
2103 1139

TECHNICAL DATA	STANDARDS	iQ Eminent
Classification		
Type of floorcovering	ISO 10581	Homogeneous vinyl flooring
Classification	ISO 10581 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	2 800g/m ²
iQ PUR	-	Yes
Binder content	ISO 10581	Type I
Technical performance		
Impact sound reduction	EN ISO 717/2	—
Acoustic improvement	NF S31-074	—
Residual indentation	Best measured value	0.02mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN ISO 9239-1	≥ 8 kW/m ²
	EN ISO 13501-1	B _f s1
		Pass
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40% for rolls ≤ 0.25% for tiles
Castor wheel test	ISO 4918 (EN 425)	Suitable
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	—
Static electric charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ 7
Chemical resistance	ISO 26987 (EN 423)	Excellent
Fungi and bacteria resistance	ISO 846: Part C	Does not encourage growth
Clean room test	ASTM F51/00 ISO 14644-1	Class A Iso Class 4
Slip resistance	DIN 51130	R9
	EN 13893	≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C


The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.



2103 0140
2103 1140



2103 0141
2103 1141

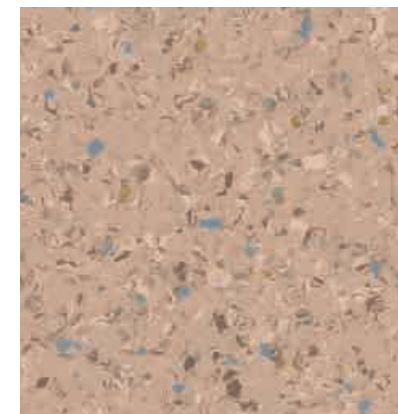

2103 0142
2103 1142

iQ EMINENT Neutrals

Main Product Features

- High performance non-directional design with 3D effect
- iQ Unique Surface Restoration system
- Extreme durability and outstanding flexibility
- Lowest life cycle cost on the market

Surface Treatment



Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 231m

Laying direction:

Available in tiles

Laying direction:

General Information




iQ EMINENT




iQ Eminent - 2103 0128, 2103 0151, 2103 0149


Colours




2103 0143
2103 1143




2103 0144
2103 1144



2103 0145
2103 1145



2103 0146
2103 1146



2103 0147
2103 1147




2103 0148
2103 1148




2103 0150
2103 1150



2103 0151
2103 1151



2103 0152
2103 1152



2103 0149
2103 1149


Unisense



2103 0153
2103 1153




2103 0154
2103 1154



2103 0155
2103 1155



2103 0156
2103 1156



2103 0157
2103 1157

TECHNICAL DATA	STANDARDS	iQ Eminent
Classification		
Type of floorcovering	ISO 10581	Homogeneous vinyl flooring
Classification	ISO 10581 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	2 800g/m ²
iQ PUR	-	Yes
Binder content	ISO 10581	Type I
Technical performance		
Impact sound reduction	EN ISO 717/2	—
Acoustic improvement	NF S31-074	—
Residual indentation	Best measured value	0.02mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN ISO 9239-1	≥ 8 kW/m ²
	EN ISO 13501-1	B _f s1
		Pass
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40% for rolls ≤ 0.25% for tiles
Castor wheel test	ISO 4918 (EN 425)	Suitable
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	—
Static electric charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ 7
Chemical resistance	ISO 26987 (EN 423)	Excellent
Fungi and bacteria resistance	ISO 846: Part C	Does not encourage growth
Clean room test	ASTM F51/00	Class A
	ISO 14644-1	Iso Class 4
Slip resistance	DIN 51130	R9
	EN 13893	≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.



2103 0158
2103 1158

iQ EMINENT Colours / Unisense

Main Product Features

- High performance non-directional design with 3D effect
- iQ Unique Surface Restoration system
- Extreme durability and outstanding flexibility
- Lowest life cycle cost on the market

Surface Treatment



Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 231m

Laying direction:

Available in tiles

Laying direction:

General Information



iQ GRANIT



iQ Granit - 3040 446 - 3040 447 - 3040 451

Neutrals




3040 782
3243 782




3040 382
3221 382
3243 382



3040 383
3221 383
3243 383



3040 435
3243 435



3040 384
3243 384



3040 445
3243 445



3040 446
3243 446



3040 447
3221 447
3243 447




3040 404
3221 404
3243 404



3040 460
3243 460



3040 461
3221 461
3243 461



3040 462
3221 462
3243 462



3040 463
3221 463
3243 463



3040 419
3243 419



3040 434
3243 434




TECHNICAL DATA	STANDARDS	iQ Granit	iQ Granit Acoustic
Classification			
Type of floorcovering	ISO 10581 - compact ISO 11638 - acoustic	Homogeneous vinyl flooring	Homogeneous vinyl flooring with foam interlayer
Classification	ISO 10581 commercial industrial	Classes: 34 43	Classes: 33 42
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.00mm	4.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	1.50mm
Total weight	ISO 23997 (EN 430)	2 800g/m ²	3 810g/m ²
iQ PUR	-	Yes	
Binder content	ISO 10581 - compact ISO 10582 - acoustic	Type I —	— Type II
Technical performance			
Impact sound reduction	EN ISO 717/2	—	Approx. +15dB
Acoustic improvement	NF S31-074	—	L _{n,e,w} < 65dB Class A
Residual indentation	Best measured value	0.02mm	0.12mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	≤ 0.20mm
Reaction to fire	EN ISO 9239-1 EN ISO 13501-1 EN ISO 11925-2	≥ 8 kW/m ² B _{s1} s1 Pass	
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40% for rolls ≤ 0.25% for tiles	≤ 0,40%
Castor wheel test	ISO 4918 (EN 425)	Suitable	
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	0575 *	
Static electric charge	EN 1815	< 2kV	
Light fastness	EN ISO 105-B02	≥ 7	
Chemical resistance	ISO 26987 (EN 423)	Excellent	
Fungi and bacteria resistance	ISO 846: Part C	Does not encourage growth	
Clean room test	ASTM F51/00 ISO 14644-1	Class A Class 4	— —
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C	0.035m ² K/W Suitable - max. 27°C

*Colour 431 is not approved for use under the IMO directive.

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.



3040 420
3243 420

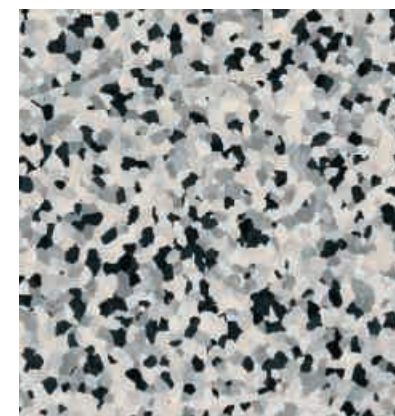

3218 431
3044 431

iQ GRANIT Neutrals

Main Product Features

- Unique range of multi solutions, coordinated with: iQ Toro SC, iQ Granit SD, Granit Safe.T and Granit Multisafe
- iQ Unique Surface Restoration system
- Extreme durability and outstanding flexibility
- Lowest life cycle cost on the market
- iQ Granit Acoustic 15dB available




Surface Treatment




Sustainability Tag



Logistics Information



General Information

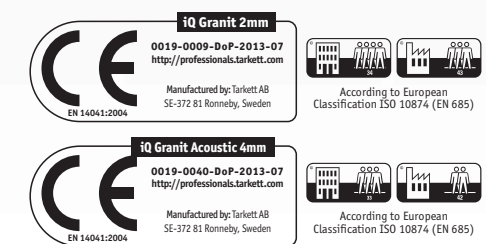


iQ GRANIT



iQ Granit - 3040 449

Neutrals



 3040 453
 3243 453



 3040 770
 3221 770
 3243 770



 3040 421
 3221 421
 3243 421



 3040 449
 3221 449
 3243 449



 3040 414
 3243 414



 3040 415
 3243 415



 3040 428
 3243 428



 3040 372
 3221 372
 3243 372



 3040 410
 3243 410




 3040 409
 3243 409

Colours



 3040 375
 3221 375
 3243 375



 3040 416
 3221 416
 3243 416



 3040 751
 3243 751



 3040 772
 3221 772
 3243 772



 3040 417
 3243 417

TECHNICAL DATA	STANDARDS	iQ Granit	iQ Granit Acoustic
Classification			
Type of floorcovering	ISO 10581 - compact ISO 11638 - acoustic	Homogeneous vinyl flooring	Homogeneous vinyl flooring with foam interlayer
Classification	ISO 10581 commercial industrial	Classes: 34 43	Classes: 33 42
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.00mm	4.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	1.50mm
Total weight	ISO 23997 (EN 430)	2 800g/m ²	3 810g/m ²
iQ PUR	-	Yes	
Binder content	ISO 10581 - compact ISO 10582 - acoustic	Type I —	— Type II
Technical performance			
Impact sound reduction	EN ISO 717/2	—	Approx. +15dB
Acoustic improvement	NF S31-074	—	L _{n,e,w} <65dB Class A
Residual indentation	Best measured value	0.02mm	0.12mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	≤ 0.20mm
Reaction to fire	EN ISO 9239-1 EN ISO 13501-1 EN ISO 11925-2	≥ 8 kW/m ² B _{s1} s1 Pass	
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40% for rolls ≤ 0.25% for tiles	≤ 0,40%
Castor wheel test	ISO 4918 (EN 425)	Suitable	
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	 0575 *	
Static electric charge	EN 1815	< 2kV	
Light fastness	EN ISO 105-B02	≥ 7	
Chemical resistance	ISO 26987 (EN 423)	Excellent	
Fungi and bacteria resistance	ISO 846: Part C	Does not encourage growth	
Clean room test	ASTM F51/00 ISO 14644-1	Class A Class 4	— —
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C	0.035m ² K/W Suitable - max. 27°C

*Colour 431 is not approved for use under the IMO directive.

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

Colours



 3040 423
 3243 423



 3040 418
 3243 418

iQ GRANIT Neutrals / Colours

Main Product Features

- Unique range of multi solutions, coordinated with: iQ Toro SC, iQ Granit SD, Granit SafeT. and Granit Multisafe
- iQ Unique Surface Restoration system
- Extreme durability and outstanding flexibility
- Lowest life cycle cost on the market
- iQ Granit Acoustic 15dB available



Surface Treatment




Sustainability Tag



Logistics Information



General Information

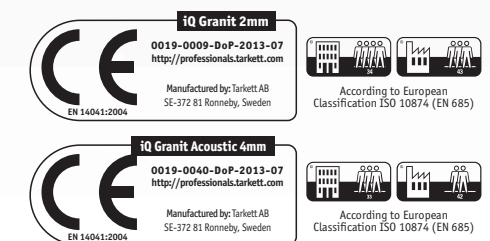


iQ GRANIT



iQ Granit - 3040 450 - 3040 777


Colours

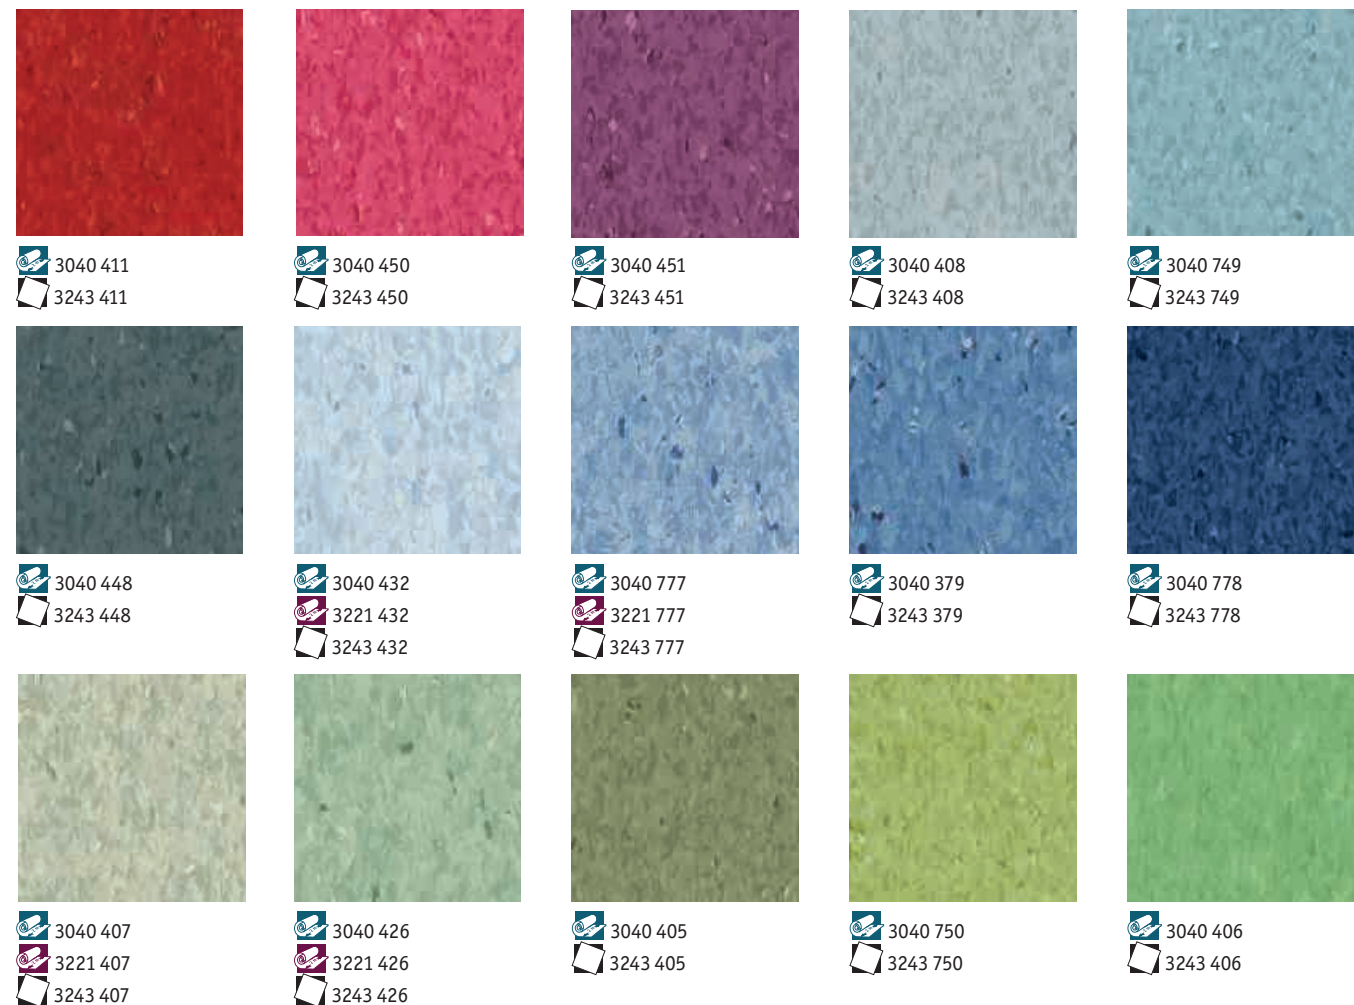

TECHNICAL DATA	STANDARDS	iQ Granit	iQ Granit Acoustic
Classification			
Type of floorcovering	ISO 10581 - compact ISO 11638 - acoustic	Homogeneous vinyl flooring	Homogeneous vinyl flooring with foam interlayer
Classification	ISO 10581 commercial industrial	Classes: 34 43	Classes: 33 42
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.00mm	4.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	1.50mm
Total weight	ISO 23997 (EN 430)	2 800g/m ²	3 810g/m ²
iQ PUR	-	Yes	
Binder content	ISO 10581 - compact ISO 10582 - acoustic	Type I —	— Type II
Technical performance			
Impact sound reduction	EN ISO 717/2	—	Approx. +15dB
Acoustic improvement	NF S31-074	—	L _{n,e,w} < 65dB Class A
Residual indentation	Best measured value	0.02mm	0.12mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	≤ 0.20mm
Reaction to fire	EN ISO 9239-1 EN ISO 13501-1 EN ISO 11925-2	≥ 8 kW/m ² B _{s1} s1 Pass	
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40% for rolls ≤ 0.25% for tiles	≤ 0,40%
Castor wheel test	ISO 4918 (EN 425)	Suitable	
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	 0575 *	
Static electric charge	EN 1815	< 2kV	
Light fastness	EN ISO 105-B02	≥ 7	
Chemical resistance	ISO 26987 (EN 423)	Excellent	
Fungi and bacteria resistance	ISO 846: Part C	Does not encourage growth	
Clean room test	ASTM F51/00 ISO 14644-1	Class A Class 4	— —
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C	0.035m ² K/W Suitable - max. 27°C

*Colour 431 is not approved for use under the IMO directive.

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

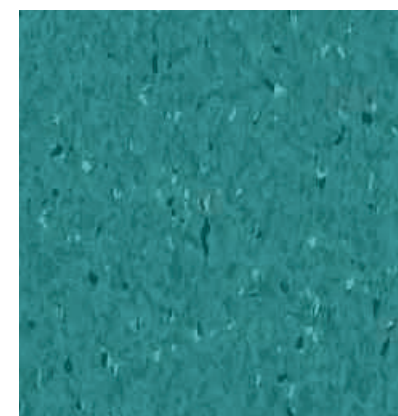

3040 464
3243 464

iQ GRANIT Colours

Main Product Features

- Unique range of multi solutions, coordinated with: iQ Toro SC, iQ Granit SD, Granit Safe.T and Granit Multisafe
- iQ Unique Surface Restoration system
- Extreme durability and outstanding flexibility
- Lowest life cycle cost on the market
- iQ Granit Acoustic 15dB available



Surface Treatment




Sustainability Tag



Logistics Information



General Information

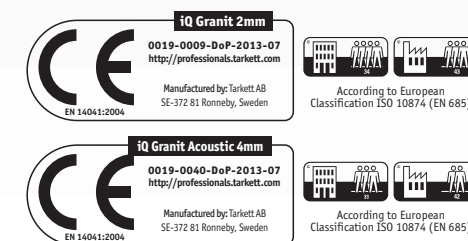

iQ GRANIT



iQ Granit - 3040 382 - 3040 383


Micro



TECHNICAL DATA	STANDARDS	iQ Granit
Classification		
Type of floorcovering	ISO 10581	Homogeneous vinyl flooring
Classification	ISO 10581 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	2 800g/m ²
iQ PUR	-	Yes
Binder content	ISO 10581	Type I
Technical performance		
Impact sound reduction	EN ISO 717/2	—
Acoustic improvement	NF 531-074	—
Residual indentation	Best measured value ISO 24343-1 (EN 433) requirement	0.02mm ≤ 0.10mm
Reaction to fire	EN ISO 9239-1 EN ISO 13501-1 EN ISO 11925-2	≥ 8 kW/m ² B _s s1 Pass
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40% for rolls ≤ 0.25% for tiles
Castor wheel test	ISO 4918 (EN 425)	Suitable
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	0575 *
Static electric charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ 7
Chemical resistance	ISO 26987 (EN 423)	Excellent
Fungi and bacteria resistance	ISO 846: Part C	Does not encourage growth
Clean room test	ASTM F51/00 ISO 14644-1	Class A Class 4
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C

* Colour 431 is not approved for use under the IMO directive.

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

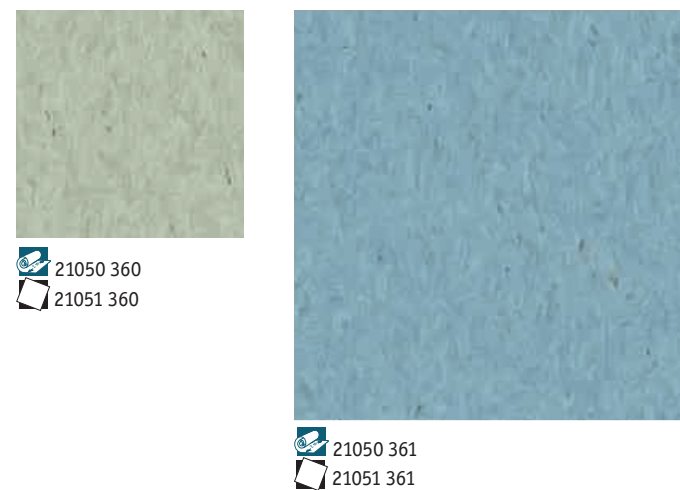

iQ GRANIT Micro

Main Product Features

- Low-contrasted pattern references
- iQ Unique Surface Restoration system
- Extreme durability and outstanding flexibility
- Lowest life cycle cost on the market
- Coordinated with: iQ Toro SC, iQ Granit SD, Granit SafeT. and Granit Multisafe

Surface Treatment



Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 251m

Laying direction:

Available in tiles

Laying direction:


General Information



iQ OPTIMA




iQ Optima - 3242 849

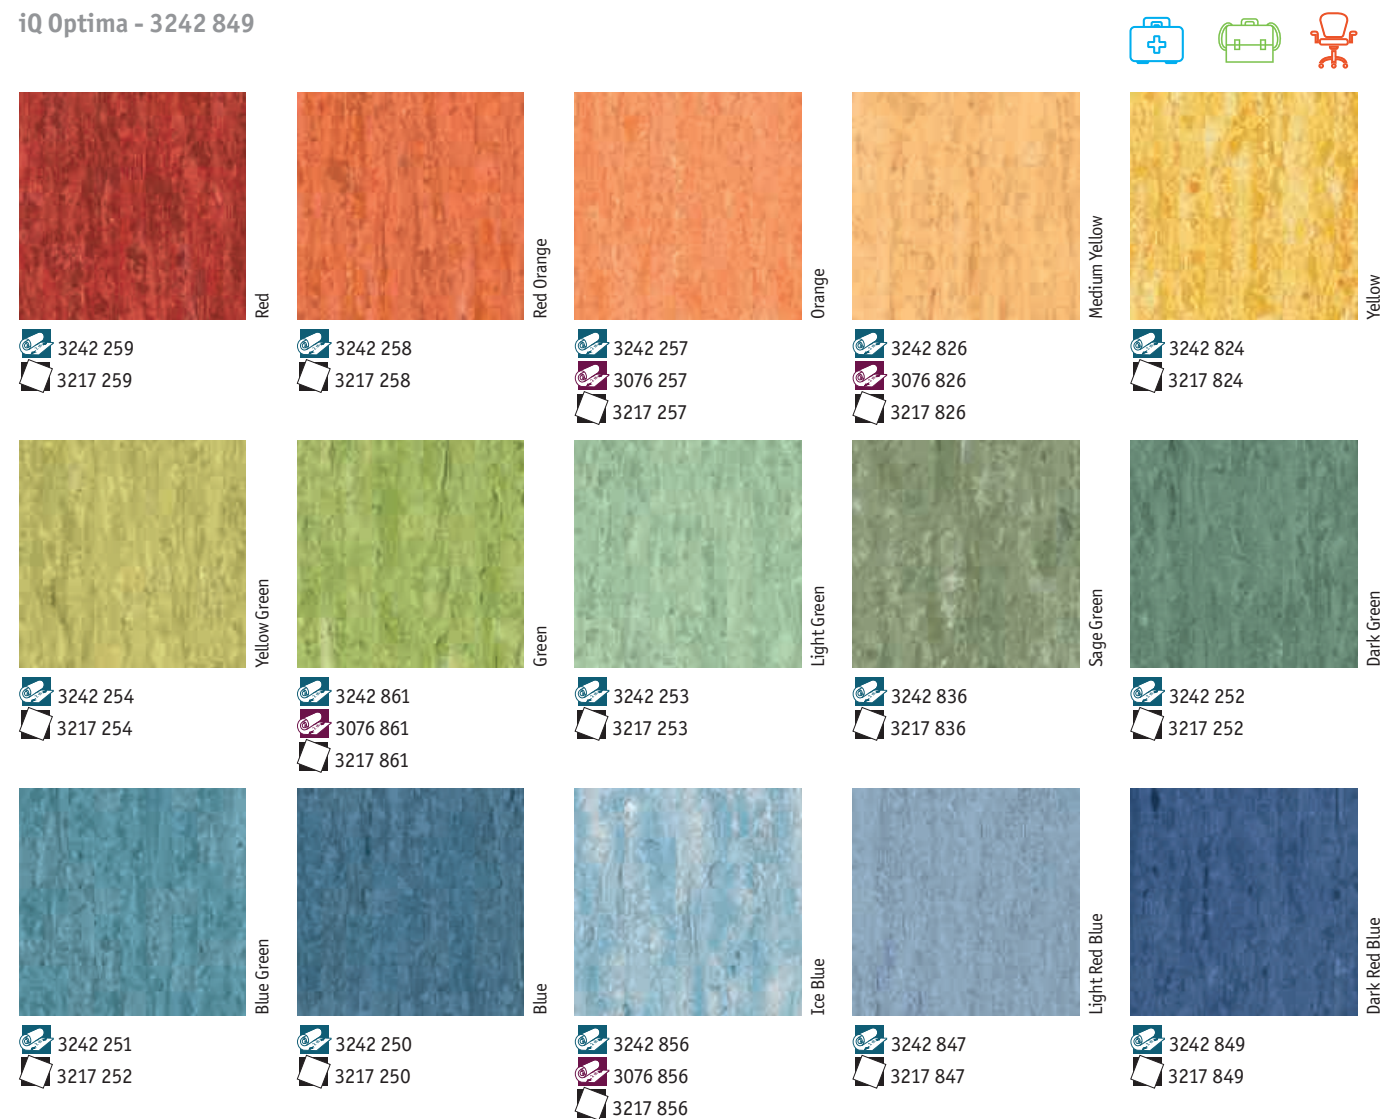

TECHNICAL DATA	STANDARDS	iQ Optima	iQ Optima Acoustic
Classification			
Type of floorcovering	ISO 10581 - compact ISO 11638 - acoustic	Homogeneous vinyl flooring	Homogeneous vinyl flooring with foam interlayer
Classification	ISO 10581 commercial industrial	Classes: 34 43	Classes: 34 42
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.00mm	3.70mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	
Total weight	ISO 23997 (EN 430)	2 700g/m ²	3 500g/m ²
iQ PUR	-	Yes	
Binder content	ISO 10581 - compact ISO 10582 - acoustic	Type I —	— Type II
Technical performance			
Impact sound reduction	EN ISO 717/2	—	Approx. +17dB
Acoustic improvement	NF S31-074	—	L _{n,e,w} < 65dB Class A
Residual indentation	Best measured value	0.02mm	0.17mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	≤ 0.20mm
Reaction to fire	EN ISO 9239-1 EN ISO 13501-1 EN ISO 11925-2	≥ 8 kW/m ² B _{fl} ≤ 1 Pass	
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40% for rolls ≤ 0.25% for tiles	≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable	
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	—	
Static electric charge	EN 1815	< 2kV	
Light fastness	EN ISO 105-B02	≥ 7	
Chemical resistance	ISO 26987 (EN 423)	Excellent	
Fungi and bacteria resistance	ISO 846: Part C	Does not encourage growth	
Clean room test	ASTM F51/00 ISO 14644-1	Class A ISO Class 4	— —
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C	Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

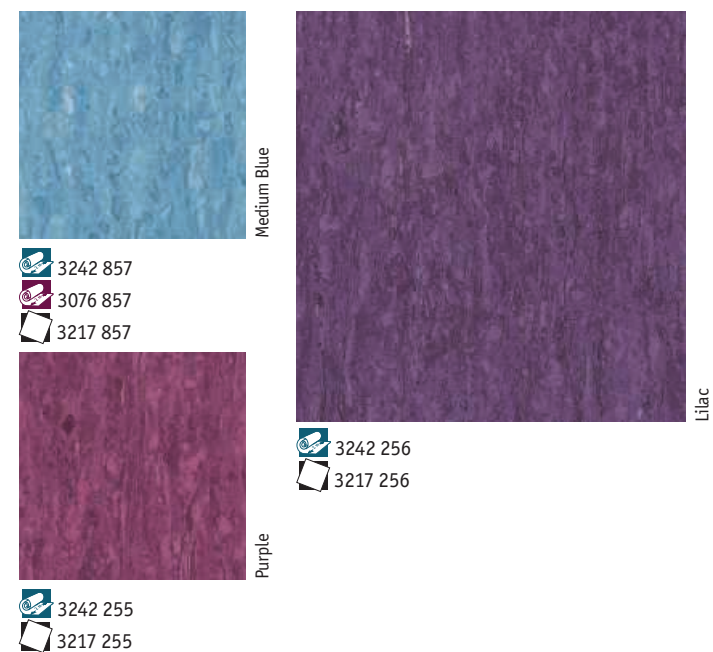

iQ OPTIMA Colours

Main Product Features

- A timeless classic revisited in an amazing palette of 64 colours
- iQ Unique Surface Restoration system
- Extreme durability and outstanding flexibility
- Lowest life cycle cost on the market
- iQ Optima Acoustic 17dB available
- Coordinated with wetroom solution: Optima Multisafe

Surface Treatment




Sustainability Tag



iQ Optima




iQ Optima Acoustic



Logistics Information




General Information

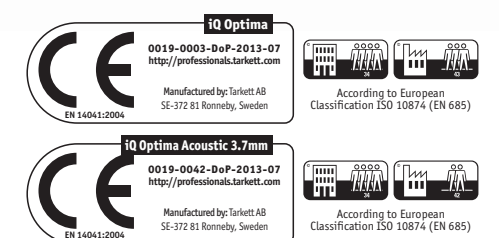

iQ OPTIMA



iQ Optima - 3242 875

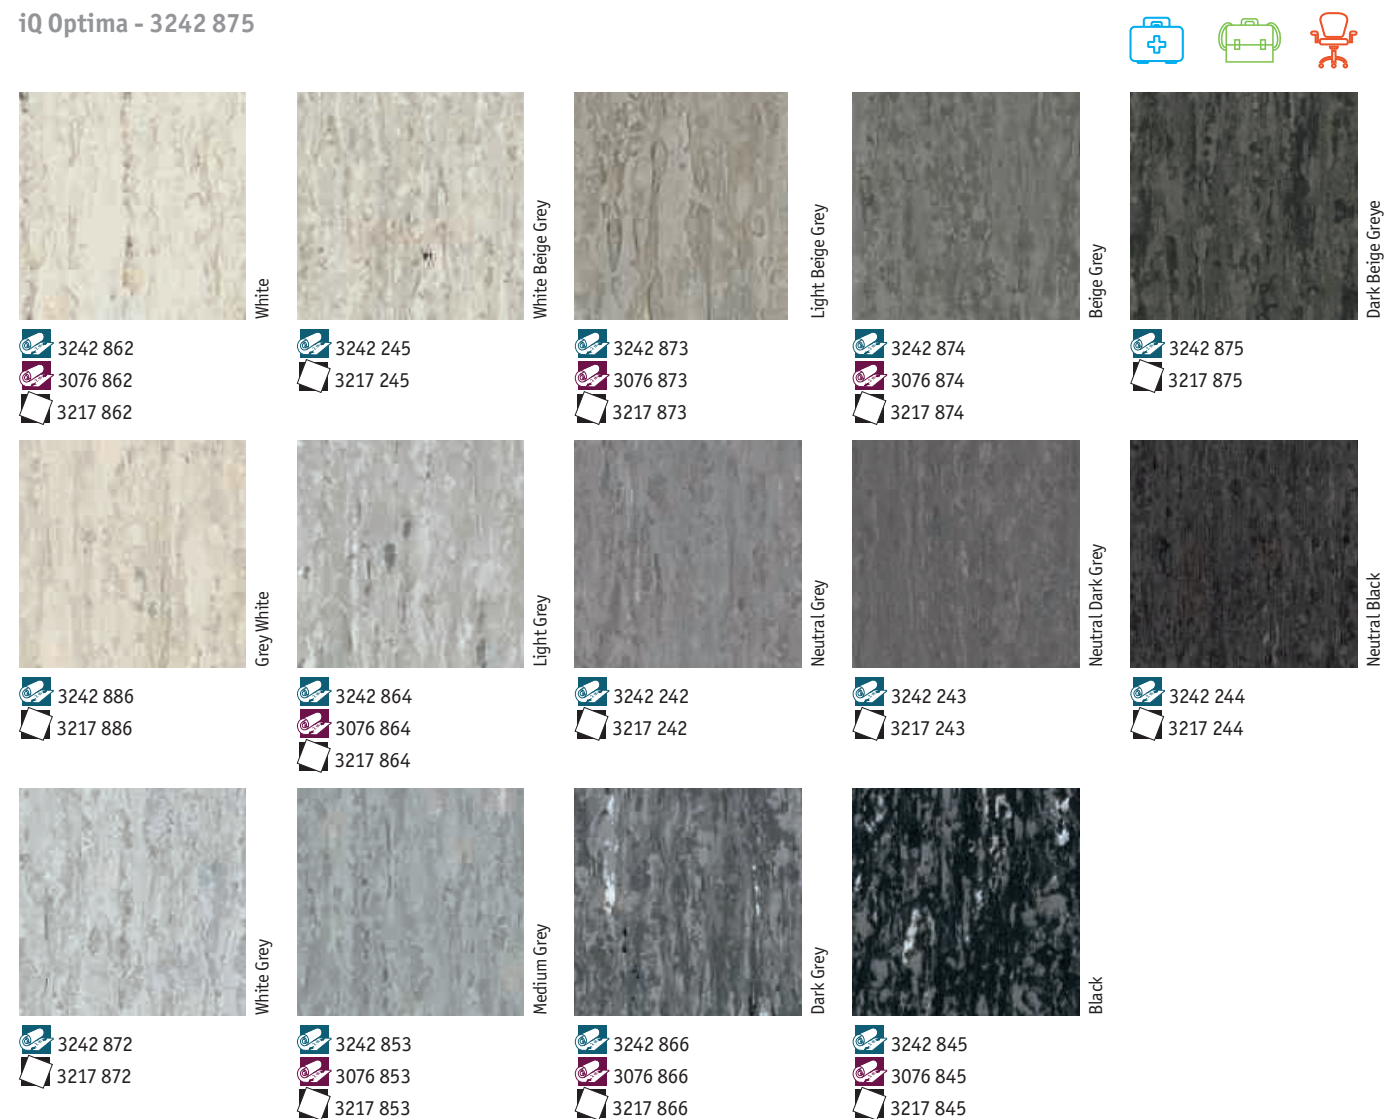

TECHNICAL DATA	STANDARDS	iQ Optima	iQ Optima Acoustic
Classification			
Type of floorcovering	ISO 10581 - compact ISO 11638 - acoustic	Homogeneous vinyl flooring	Homogeneous vinyl flooring with foam interlayer
Classification	ISO 10581 commercial industrial	Classes: 34 43	Classes: 34 42
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.00mm	3.70mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	
Total weight	ISO 23997 (EN 430)	2 700g/m ²	3 500g/m ²
iQ PUR	-	Yes	
Binder content	ISO 10581 - compact ISO 10582 - acoustic	Type I —	— Type II
Technical performance			
Impact sound reduction	EN ISO 717/2	—	Approx. +17dB
Acoustic improvement	NF S31-074	—	L _{n,e,w} < 65dB Class A
Residual indentation	Best measured value	0.02mm	0.17mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	≤ 0.20mm
Reaction to fire	EN ISO 9239-1 EN ISO 13501-1 EN ISO 11925-2	≥ 8 kW/m ² B _f ≤ 1 Pass	
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40% for rolls ≤ 0.25% for tiles	≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable	
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	—	
Static electric charge	EN 1815	< 2kV	
Light fastness	EN ISO 105-B02	≥ 7	
Chemical resistance	ISO 26987 (EN 423)	Excellent	
Fungi and bacteria resistance	ISO 846: Part C	Does not encourage growth	
Clean room test	ASTM F51/00 ISO 14644-1	Class A ISO Class 4	— —
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C	Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.



iQ OPTIMA Neutrals


Main Product Features

- A timeless classic revisited in an amazing palette of 64 colours
- iQ Unique Surface Restoration system
- Extreme durability and outstanding flexibility
- Lowest life cycle cost on the market
- iQ Optima Acoustic 17dB available
- Coordinated with wetroom solution: Optima Multisafe



Surface Treatment




Sustainability Tag

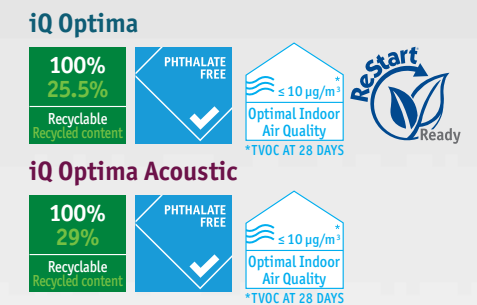

Logistics Information



General Information

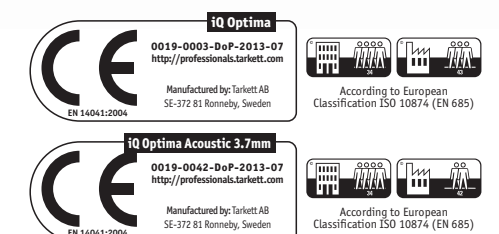


See page 540 for coordinated accessories offer 113

iQ OPTIMA




iQ Optima - 3242 860

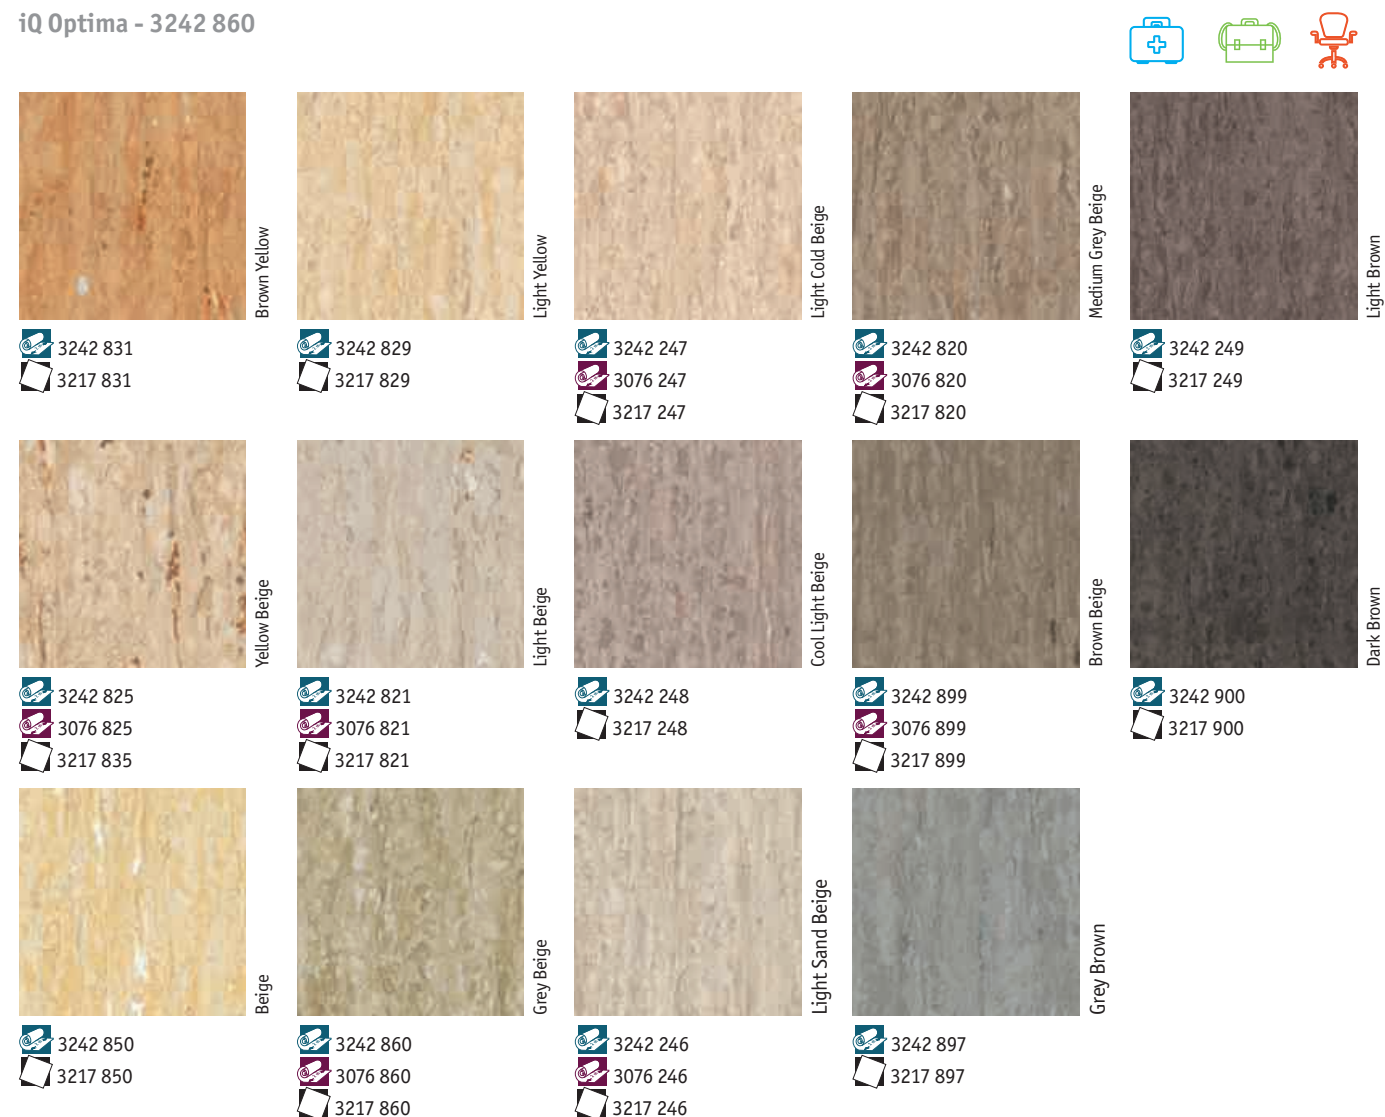

TECHNICAL DATA	STANDARDS	iQ Optima	iQ Optima Acoustic
Classification			
Type of floorcovering	ISO 10581 - compact ISO 11638 - acoustic	Homogeneous vinyl flooring	Homogeneous vinyl flooring with foam interlayer
Classification	ISO 10581 commercial industrial	Classes: 34 43	Classes: 34 42
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.00mm	3.70mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	
Total weight	ISO 23997 (EN 430)	2 700g/m ²	3 500g/m ²
iQ PUR	-	Yes	
Binder content	ISO 10581 - compact ISO 10582 - acoustic	Type I —	— Type II
Technical performance			
Impact sound reduction	EN ISO 717/2	—	Approx. +17dB
Acoustic improvement	NF S31-074	—	L _{n,e,w} < 65dB Class A
Residual indentation	Best measured value	0.02mm	0.17mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	≤ 0.20mm
Reaction to fire	EN ISO 9239-1 EN ISO 13501-1 EN ISO 11925-2	≥ 8 kW/m ² B _f ≤ 1 Pass	
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40% for rolls ≤ 0.25% for tiles	≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable	
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	—	
Static electric charge	EN 1815	< 2kV	
Light fastness	EN ISO 105-B02	≥ 7	
Chemical resistance	ISO 26987 (EN 423)	Excellent	
Fungi and bacteria resistance	ISO 846: Part C	Does not encourage growth	
Clean room test	ASTM F51/00 ISO 14644-1	Class A ISO Class 4	— —
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C	Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

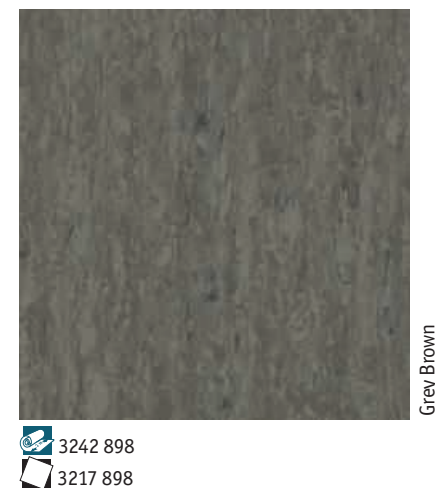

iQ OPTIMA Neutrals

Main Product Features

- A timeless classic revisited in an amazing palette of 64 colours
- iQ Unique Surface Restoration system
- Extreme durability and outstanding flexibility
- Lowest life cycle cost on the market
- iQ Optima Acoustic 17dB available
- Coordinated with wetroom solution: Optima Multisafe

Surface Treatment




Sustainability Tag



iQ Optima




iQ Optima Acoustic



Logistics Information



General Information

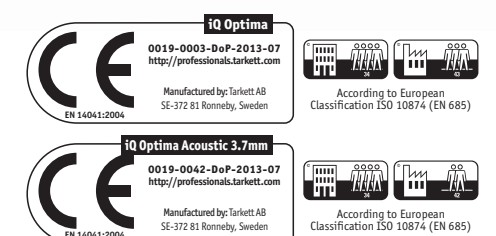

See page 540 for coordinated accessories offer 115


iQ OPTIMA




iQ Optima - 3077 951



Mono

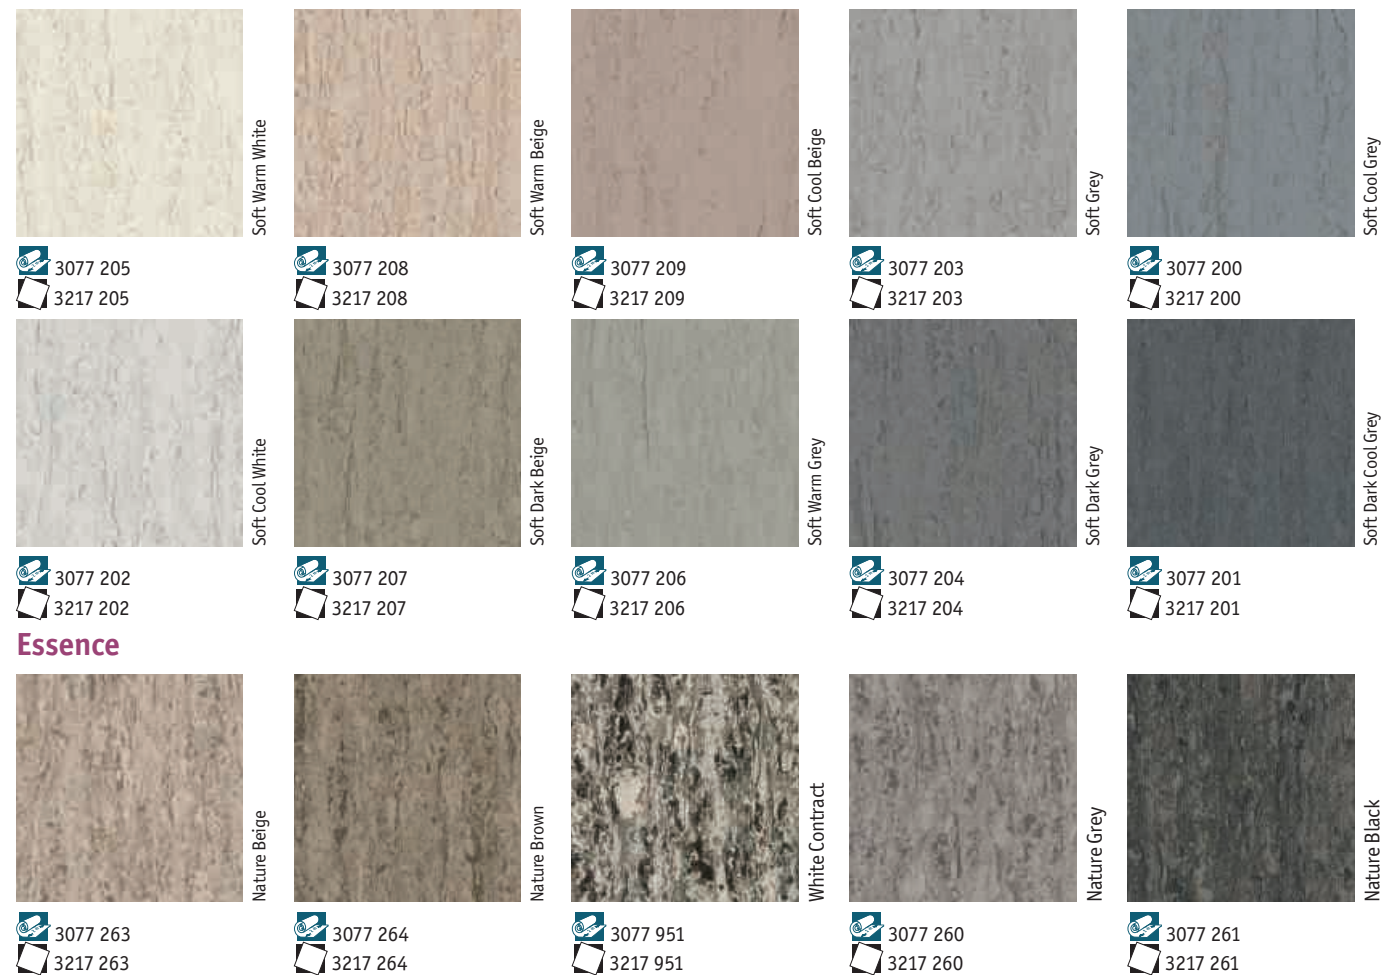

Essence

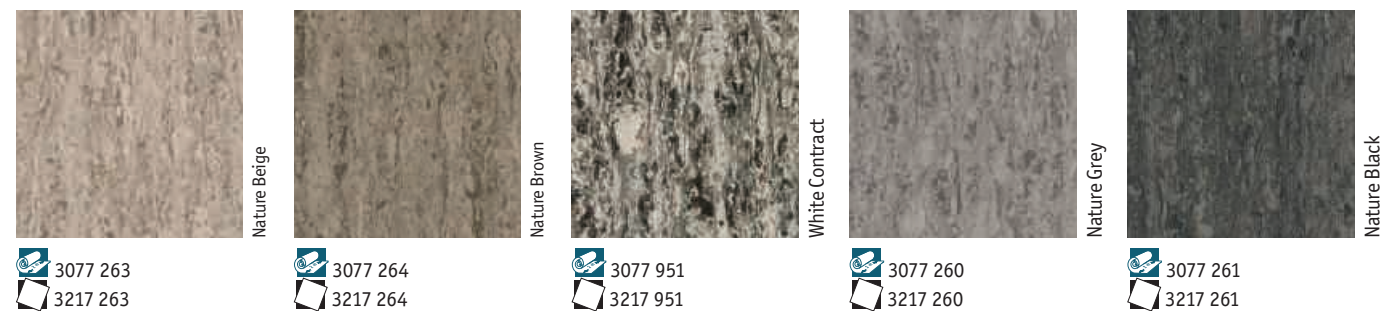

TECHNICAL DATA	STANDARDS	iQ Optima
Classification		
Type of floorcovering	ISO 10581	Homogeneous vinyl flooring
Classification	ISO 10581 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	2 700g/m ²
iQ PUR	-	Yes
Binder content	ISO 10581	Type I
Technical performance		
Impact sound reduction	EN ISO 717/2	—
Acoustic improvement	NF S31-074	—
Residual indentation	Best measured value	0.02mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN ISO 9239-1	≥ 8 kW/m ²
	EN ISO 13501-1	B _{s1}
	EN ISO 11925-2	Pass
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40% for rolls ≤ 0.25% for tiles
Castor wheel test	ISO 4918 (EN 425)	Suitable
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	—
Static electric charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ 7
Chemical resistance	ISO 26987 (EN 423)	Excellent
Fungi and bacteria resistance	ISO 846: Part C	Does not encourage growth
Clean room test	ASTM F51/00 ISO 14644-1	Class A ISO Class 4
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

Essence



iQ OPTIMA Mono & Essence

Main Product Features

- A timeless classic revisited in an amazing palette of 64 colours
- iQ Unique Surface Restoration system
- Extreme durability and outstanding flexibility
- Lowest life cycle cost on the market
- iQ Optima Acoustic 17dB available
- Coordinated with wetroom solution: Optima Multisafe

Surface Treatment



Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 25lm

Laying direction:

Available in tiles

Laying direction:

General Information

