

PREMIUM



High-quality vinyl flooring for a wide range of uses, from education and healthcare to offices and public buildings

SENSORY BENEFITS

- Palette of 102 contemporary colours including enriched neutral shades
- 18 core matching, best-selling colours in every range
- Unique combination of three non-directional patterns for complete aesthetic coherence
- Multicolour welding rods for perfect finishing

FUNCTIONAL BENEFITS

- The Premium range blends function - Acoustic, SD and Safe.T - with colour
- No additional surface treatment needed

- Flexible flooring solutions for perfect coving results and improved maintenance
- Specially designed for heavy-traffic zones where hygiene and resistance are critical, such as schools, hospitals and public buildings

ENVIRONMENTAL BENEFITS

- Produced with phthalate-free technology
- Extremely low VOC emissions
- Significantly reduces use of water, energy and chemical detergents for a smaller environmental footprint and excellent life-cycle cost

TECHNICAL DATA	STANDARDS	Primo Premium	Eclipse Premium	Primo Acoustic
Classification				
Type of floorcovering	ISO 10581 - compact ISO 11638 - acoustic	Homogeneous vinyl flooring		Homogeneous vinyl flooring with foam interlayer
Classification	ISO 10874 commercial industrial	Classes: 34 43	Classes: 34 43	Classes: 34 42
Characteristics				
Total thickness	ISO 24346 (EN 428)	2.00mm		3.70mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm		2.00mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²	3 000g/m ²	3 600g/m ²
Surface treatment	-	PUR Reinforced		PUR Reinforced
Binder content	ISO 10581 - compact ISO 10582 - acoustic	Type I —		— Type II
Technical performance				
Impact sound reduction	EN ISO 717/2	--		Approx. +17dB
Acoustic improvement	NF S31-074	--		L _{n,e,w} < 65dB Class A
Residual indentation	Best measured value	0.03mm		-
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	≤ 0.10mm	≤ 0.20mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B _{fl} s1 ≥ 8 kW/m ² Pass		Class B _{fl} s1 ≥ 8 kW/m ² Pass
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%		Rolls: ≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable		Suitable
Static electrical charge	EN 1815	< 2kV	< 2kV	-
Light fastness	EN ISO 105-B02	≥ level 6		≥ level 6
Chemical resistance	ISO 26987 (EN 423)	Good resistance		Good resistance
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth		Does not favour growth
Clean room test	ISO 14644-1	ISO Class 4	-	ISO Class 4
	ASTM F51/00	Class A		Class A
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3		R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C		Approx. 0.01m ² K/W Suitable - max. 27°C
Form of delivery	ISO 24341 (EN 426) ISO 24342 (EN 427)	Sheet (rolls): 23lm x 2m Tiles: 61 x 61cm	Sheet (rolls): 23lm x 2m Tiles: 61 x 61cm and 30 x 30cm	Sheet (rolls): 23lm x 2m
Colours	EN 12667 / DIN 52612	36	66	18

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

PRIMO PREMIUM ECLIPSE PREMIUM

Homogeneous vinyl flooring:
No additional surface treatment needed



PRIMO ACOUSTIC

- 1 Homogeneous vinyl flooring:
No additional surface treatment needed
- 2 Foam underlayer:
provides up to 17dB impact sound reduction and walking comfort


















PRIMO PREMIUM



Primo Premium - 20010676



 Light Pure Grey 21010 651 21014 651 21011 651	 Medium Pure Grey 21010 670 21014 670 21011 670	 Medium Dark Pure Grey 21010 671 21014 671 21011 671	 Light Warm Grey 21010 672 21014 672 21011 672	 Medium Cool Grey 21010 673 21014 673 21011 673
 Dark Cool Grey 21010 674 21014 674 21011 674	 Black 21010 654 21010 654	 Dark Cool Beige 21010 676 21014 676 21011 676	 Medium Cool Beige 21010 657 21014 657 21011 657	 Light Cool Beige 21010 675 21014 675 21011 675
 Dark Warm Beige 21010 659 21014 659 21011 659	 Medium Warm Beige 21010 658 21014 658 21011 658	 Light Beige 21010 678 21014 678 21011 678	 Medium Dark Warm Grey 21010 683 21011 683	 Pure Grey 21010 652 21011 652

TECHNICAL DATA	STANDARDS	Primo Premium	Primo Acoustic
Classification			
Type of floorcovering	ISO 10581 - compact ISO 11638 - acoustic	Homogeneous vinyl flooring	Homogeneous vinyl flooring with foam interlayer
Classification	ISO 10874 commercial industrial	Classes: 34 43	Classes: 34 42
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.00mm	3.70mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	2.00mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²	3 600g/m ²
Surface treatment	-	PUR Reinforced	PUR Reinforced
Binder content	ISO 10581 - compact ISO 10582 - acoustic	Type I —	— Type II
Technical performance			
Impact sound reduction Acoustic improvement	EN ISO 717/2 NF S31-074	—	Approx. +17dB
	Best measured value	0.03mm	—
Residual indentation	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	≤ 0.20mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B _n s1 ≥ 8 kW/m ² Pass	Class B _n s1 ≥ 8 kW/m ² Pass
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%	Rolls: ≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable	Suitable
Static electrical charge	EN 1815	< 2kV	—
Light fastness	EN ISO 105-B02	≥ level 6	≥ level 6
Chemical resistance	ISO 26987 (EN 423)	Good resistance	Good resistance
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth	Does not favour growth
Clean room test	ISO 14644-1	ISO Class 4	ISO Class 4
	ASTM F51/00	Class A	Class A
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C	Approx. 0.01m ² K/W Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

PRIMO PREMIUM

Main Product Features

- Multi-solution offer
- No additional surface treatment needed
- Flexible flooring solutions for perfect coving results and improved maintenance
- Extremely low VOC emissions
- Excellent life-cycle cost

Surface Treatment



Sustainability Tag

Primo Premium




Primo Acoustic




Logistics Information

Available in rolls
Rolls length: 23lm

Laying direction: 

Available in tiles

Laying direction: 


General Information



PRIMO PREMIUM



Primo Premium - 21010681

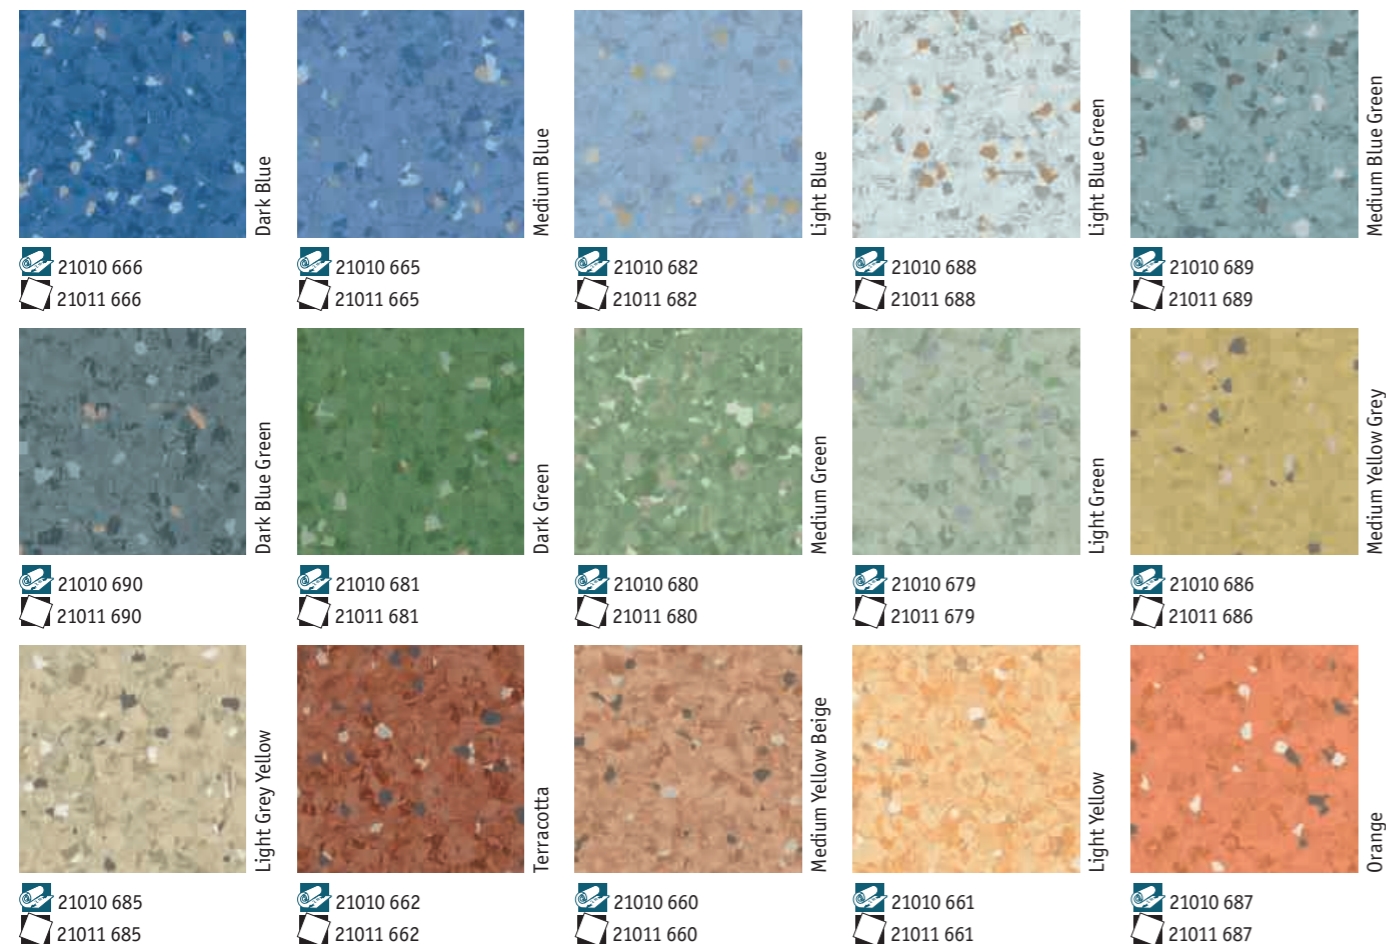

TECHNICAL DATA	STANDARDS	Primo Premium
Classification		
Type of floorcovering	ISO 10581	Homogeneous vinyl flooring
Classification	ISO 10874 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²
Surface treatment	-	PUR Reinforced
Binder content	ISO 10581	Type I
Technical performance		
Impact sound reduction	EN ISO 717/2	-
Acoustic improvement	NF 531-074	-
	Best measured value	0.03mm
Residual indentation	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B _{s1} s1 ≥ 8 kW/m ² Pass
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%
Castor wheel test	ISO 4918 (EN 425)	Suitable
Static electrical charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ level 6
Chemical resistance	ISO 26987 (EN 423)	Good resistance
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth
Clean room test	ISO 14644-1 ASTM F51/00	ISO Class 4 Class A
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Thermal resistance	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

PRIMO PREMIUM

Main Product Features

- Multi-solution offer
- No additional surface treatment needed
- Flexible flooring solutions for perfect coving results and improved maintenance
- Extremely low VOC emissions
- Excellent life-cycle cost

Surface Treatment



Sustainability Tag

Primo Premium



Primo Acoustic



Logistics Information


Available in rolls
Rolls length: 231m

Laying direction:

Available in tiles

Laying direction:

General Information























ECLIPSE PREMIUM



Eclipse Premium - 21020971, 21020970



 Charcoal 21020 989 21021 989 21022 989	 Dark Cool Grey 21020 968 21021 968 21022 968	 Medium Cool Grey 21020 967 21021 967 21022 967	 Medium Dark Pure Grey 21020 965 21021 965 21022 965	 Medium Pure Grey 21020 964 21021 964 21022 964
 Light Pure Grey 21020 963 21021 963 21022 963	 Light Warm Grey 21020 966 21021 966 21022 966	 Light Medium Warm Grey 21020 987 21021 987 21022 987	 Medium Warm Grey 21020 988 21021 988 21022 988	 Light Cool Beige 21020 969 21021 969 21022 969
 Medium Light Cool Beige 21020 981 21021 981 21022 981	 Medium Cool Beige 21020 992 21021 992 21022 992	 Medium Beige 21020 970 21021 970 21022 970	 Medium Dark Cool Beige 21020 982 21021 982 21022 982	 Brown 21020 728 21021 728 21022 728
 Dark Cool Beige 21020 983 21021 983 21022 983	 Dark Cool Beige 21020 971 21021 971 21022 971	 Medium Warm Beige 21020 973 21021 973 21022 973	 Dark Warm Beige 21020 974 21021 974 21022 974	 Medium Yellow Beige 21020 994 21021 994 21022 994

TECHNICAL DATA	STANDARDS	Eclipse Premium
Classification		
Type of floorcovering	ISO 10581	Homogeneous vinyl flooring
Classification	ISO 10874 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²
Surface treatment	-	PUR Reinforced
Binder content	ISO 10581	Type I
Technical performance		
Impact sound reduction	EN ISO 717/2	-
Acoustic improvement	NF S31-074	-
Residual indentation	Best measured value	0.03mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B _{s1} s1 ≥ 8 kW/m ² Pass
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%
Castor wheel test	ISO 4918 (EN 425)	Suitable
Static electrical charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ level 6
Chemical resistance	ISO 26987 (EN 423)	Good resistance
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth
Clean room test	ASTM F51/00	-
Slip resistance	DIN 51130	R9
	EN 13893	≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

 Medium Light Yellow Beige 21020 993 21021 993 21022 993	 Light Beige 21020 972 21021 972 21022 972
---	---

ECLIPSE PREMIUM

Main Product Features

- Multi-solution offer
- No additional surface treatment needed
- Flexible flooring solutions for perfect coving results and improved maintenance
- Extremely low VOC emissions
- Excellent life-cycle cost

Surface Treatment





Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 231m



General Information























ECLIPSE PREMIUM




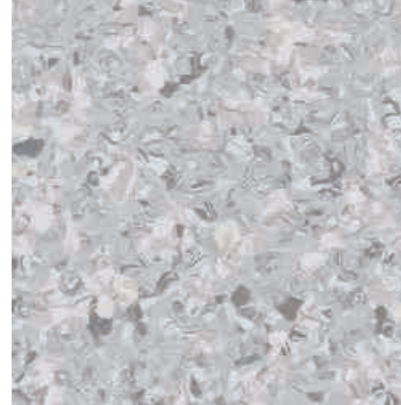
Eclipse Premium - 21020984, 21020985, 21020986, 21020987



 Gold 21020 995 21021 995 21022 995	 Rust 21020 727 21021 727 21022 727	 Red Brick 21020 729 21021 729 21022 729	 Yellow 21020 732 21021 732 21022 732	 Light Yellow Beige 21020 738 21021 738 21022 738
 Light Yellow Green 21020 739 21021 739 21022 739	 Medium Yellow Green 21020 650 21021 650 21022 650	 Light Grey Green 21020 736 21021 736 21022 736	 Medium Yellow Grey 21020 737 21021 737 21022 737	 Light Green 21020 975 21021 975 21022 975
 Medium Green 21020 976 21021 976 21022 976	 Dark Green 21020 977 21021 977 21022 977	 Light Teal 21020 984 21021 984 21022 984	 Medium Teal 21020 985 21021 985 21022 985	 Dark Teal 21020 986 21021 986 21022 986
 Light Blue 21020 978 21021 978 21022 978	 Medium Denim Blue 21020 991 21021 991 21022 991	 Light Denim Blue 21020 990 21021 990 21022 990	 Medium Blue 21020 979 21021 979 21022 979	 Dark Blue 21020 980 21021 980 21022 980

TECHNICAL DATA	STANDARDS	Eclipse Premium
Classification		
Type of floorcovering	ISO 10581	Homogeneous vinyl flooring
Classification	ISO 10874 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²
Surface treatment	-	PUR Reinforced
Binder content	ISO 10581	Type I
Technical performance		
Impact sound reduction Acoustic improvement	EN ISO 717/2 NF 531-074	— —
Residual indentation	Best measured value	0.03mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B _{s1} s1 ≥ 8 kW/m ² Pass
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%
Castor wheel test	ISO 4918 (EN 425)	Suitable
Static electrical charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ level 6
Chemical resistance	ISO 26987 (EN 423)	Good resistance
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth
Clean room test	ASTM F51/00	—
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

 Light Pure Grey 21020 038 21021 038 21022 038	 Medium Pure Grey 21020 039 21021 039 21022 039
---	--

ECLIPSE PREMIUM

Main Product Features

- Multi-solution offer
- No additional surface treatment needed
- Flexible flooring solutions for perfect coving results and improved maintenance
- Extremely low VOC emissions
- Excellent life-cycle cost

Surface Treatment





Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 23lm

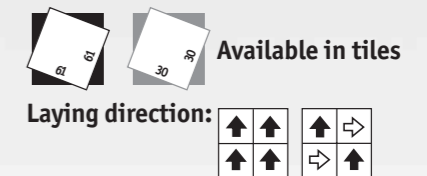

General Information
























ECLIPSE PREMIUM




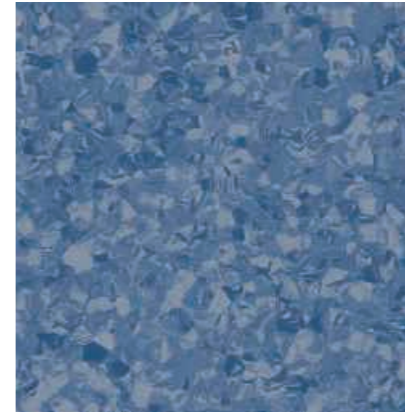
Eclipse Premium - 21020731, 21020978



 Medium Dark Pure Grey 21020 040 21021 040 21022 040	 Medium Dark Plus Grey 21020 014 21021 014 21022 014	 Medium Dark Plus Grey 21020 026 21021 026 21022 026	 Light Warm Grey 21020 035 21021 035 21022 035	 Medium Cool Grey 21020 012 21021 012 21022 012	 Dark Cool Grey
 Light Beige 21020 648 21021 648 21022 648	 Medium Warm Beige 21020 036 21021 036 21022 036	 Dark Warm Beige 21020 037 21021 037 21022 037	 Light Cool Beige 21020 645 21021 645 21022 645	 Medium Cool Beige 21020 646 21021 646 21022 646	
 Dark Cool Beige 21020 647 21021 647 21022 647	 Light Terracotta 21020 005 21021 005 21022 005	 Terracotta 21020 018 21021 018 21022 018	 Medium Gold 21020 004 21021 004 21022 004	 Light Green 21020 649 21021 649 21022 649	
 Medium Green 21020 010 21021 010 21022 010	 Dark Green 21020 011 21021 011 21022 011	 Light Blue 21020 056 21021 056 21022 056	 Medium Blue 21020 730 21021 730 21022 730	 Dark Blue 21020 731 21021 731 21022 731	

TECHNICAL DATA	STANDARDS	Eclipse Premium
Classification		
Type of floorcovering	ISO 10581	Homogeneous vinyl flooring
Classification	ISO 10874 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²
Surface treatment	-	PUR Reinforced
Binder content	ISO 10581	Type I
Technical performance		
Impact sound reduction	EN ISO 717/2	-
Acoustic improvement	NF S31-074	-
Residual indentation	Best measured value	0.03mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B _{fl} s1 ≥ 8 kW/m ² Pass
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%
Castor wheel test	ISO 4918 (EN 425)	Suitable
Static electrical charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ level 6
Chemical resistance	ISO 26987 (EN 423)	Good resistance
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth
Clean room test	ASTM F51/00	-
Slip resistance	DIN 51130	R9
	EN 13893	≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

 Medium Grey Blue 21020 067 21021 067 21022 067	 Dark Grey Blue 21020 016 21021 016 21022 016
--	--

ECLIPSE PREMIUM

Main Product Features

- Multi-solution offer
- No additional surface treatment needed
- Flexible flooring solutions for perfect coving results and improved maintenance
- Extremely low VOC emissions
- Excellent life-cycle cost

Surface Treatment




Sustainability Tag




Logistics Information


Available in rolls
Rolls length: 23m



Available in tiles



General Information





Cost-effective, multipurpose vinyl flooring for the education, retail and commercial sectors

SENSORY BENEFITS

- Available in both directional and non-directional patterns
- Classic designs

FUNCTIONAL BENEFITS

- Practical patterns
- Weldable formulation
- PUR surface treatment for easier initial maintenance*

ENVIRONMENTAL BENEFITS

- Recyclable
- Low VOC emissions



*Except Vylon Plus: factory pre-treated



CONTRACT PLUS
STANDARD PLUS
VYLON PLUS

TECHNICAL DATA	STANDARDS	Contract Plus	Standard Plus 2.0mm	Standard Plus 1.5mm	Vylon Plus
Classification					
Classification	ISO 10581 commercial industrial	Classes: 34 43	Classes: 34 43	Classes: 32 41	Classes: 34 43
Characteristics					
Total thickness	ISO 24346 (EN 428)	2.00mm	2.00mm	1.5mm	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	2.00mm	1.5mm	2.00mm
Total weight	ISO 23997 (EN 430)	3 150g/m ²	3 300g/m ²	2 475g/m ²	3 700g/m ²
Surface treatment	-	PUR			Factory pre-treated
Binder content	ISO 10581	Type II			Type III
Technical performance					
Residual indentation	Best measured value	0.04mm			
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm			
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B _f s1 ≥ 8 kW/m ² Pass			
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40%	Rolls: ≤ 0.40% Tiles: ≤ 0.25%	Rolls: ≤ 0.40%	Rolls: ≤ 0.40% Tiles: ≤ 0.25%
Castor wheel test	ISO 4918 (EN 425)	Suitable			
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	—	0575	—	0575
Static electrical charge	EN 1815	< 2kV			
Light fastness	EN ISO 105-B02	≥ 6			
Chemical resistance	ISO 26987 (EN 423)	Good resistance			
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth			
Clean room test	ASTM F51/00	Class A			
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3			
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	0.01m ² K/W Suitable - max. 27°C		Suitable - max. 27°C	0.01m ² K/W Suitable - max. 27°C
Form of delivery	ISO 24341 (EN 426) ISO 24342 (EN 427)	Rolls: 23lm x 2m	Rolls: 23lm x 2m Tiles: 50 x 50cm	Rolls: 25lm x 2m	Rolls: 20lm x 2m Tiles: 61 x 61cm 30 x 30cm
Colours	EN 12667 / DIN 52612	24	30 (rolls) 10 (tiles)	12	18

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

CONTRACT PLUS



TECHNICAL DATA	STANDARDS	Contract Plus
Classification		
Classification	ISO 10581 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	3 150g/m ²
Surface treatment	-	PUR
Binder content	ISO 10581	Type II
Technical performance		
Residual indentation	Best measured value	0.04mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B _{fl} s1 ≥ 8 kW/m ² Pass
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable
Static electrical charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	ISO 26987 (EN 423)	Good resistance
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth
Clean room test	ASTM F51/00	Class A
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	0.01m ² K/W Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

CONTRACT PLUS

Main Product Features

- Non-directional pattern
- Wide and coordinated colour range
- Durable
- PUR surface treatment (no initial surface treatment needed)
- Good chemical resistance

Surface Treatment



Sustainability Tag



Logistics Information


Available in rolls
Rolls length: 231m

Laying direction:

General Information



Contract Plus - 21455 013

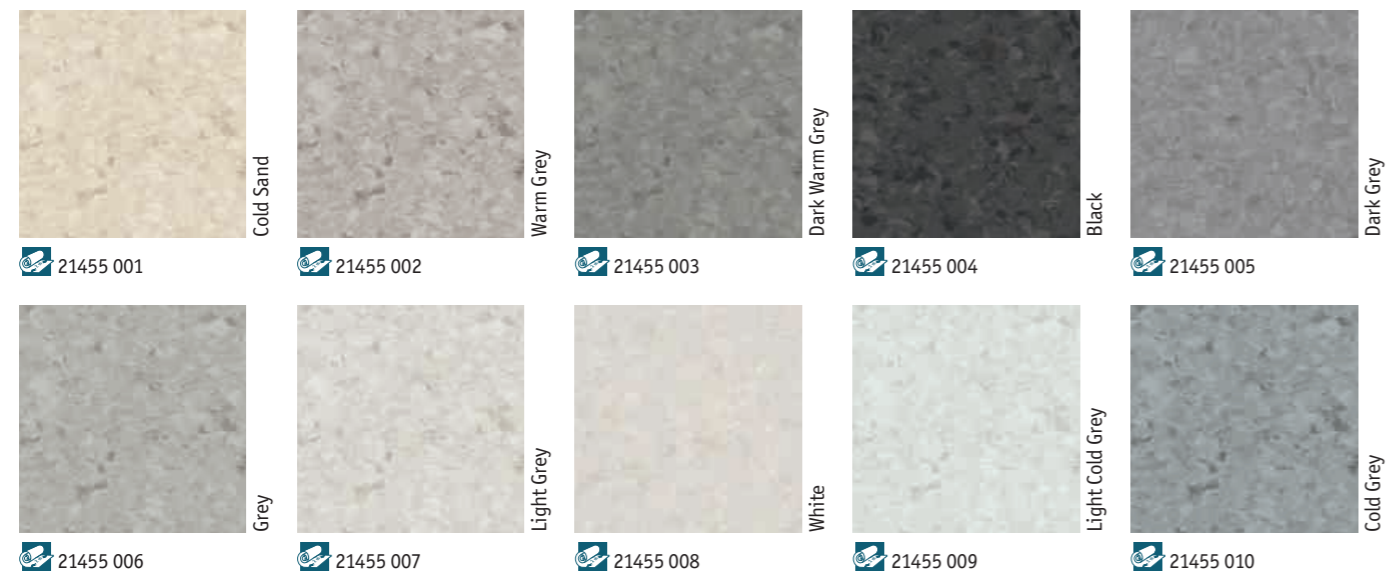

CONTRACT PLUS



Contract Plus - 21455 021, 21455 023



Cold Beige

21455 012



Cold Brown

21455 013



Beige

21455 014



Brown

21455 015




Warm Beige

21455 016



Warm Sand

21455 017




Light Sand

21455 018



Yellow

21455 020



Green

21455 021



Light Green

21455 022



Blue

21455 023



Light Blue

21455 024

TECHNICAL DATA	STANDARDS	Contract Plus
Classification		
Classification	ISO 10581 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	3 150g/m ²
Surface treatment	-	PUR
Binder content	ISO 10581	Type II
Technical performance		
Residual indentation	Best measured value	0.04mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B _f s1 ≥ 8 kW/m ² Pass
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable
Static electrical charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	ISO 26987 (EN 423)	Good resistance
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth
Clean room test	ASTM F51/00	Class A
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	0.01m ² K/W Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.



Orange

21455 019

CONTRACT PLUS

Main Product Features

- Non-directional pattern
- Wide and coordinated colour range
- Durable
- PUR surface treatment (no initial surface treatment needed)
- Good chemical resistance



Surface Treatment



Sustainability Tag



Logistics Information



General Information



STANDARD PLUS




Standard Plus - 21003 924



21 003 497
21 004 497



21 003 924
21 005 924
21 006 924



21 003 498
21 004 498
21 005 498
21 006 498




21 003 499



21 003 910



21 003 911
21 004 911
21 005 911
21 006 911



21 003 482
21 004 482



21 003 912
21 004 912



21 003 913
21 005 913
21 006 913



21 003 914



21 003 915

TECHNICAL DATA	STANDARDS	Standard Plus 2.0mm	Standard Plus 1.5mm
Classification			
Classification	ISO 10581 commercial industrial	Classes: 34 43	Classes: 32 41
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.00mm	1.5mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	1.5mm
Total weight	ISO 23997 (EN 430)	3 300g/m ²	2 475g/m ²
Surface treatment	-	PUR	
Binder content	ISO 10581	Type II	
Technical performance			
Residual indentation	Best measured value	0.04mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B _{fl} s1 ≥ 8 kW/m ² Pass	
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%	Rolls: ≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable	
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	0575	-
Static electrical charge	EN 1815	< 2kV	
Light fastness	EN ISO 105-B02	≥ 6	
Chemical resistance	ISO 26987 (EN 423)	Good resistance	
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth	
Clean room test	ASTM F51/00	Class A	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	0.01m ² K/W Suitable - max. 27°C	Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.



21 003 496

STANDARD PLUS

Main Product Features

- Tiles and sheets in different thicknesses
- Classical design in refreshed colours
- Tough and durable
- PUR surface treatment for low maintenance

Surface Treatment




Sustainability Tag




Logistics Information

Available in rolls
Rolls length: 23lm (2.0mm)

Rolls length: 25lm (1.5mm)



Available in tiles




General Information



STANDARD PLUS



Standard Plus - 21003 483



21 003 921
21 005 921
21 006 921



21 003 922
21 004 922



21 003 923



21 003 494
21 004 494
21 005 494
21 006 494



21 003 919
21 004 919




21 003 492
21 004 492
21 005 492
21 006 492



21 003 920



21 003 479
21 004 479
21 005 479
21 006 479



21 003 483
21 005 483
21 006 483



21 003 484




21 003 485




21 003 916
21 004 916



21 003 917



21 003 488



21 003 918

TECHNICAL DATA	STANDARDS	Standard Plus 2.0mm	Standard Plus 1.5mm
Classification			
Classification	ISO 10581 commercial industrial	Classes: 34 43	Classes: 32 41
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.00mm	1.5mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	1.5mm
Total weight	ISO 23997 (EN 430)	3 300g/m ²	2 475g/m ²
Surface treatment	-	PUR	
Binder content	ISO 10581	Type II	
Technical performance			
Residual indentation	Best measured value	0.04mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B _{fl} s1 ≥ 8 kW/m ² Pass	
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%	Rolls: ≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable	
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	0575	-
Static electrical charge	EN 1815	< 2kV	
Light fastness	EN ISO 105-B02	≥ 6	
Chemical resistance	ISO 26987 (EN 423)	Good resistance	
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth	
Clean room test	ASTM F51/00	Class A	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	0.01m ² K/W Suitable - max. 27°C	Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.



21 003 495
21 004 495



21 003 493
21 005 493
21 006 493



21 003 500

STANDARD PLUS


Main Product Features

- Tiles and sheets in different thicknesses
- Classical design in refreshed colours
- Tough and durable
- PUR surface treatment for low maintenance

Surface Treatment



Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 23lm (2.0mm)

Rolls length: 25lm (1.5mm)

Laying direction:

Available in tiles

Laying direction:

General Information



VYLON PLUS



Vylon Plus - 21000 586, 21007 593



21 000 583 21 007 583 21 001 583	21 000 580 21 007 580 21 001 580	21 000 592 21 007 592 21 001 592	21 000 590 21 007 590 21 001 590	21 000 591 21 007 591 21 001 591
21 000 589 21 007 589 21 001 589	21 000 588 21 007 588 21 001 588	21 000 596 21 007 596 21 001 596	21 000 585 21 007 585 21 001 585	21 000 587 21 007 587 21 001 587
21 000 582 21 007 582 21 001 582	21 000 581 21 007 581 21 001 581	21 000 595 21 007 595 21 001 595	21 000 594 21 007 594 21 001 594	21 000 597 21 007 597 21 001 597

TECHNICAL DATA	STANDARDS	Vylon Plus
Classification		
Classification	ISO 10581 commercial industrial	Classes: 34 43
UPEC Classification	UPEC Classification	U4 P3 E2/3 C2
	NF UPEC.A+ certificate (NF 189)	312-024.1
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	3 700g/m ²
Surface treatment	-	Factory pre-treated
Binder content	ISO 10581	Type III
Technical performance		
Residual indentation	Best measured value	0.04mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B _f s1 ≥ 8 kW/m ² Pass
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%
Castor wheel test	ISO 4918 (EN 425)	Suitable
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	0575
Static electrical charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	ISO 26987 (EN 423)	Good resistance
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	0.01m ² K/W Suitable - max. 27 °C

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

21 000 584 21 007 584 21 001 584	21 000 586 21 007 586 21 001 586
21 000 593 21 007 593 21 001 593	

VYLON PLUS


Main Product Features

- Versatile flooring
- Harmonious and fresh colours
- Tough and durable
- Most flexible in its category

Surface Treatment

Factory pre-treated

Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 20lm

Laying direction:

Available in tiles

Laying direction:

General Information

