



SAFETY FLOORS

The UK has an enduring love for, or perhaps an incurable addiction to Safety flooring.

It is our standard 'go to' floorcovering for a commercial application, if in doubt - put some Safetred down.

Safetred sheet safety flooring has been made in the UK for over thirty years, and though the ultimate functional objective of the product remains consistent - ie to help us stop us falling over so much, the surface aesthetics have certainly moved on.

Now available as a broad range of contemporary visuals, the Safetred product range along with it's accompanying Safe T homogeneous sheet flooring collection offer industry leading performance and design.



FUNCTIONAL BENEFITS

An extensive range of heterogenous safety floors combining contemporary design with sustainable slip resistance


- Wide range of colours and designs
- Matching accessories for a perfect finish
- Unrivalled indoor air quality
- BRE A+ Environmental rating
- 17dB Acoustic options available
- Textile backed loose lay option available for fast and easy, adhesive free installation
- Tile options available for ease of transport and installation
- Safetred Transport range available for buses and coaches

TECHNICAL DATA	STANDARDS	Safetred									
		Design	Design LL	Design Acoustic	Ion Compact	Ion Loose Lay (LL)	Ion Acoustic	Spectrum	Universal	Universal Plus	Transport
Classification		Heterogeneous safety floorings									
Type of floor covering	EN 13845	Classes: 34 43									
Classification	EN 13845 commercial industrial										
Characteristics											
Total thickness	ISO 24346 (EN 428)	2.0mm	2.35mm	3.5mm	2.00mm	2.35mm	3.5mm	2.00mm	2.00mm	2.50mm	2.35mm
Total weight	ISO 23997 (EN 430)	3 340g/m ²	3 410g/m ²	3 750g/m ²	3 340g/m ²	3 410g/m ²	3 750g/m ²	3 230g/m ²	3 230g/m ²	3 850g/m ²	3 300g/m ²
Safety Clean XP™ PUR reinforcement	—	Yes									
Technical performance											
Abrasion	EN 13845 Annex D	≤10% particle loss after 50,000 cycles									
Residual indentation	Average measured value ISO 24343-1 (EN 433) requirement	≤ 0.10mm	0.15mm ≤ 0.20mm	0.15mm ≤ 0.10mm	≤ 0.10mm	≤ 0.11mm	0.15mm ≤ 0.20mm	≤ 0.10mm			
Furniture leg	EN 424	No damage									
Castor chair	ISO 4918 (EN 425)	No damage									
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40%									
Curl resistance to heat	ISO 23999 (EN 434)	≤ 2mm									
Reaction to fire	EN 13501-1	B _{fl} s1 on cement	C _{fl} s1 on cement	C _{fl} s1 on cement	B _{fl} s1 on cement	C _{fl} s1 on cement	C _{fl} s1 on cement	B _{fl} s1 on cement			
Slip resistance	TRRL Pendulum 4S (wet) BS 7976 part 2 DIN 51130 Surface Roughness Rz	> 36					R10		> 36	> 63	> 36
	EN 13893	≥ 0.3	≥ 0.3	≥ 0.3							
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL _w = 4dB	ΔL _w = 11dB	ΔL _w = 17dB	ΔL _w = 4dB	ΔL _w = 11dB	ΔL _w = 18dB	ΔL _w = 4dB	ΔL _w = 4dB	ΔL _w = 4dB	ΔL _w = 11dB
Electrical properties	EN 1815 EN 1081 EN 14041	< 2kV on concrete > 10 ⁹ Ω Antistatic on concrete	> 2kV on concrete > 10 ⁹ Ω Not antistatic on concrete	< 2kV on concrete > 10 ⁹ Ω Antistatic on concrete	> 2kV on concrete > 10 ⁹ ohms Not antistatic on concrete	< 2kV on concrete > 10 ⁹ Ω Antistatic on concrete	> 2kV on concrete > 10 ⁹ Ω Not antistatic on concrete	< 2kV on concrete > 10 ⁹ Ω Antistatic on concrete			
Light fastness	EN ISO 105-B02	7									
Chemical resistance	ISO 26987 (EN 423)	Good resistance to everyday substances									
Hygiene	—	Does not contribute to infection spreading									
Thermal resistance Underfloor heating	EN 12524	0.01m ² K/W Suitable - Max 27°C									
Form of delivery	ISO 24341 (EN 426) ISO 24342 (EN 427)	Rolls: 20lm x 2m (40m ²)	Rolls: 15lm x 2m (30m ²)	Rolls: 15lm x 2m (30m ²)	Rolls: 20lm x 2m (40m ²)	Rolls: 15lm x 2m (30m ²)	Rolls: 15lm x 2m (30m ²)	Rolls: 20lm x 2m (40m ²) Tiles: 50 x 50cm	Rolls: 20lm x 2m (40m ²)	Rolls: 15lm x 2m (30m ²)	Rolls: 15lm x 2m (30m ²)
Colours	—	Ceramic: 5 Wood: 10 Natural: 11	Ceramic: 5 Wood: 10 Natural: 11	Ceramic: 5 Wood: 10 Natural: 11	20	20*	20*	Rolls: 16 Tiles: 9	Rolls: 16	9	9

* Available on request.


The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

SAFETRED DESIGN

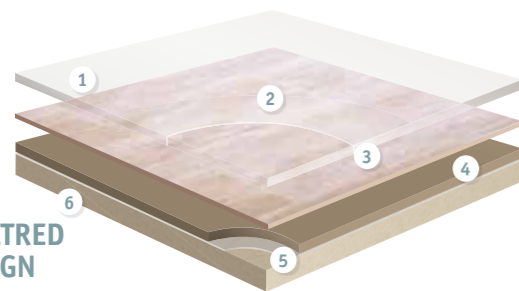


- Safety Clean XP Pur reinforced surface:** Excellent resistance to scuffing, soiling and staining, and easy maintenance
- Transparent wear layer**
- Pigmented wear layer/Class T. Optimum resistance to wear:** Aluminum oxide and/or carborundum extra hard particles: Sustainable slip resistance throughout product life, and enhanced abrasion and scratch resistance
- Compact calendared sheet:** Very high static point properties. Increased resistance to tear. Flexible and easy to install
- Glass fibre non woven reinforcement:** Unique dimensional stability and anti curl effect
- Impregnation coating**

SAFETRED ION

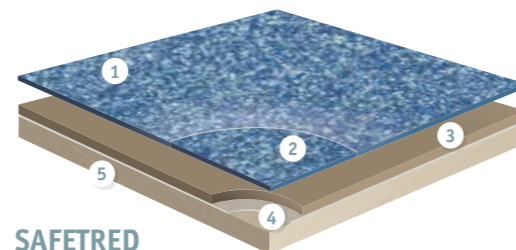

- Safety Clean XP Pur reinforced surface:** Excellent resistance to scuffing, soiling and staining, and easy maintenance
- Pigmented wear layer/Class T. Optimum resistance to wear:** Aluminum oxide: Sustainable slip resistance throughout product life, and enhanced abrasion and scratch resistance
- Compact calendared sheet:** Very high static point properties. Increased resistance to tear. Flexible and easy to install
- Glass fibre non woven reinforcement:** Unique dimensional stability and anti curl effect
- Impregnation coating**

SAFETRED UNIVERSAL, SPECTRUM & UNIVERSAL PLUS

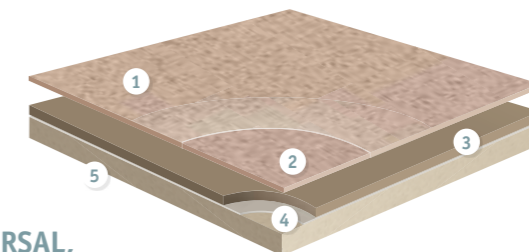

- Safety Clean XP™ Pur reinforced surface:** Excellent resistance to scuffing, soiling and staining, and easy maintenance
- Pigmented wear layer/Class T. Optimum resistance to wear:** Aluminum oxide and/or carborundum extra hard particles: Sustainable slip resistance throughout product life, and enhanced abrasion and scratch resistance
- Compact calendared sheet:** Very high static point properties. Increased resistance to tear. Flexible and easy to install
- Glass fibre non woven reinforcement:** Unique dimensional stability and anti curl effect
- Impregnation coating**

SAFETRED UNIVERSAL




Safetred Universal - Mercury



Quasar

3820 100
3879 100



Venus

3820 110
3879 110



Orion

3820 140
3879 140




Draco

3820 160
3879 160



Jupiter

3820 170
3879 170




Mercury

3820 180
3879 180




Constellation

3820 190
3879 190




Moon

3820 210
3879 210



Comet

3820 240
3879 240



Zodiac

3820 250
3879 250



Solar

3820 260
3879 260




Nebula

3820 270
3879 270




Pegasus

3820 280
3879 280



Pulsar

3820 290
3879 290



Neutron

3820 300
3879 300

TECHNICAL DATA	STANDARDS	Safetred Universal
Classification		
Type of floor covering	EN 13845	Heterogeneous safety floorings
Classification	EN 13845 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Total weight	ISO 23997 (EN 430)	3 230g/m ²
Safety Clean XP™ PUR reinforcement	—	Yes
Technical performance		
Abrasion	EN 13845 Annex D	≤10% particle loss after 50,000 cycles
Residual indentation	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 (EN 425)	No damage
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40%
Curl resistance to heat	ISO 23999 (EN 434)	≤ 2mm
Reaction to fire	EN 13501-1	B _s s1 on cement
Slip resistance	TRRL Pendulum 4S (wet) BS 7976 part 2 DIN 51130 Surface Roughness Rz	> 36 R10 > 20µm
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL _w = 4dB
Electrical resistance	EN 1815 EN 1081 EN 14041	< 2kV on concrete > 10 ⁹ ohms. Antistatic on concrete
Light fastness	EN ISO 105-B02	7
Chemical resistance	ISO 26987 (EN 423)	Good resistance to everyday substances
Hygiene	—	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN 12524	0.01m ² K/W Suitable - Max 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

SAFETRED UNIVERSAL

Main Product Features

- R10 slip resistance
- Safety Clean XP™ PUR reinforced surface for easy maintenance
- Flexible and easy to install
- Sustainable slip resistance throughout product life

Surface Treatment



Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 20lm

Laying direction:

Available in tiles

Laying direction:

General Information



SAFETRED UNIVERSAL PLUS



Safetred Universal Plus - Neutron




Quasar

3822 100




Nebula

3822 270




Mercury

3822 180



Venus

3822 110



Moon

3822 210




Jupiter

3822 170



Pegasus

3822 280



Neutron

3822 300

TECHNICAL DATA	STANDARDS	Safetred Universal Plus
Classification		
Type of floor covering	EN 13845	Heterogeneous safety floorings
Classification	EN 13845 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.50mm
Total weight	ISO 23997 (EN 430)	3 850g/m ²
Safety Clean XP™ PUR reinforcement	—	Yes
Technical performance		
Abrasion	EN 13845 Annex D	≤10% particle loss after 50,000 cycles
Residual indentation	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 (EN 425)	No damage
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40%
Curl resistance to heat	ISO 23999 (EN 434)	≤ 2mm
Reaction to fire	EN 13501-1	B _f s1 on cement
Slip resistance	TRRL Pendulum 4S (wet) BS 7976 part 2 DIN 51130 Surface Roughness Rz	> 45 R11 ≥ 35µm
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL _w = 4dB
Electrical resistance	EN 1815 EN 1081 EN 14041	< 2kV on concrete > 10 ⁹ ohms. Antistatic on concrete
Light fastness	EN ISO 105-B02	7
Chemical resistance	ISO 26987 (EN 423)	Good resistance to everyday substances
Hygiene	—	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN 12524	0.01m ² K/W Suitable - Max 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.



Constellation

3822 190

SAFETRED UNIVERSAL PLUS


Main Product Features

- Heterogeneous floorcovering
- High level of slip resistance (R11)
- Sustainable slip resistance throughout the product life
- Safety Clean XP™ PUR reinforced surface for easy maintenance
- For demanding locations where toughness and safety are paramount

Surface Treatment



Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 15lm

Laying direction:

General Information























SAFETRED WOOD























Wood - Traditional Light Oak























Traditional Oak

				
Light	Natural	Brown	Dark	Grey White
 4676 001	 4676 002	 4676 003	 4676 004	 4676 011
 26752 001	 26752 002	 26752 003	 26752 004	 26752 011
 26753 001	 26753 002	 26753 003	 26753 004	 26753 011

Trend Oak

				
Middle Natural	Mid Grey	Warm	Brown	Natural
 4676 012	 4676 013	 4676 014	 4676 005	 4676 006
 26752 012	 26752 013	 26752 014	 26752 005	 26752 006
 26753 012	 26753 013	 26753 014	 26753 005	 26753 006

Beech




				
White	Steel Grey	Smart Walnut	Beech Light	Beech Natural
 4676 007	 4676 015	 4676 016	 4676 008	 4676 009
 26752 007	 26752 015	 26752 016	 26752 008	 26752 009
 26753 007	 26753 015	 26753 016	 26753 008	 26753 009

TECHNICAL DATA	STANDARDS	Safetred		
		Design	Design LL	Design Acoustic
Classification				
Type of floor covering	EN 13845	Heterogeneous safety floorings		
Classification	EN 13845 commercial industrial	Classes: 34 43	Classes: 34 43	Classes: 34 43
Characteristics				
Total thickness	ISO 24346 (EN 428)	2.0mm	2.35mm	3.5mm
Total weight	ISO 23997 (EN 430)	3 340g/m ²	3 410g/m ²	3 750g/m ²
Safety Clean XP™ PUR reinforcement	—	Yes		
Technical performance				
Abrasion	EN 13845 Annex D	≤10% particle loss after 50,000 cycles		
Residual indentation	Average measured value	≤ 0.10mm		0.15mm
	ISO 24343-1 (EN 433) requirement			≤ 0.20mm
Furniture leg	EN 424	No damage		
Castor chair	ISO 4918 (EN 425)	No damage		
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40%		
Curl resistance to heat	ISO 23999 (EN 434)	≤ 2mm		
Reaction to fire	EN 13501-1	B _{s1} on cement	C _{s1} on cement	C _{s1} on cement
		Slip resistance		
Slip resistance	TRRL Pendulum 4S (wet) BS 7976 part 2 DIN 51130	> 36		R10
	Surface Roughness Rz EN 13893	≥ 20µm		≥ 0.3
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL _w = 4dB	ΔL _w = 11dB	ΔL _w = 17dB
		Electrical resistance		
Electrical resistance	EN 1815 EN 1081 EN 14041	< 2kV on concrete		> 2kV on concrete
		> 10 ⁹ ohms. Antistatic on concrete		> 10 ⁹ ohms Not antistatic on concrete
Light fastness	EN ISO 105-B02	7		
Chemical resistance	ISO 26987 (EN 423)	Good resistance to everyday substances		
Hygiene	—	Does not contribute to infection spreading		
Thermal resistance Underfloor heating	EN 12524	0.01m ² K/W - Max 27°C (Typical values)		

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

Traditional Oak



-  4676 010
-  26752 010
-  26753 010

General Information

Safetred Design
0170-0008-DoP-2015-08
<http://professionals.tarkett.com>
Manufactured by: Tarkett Ltd
Lenham ME17 2DX, England
EN 14041:2004

Safetred Design LL
0170-0007-DoP-2015-08
<http://professionals.tarkett.com>
Manufactured by: Tarkett Ltd
Lenham ME17 2DX, England
EN 14041:2004

Safetred Design Acoustic
0170-0010-DoP-2015-08
<http://professionals.tarkett.com>
Manufactured by: Tarkett Ltd
Lenham ME17 2DX, England
EN 14041:2004

Main Product Features

- R10 slip resistance, sustainable through product life
- Designed not to look like a safety floor: wide offer of wood designs
- New Safetred Design Loose-Lay (LL) option: ideal for refurbishments projects
- New Safetred Design Acoustic option: 17dB sound reduction
- Safety Clean XP™ PUR reinforced surface for improved stain resistance and easy maintenance

Surface Treatment



Sustainability Tag

Safetred Design

100% Recyclable Recycled content
40% Recycled content

PHTHALATE FREE Technology

Better Indoor Air Quality
~100µg/m³
*TVOC AT 28 DAYS

Restart Ready

Safetred Design LL

100% Recyclable Recycled content
40% Recycled content

PHTHALATE FREE Technology

Better Indoor Air Quality
~100µg/m³
*TVOC AT 28 DAYS

Restart Ready

Safetred Design Acoustic

100% Recyclable Recycled content
36% Recycled content

PHTHALATE FREE Technology

Better Indoor Air Quality
~100µg/m³
*TVOC AT 28 DAYS

Restart Ready


Logistics Information

Safetred Design
Available in rolls
Rolls length: 20lm

Safetred Design LL
Available in rolls
Rolls length: 15lm

Safetred Design Acoustic
Available in rolls
Rolls length: 15lm

Laying direction:



Wood

SAFETRED CERAMIC & NATURAL



Ceramic - Cottage Stone Black



Ceramic

Cottage Stone Beige	Cottage Stone Black	Melbourne Beige	Melbourne Brown	Melbourne Grey Brown
<ul style="list-style-type: none"> 26756 011 26750 011 26757 011 	<ul style="list-style-type: none"> 26756 012 26750 012 26757 012 	<ul style="list-style-type: none"> 26756 008 26750 008 26757 008 	<ul style="list-style-type: none"> 26756 009 26750 009 26757 009 	<ul style="list-style-type: none"> 26756 010 26750 010 26757 010

Natural

Linen	Lime Stone	Earth	Pearl	Smoke
<ul style="list-style-type: none"> 4677 001 26754 001 26755 001 	<ul style="list-style-type: none"> 4677 002 26754 002 26755 002 	<ul style="list-style-type: none"> 4677 003 26754 003 26755 003 	<ul style="list-style-type: none"> 4677 004 26754 004 26755 004 	<ul style="list-style-type: none"> 4677 005 26754 005 26755 005
Pewter	Anthracite	Mist	Dark Blue	
<ul style="list-style-type: none"> 4677 006 26750 006 26757 006 	<ul style="list-style-type: none"> 4677 007 26750 007 26757 007 	<ul style="list-style-type: none"> 4677 008 26750 008 26757 008 	<ul style="list-style-type: none"> 4677 010 26750 010 26757 010 	

TECHNICAL DATA	STANDARDS	Safetred		
		Design	Design LL	Design Acoustic
Classification				
Type of floor covering	EN 13845	Heterogeneous safety floorings		
Classification	EN 13845 commercial industrial	Classes: 34 43	Classes: 34 43	Classes: 34 43
Characteristics				
Total thickness	ISO 24346 (EN 428)	2.0mm	2.35mm	3.5mm
Total weight	ISO 23997 (EN 430)	3 340g/m ²	3 410g/m ²	3 750g/m ²
Safety Clean XP™ PUR reinforcement	—	Yes		
Technical performance				
Abrasion	EN 13845 Annex D	≤10% particle loss after 50,000 cycles		
Residual indentation	Average measured value	≤ 0.10mm		0.15mm
	ISO 24343-1 (EN 433) requirement			≤ 0.20mm
Furniture leg	EN 424	No damage		
Castor chair	ISO 4918 (EN 425)	No damage		
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40%		
Curl resistance to heat	ISO 23999 (EN 434)	≤ 2mm		
Reaction to fire	EN 13501-1	B _n s1 on cement	C _n s1 on cement	C _n s1 on cement
Slip resistance	TRRL Pendulum 4S (wet) BS 7976 part 2 DIN 51130 Surface Roughness Rz EN 13893	> 36		R10 > 20µm ≥ 0.3
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL _w = 4dB	ΔL _w = 11dB	ΔL _w = 17dB
Electrical resistance	EN 1815 EN 1081 EN 14041	< 2kV on concrete > 10 ⁹ ohms. Antistatic on concrete		> 2kV on concrete > 10 ⁹ ohms Not antistatic on concrete
Light fastness	EN ISO 105-B02	7		
Chemical resistance	ISO 26987 (EN 423)	Good resistance to everyday substances		
Hygiene	—	Does not contribute to infection spreading		
Thermal resistance Underfloor heating	EN 12524	0.01m ² K/W Suitable - Max 27°C		

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.



Steel

- 4677 009
- 26754 009
- 26755 009



Grey Beige

- 4677 011
- 26750 011
- 26757 011

General Information



Main Product Features

- R10 slip resistance, sustainable through product life
- Designed not to look like a safety floor: wide offer of ceramic and natural designs
- New Safetred Design Loose-Lay (LL) option: ideal for refurbishments projects
- New Safetred Design Acoustic option: 17dB sound reduction
- Safety Clean XP™ PUR reinforced surface for improved stain resistance and easy maintenance

Surface Treatment



Sustainability Tag

Safetred Design

--	--	--	--

Safetred Design LL

--	--	--	--

Safetred Design Acoustic

--	--	--	--


Logistics Information

Safetred Design
 Available in rolls
 Rolls length: 20lm

Safetred Design LL
 Available in rolls
 Rolls length: 15lm

Safetred Design Acoustic
 Available in rolls
 Rolls length: 15lm

Laying direction:























































Ceramic Natural

SAFETRED ION LINEN



Linen Dark Blue



				
Midnight	Charcoal	Chocolate	Rust	Titanium
 26763 004  26764 004*  26765 004*	 26763 005  26764 005*  26765 005*	 26763 015  26764 015*  26765 015*	 26763 001  26764 001*  26765 001*	 26763 009  26764 009*  26765 009*
				
Mid Grey	Steel	Latte	Sand	Light Grey
 26763 006  26764 006*  26765 006*	 26763 008  26764 008*  26765 008*	 26763 014  26764 014*  26765 014*	 26763 013  26764 013*  26765 013*	 26763 007  26764 007*  26765 007*
				
Mint	Sky Blue	Dark Blue		
 26763 011  26764 011*  26765 011*	 26763 012  26764 012*  26765 012*	 26763 003  26764 003*  26765 003*		

* On demand - Minimum 2 rolls

TECHNICAL DATA	STANDARDS	Safetred		
		Ion Compact	Ion Loose Lay (LL)	Ion Acoustic
Classification				
Type of floor covering	EN 13845	Heterogeneous safety floorings		
Classification	EN 13845 commercial industrial	Classes: 34 43		
Characteristics				
Total thickness	ISO 24346 (EN 428)	2.00mm	2.35mm	3.5mm
Total weight	ISO 23997 (EN 430)	3 410g/m ²	3 410g/m ²	3 750g/m ²
Safety Clean XP™ PUR reinforcement	—	Yes		
Technical performance				
Abrasion	EN 13845 Annex D	≤10% particle loss after 50,000 cycles		
Residual indentation	Average measured value			0.15mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	≤ 0.11mm	≤ 0.20mm
Furniture leg	EN 424	No damage		
Castor chair	ISO 4918 (EN 425)	No damage		
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40%		
Curly resistance to heat	ISO 23999 (EN 434)	≤ 2mm		
Reaction to fire	EN 13501-1	B _{s1} on cement	C _{s1} on cement	C _{s1} on cement
Slip resistance	TRRL Pendulum 4S (wet) BS 7976 part 2	> 36		
	DIN 51130 Surface Roughness Rz	R10 > 20µm		
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL _w = 4dB	ΔL _w = 11dB	ΔL _w = 18dB
Electrical resistance	EN 1815 EN 1081 EN 14041	< 2kV on concrete > 10 ⁹ ohms. Antistatic on concrete		> 2kV on concrete > 10 ⁹ ohms Not antistatic on concrete
Light fastness	EN ISO 105-B02	7		
Chemical resistance	ISO 26987 (EN 423)	Good resistance to everyday substances		
Hygiene	—	Does not contribute to infection spreading		
Thermal resistance Underfloor heating	EN 12524	0.01m ² K/W Suitable - Max 27°C		
Form of delivery	ISO 24341 (EN 426) ISO 24342 (EN 427)	Rolls: 20lm x 2m (40m ²)	Rolls: 15lm x 2m (30m ²)	Rolls: 15lm x 2m (30m ²)
Colours	—	20	20*	20*

* Available on request.

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information please contact Tarkett. Follow Tarkett's installation and maintenance instruction carefully, available on request.



Heather

General Information

	Safetred Ion Linen Compact 0170-0011-DoP-2014-07 http://professionals.tarkett.com Manufactured by: Tarkett Ltd, Dickley Lane, Lasham, Maidstone, Kent, ME17 2JX England
	Safetred Ion Linen LL 0170-0012-DoP-2014-08 http://professionals.tarkett.com Manufactured by: Tarkett Ltd, Dickley Lane, Lasham, Maidstone, Kent, ME17 2JX England
	Safetred Ion Linen Acoustic 0170-0013-DoP-2014-08 http://professionals.tarkett.com Manufactured by: Tarkett Ltd, Dickley Lane, Lasham, Maidstone, Kent, ME17 2JX England



According to European Classification EN 13845

SAFETRED ION Linen

Main Product Features

- Sustainable slip resistance throughout the product life
- Safety Clean XP™ PUR reinforced surface for improved stain resistance and ease of maintenance
- Extremely low VOCs contributing to better interior air quality
- Phthalate free

Surface Treatment



Sustainability Tag

Safetred Ion Linen Compact				
Safetred Ion Linen LL				
Safetred Ion Linen Acoustic				

Logistics Information

- Safetred Ion Compact**
Available in rolls
Rolls length: 20lm
- Safetred Ion LL**
Available in rolls
Rolls length: 15lm
- Safetred Ion Acoustic**
Available in rolls
Rolls length: 15lm

Laying direction:



Wood

SAFETRED ION CONTRAST



Contrast Dark Blue




Light Grey

26766 007
26767 007*
26768 007*




Mid Grey

26766 006
26767 006*
26768 006*



Charcoal

26766 005
26767 005*
26768 005*

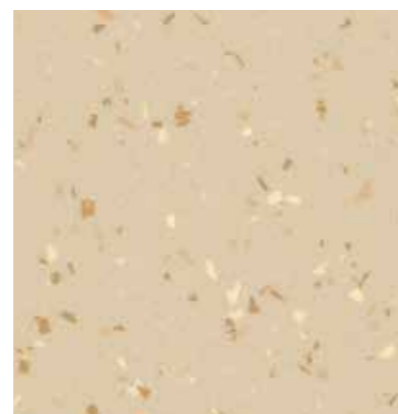


Latte

26766 014
26767 014*
26768 014*



Midnight

26766 004
26767 004*
26768 004*



Dark Blue

26766 003
26767 003*
26768 003*

* On demand - Minimum 2 rolls

TECHNICAL DATA	STANDARDS	Safetred		
		Ion Compact	Ion Loose Lay (LL)	Ion Acoustic
Classification				
Type of floor covering	EN 13845	Heterogeneous compact vinyl		
Classification	EN 13845 commercial industrial	Classes: 34 43		
Characteristics				
Total thickness	ISO 24346 (EN 428)	2.00mm	2.35mm	3.5mm
Total weight	ISO 23997 (EN 430)	3 340g/m ²	3 410g/m ²	3 750g/m ²
Safety Clean XP™ PUR reinforcement	—	Yes		
Technical performance				
Abrasion	EN 13845 Annex D	≤10% particle loss after 50,000 cycles		
Residual indentation	Average measured value			0.15mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	≤ 0.11mm	≤ 0.20mm
Furniture leg	EN 424	No damage		
Castor chair	ISO 4918 (EN 425)	No damage		
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40%		
Curl resistance to heat	ISO 23999 (EN 434)	≤ 2mm		
Reaction to fire	EN 13501-1	B _{fs} 1 on cement	C _{fs} 1 on cement	C _{fs} 1 on cement
Slip resistance	TRRL Pendulum 4S (wet) BS 7976 part 2	> 36		
	DIN 51130 Surface Roughness Rz	R10 > 20µm		
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL _w = 4dB	ΔL _w = 11dB	ΔL _w = 18dB
Electrical resistance	EN 1815 EN 1081 EN 14041	< 2kV on concrete > 10 ⁹ ohms. Antistatic on concrete		> 2kV on concrete > 10 ⁹ ohms Not antistatic on concrete
Light fastness	EN ISO 105-B02	7		
Chemical resistance	ISO 26987 (EN 423)	Good resistance to everyday substances		
Hygiene	—	Does not contribute to infection spreading		
Thermal resistance Underfloor heating	EN 12524	0.01m ² K/W Suitable - Max 27°C		
Form of delivery	ISO 24341 (EN 426) ISO 24342 (EN 427)	Rolls: 20lm x 2m (40m ²)	Rolls: 15lm x 2m (30m ²)	Rolls: 15lm x 2m (30m ²)
Colours	—	20	20*	20*

* Available on request.

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information please contact Tarkett. Follow Tarkett's installation and maintenance instruction carefully, available on request.

General Information




Safetred Ion Contrast Compact
0170-0014-BoP-2014-08
<http://professionals.tarkett.com>
Manufactured by:
Tarkett Ltd, Dickey Lane, Lenham, Maidstone, Kent, ME17 2JQ England
EN 14041:2004



Safetred Ion Contrast LL
0170-0015-BoP-2014-07
<http://professionals.tarkett.com>
Manufactured by:
Tarkett Ltd, Dickey Lane, Lenham, Maidstone, Kent, ME17 2JQ England
EN 14041:2004



Safetred Ion Contrast Acoustic
0170-0016-BoP-2014-07
<http://professionals.tarkett.com>
Manufactured by:
Tarkett Ltd, Dickey Lane, Lenham, Maidstone, Kent, ME17 2JQ England
EN 14041:2004



According to European Classification EN 13845

SAFETRED ION Contrast

Main Product Features

- Sustainable slip resistance throughout the product life
- Safety Clean XP™ PUR reinforced surface for improved stain resistance and ease of maintenance
- Extremely low VOCs contributing to better interior air quality
- Phthalate free

Surface Treatment




Sustainability Tag

Safetred Ion



Safetred Ion LL



Safetred Ion Acoustic



Logistics Information

Safetred Ion Compact

Available in rolls
Rolls length: 20lm

Safetred Ion LL

Available in rolls
Rolls length: 15lm

Safetred Ion Acoustic

Available in rolls
Rolls length: 15lm


Laying direction:



SAFETRED SPECTRUM



Safetred Spectrum
Riviera / Silver

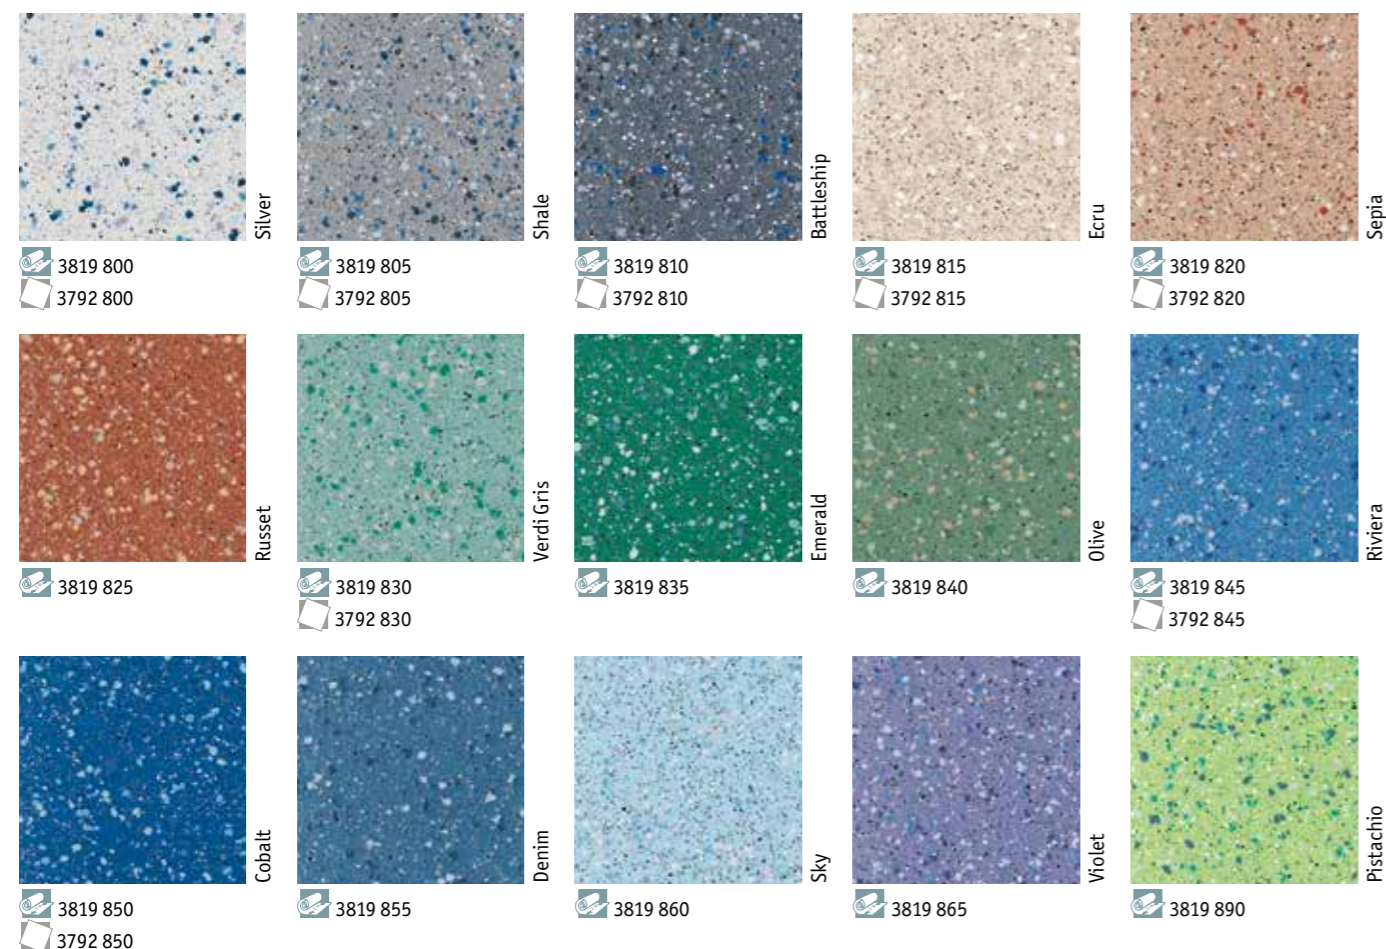

TECHNICAL DATA	STANDARDS	Safetred Spectrum
Classification		
Type of floor covering	EN 13845	Heterogeneous safety floorings
Classification	EN 13845 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Total weight	ISO 23997 (EN 430)	3 230g/m ²
Safety Clean XP™ PUR reinforcement	—	Yes
Technical performance		
Abrasion	EN 13845 Annex D	≤10% particle loss after 50,000 cycles
Residual indentation	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 (EN 425)	No damage
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40%
Curl resistance to heat	ISO 23999 (EN 434)	≤ 2mm
Reaction to fire	EN 13501-1	B _{s1} on cement
Slip resistance	TRRL Pendulum 4S (wet) BS 7976 part 2 DIN 51130 Surface Roughness Rz	> 36 R10 > 20µm
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL _w = 4dB
Electrical resistance	EN 1815 EN 1081 EN 14041	< 2kV on concrete > 10 ⁹ ohms. Antistatic on concrete
Light fastness	EN ISO 105-B02	7
Chemical resistance	ISO 26987 (EN 423)	Good resistance to everyday substances
Hygiene	—	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN 12524	0.01m ² K/W Suitable - Max 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.



3819 895
3792 895

SAFETRED SPECTRUM

Main Product Features

- Heavy duty general purpose for domestic and commercial areas
- R10 slip resistance
- Mix and match designs in rolls and tiles
- More flexibility with tiles (50 x 50cm) with excellent dimensional stability without welding
- Safety Clean XP™ PUR reinforced surface for easy maintenance
- Sustainable slip resistance throughout product life

Surface Treatment




Sustainability Tag




Logistics Information


Available in rolls
Rolls length: 20m

Laying direction: 

Available in tiles

Laying direction: 

General Information



According to European Classification EN 13845



TECHNICAL DATA	STANDARDS	Granit Safe.T	Primo Safe.T
Classification			
Type of Floor covering	EN 13485	Homogeneous compact vinyl	Homogeneous compact vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43	Classes: 34 43
Characteristics			
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	2.00mm
Total thickness	ISO 24346 (EN 428)	2.00mm	2.00mm
Total weight	ISO 23997 (EN 430)	2 950g/m ²	3 000g/m ²
Wear layer reinforcement	—	Safe.T Clean	Safe.T Clean
Technical performance			
Residual indentation	Best measured value	0.02mm	0.03 mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	≤ 0.10mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B _{fl} s1 ≥ 8kW/m ² Pass	B _{fl} s1 ≥ 8kW/m ² Pass
Slip resistance	DIN 51130 EN 13893	R10 ≥ 0.3	R10 ≥ 0.3
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40%	≤ 0.40%
Castor chair test	ISO 4918 (EN 425)	Suitable	Suitable
Chemical resistance	ISO 26987 (EN 423)	Good resistance	Good resistance
Fungi and bacteria resistance	DIN EN 846-A/C	Does not favour growth	Does not favour growth
Thermal resistance Underfloor heating	EN ISO 10456	0.01m ² K/W Suitable - Max 27°C	0.01m ² K/W Suitable - Max 27°C
Light fastness	EN ISO 105-B02	> 7	≥ 6
Bare foot test	DIN 51097	Class B (≥ 18°)	Class B (≥ 18°)
Static electrical charge	EN 1815	< 2kV	< 2kV
Form of delivery			
Form of delivery	ISO 24341 (EN 426) ISO 24342 (EN 427)	Rolls: 25lm x 2m	Rolls: 23lm x 2m
Colours			
Colours	—	16	18

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.



FUNCTIONAL BENEFITS

- Matching designs with Tarkett iQ Granit, Primo Premium and Eclipse Premium ranges
- Coordinated accessories for a perfect finish
- Exceptional and durable slip resistance (R10)
- Reinforced surfaces for easy maintenance
- Easy to install
- Unrivalled indoor air quality
- Reduced carbon footprint

Homogeneous
vinyl safety floorings
for all uses

GRANIT SAFE.T PRIMO SAFE.T


Homogeneous vinyl flooring with
Safety Clean XP™ surface treatment:
better slip resistance



PRIMO SAFE.T



Primo Safe.T - 21013 793

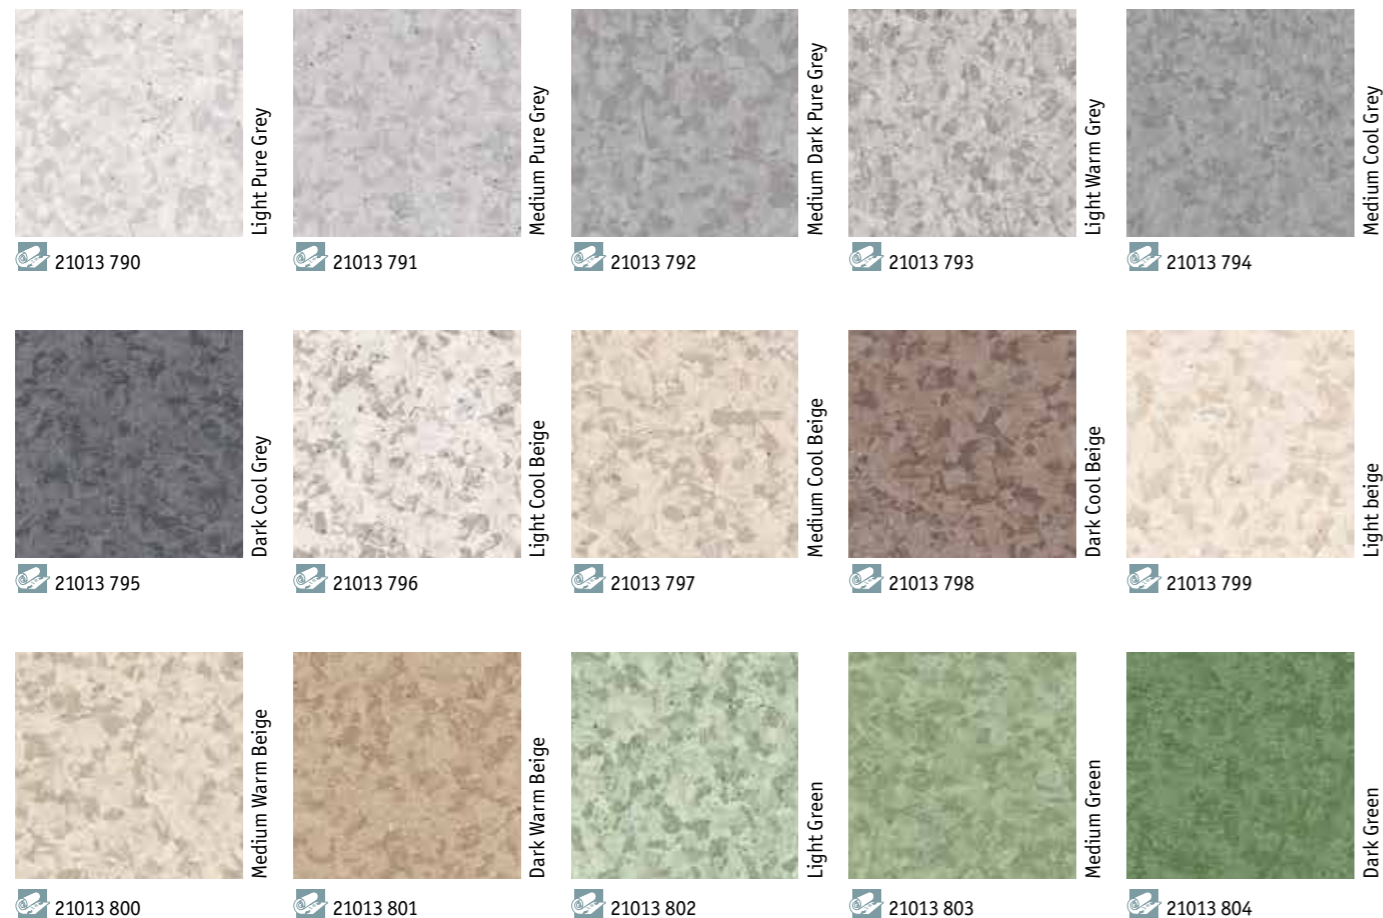

TECHNICAL DATA	STANDARDS	Primo Safe.T
Classification		
Type of Floor covering	EN 13485	Homogeneous compact vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
Characteristics		
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total thickness	ISO 24346 (EN 428)	2.00mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²
Wear layer reinforcement	—	Safe.T Clean
Technical performance		
Residual indentation	Best measured value	0.03mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B _s s1 ≥ 8kW/m ² Pass
Slip resistance	DIN 51130 EN 13893	R10 ≥ 0.3
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40%
Castor chair test	ISO 4918 (EN 425)	Suitable
Chemical resistance	ISO 26987 (EN 423)	Good resistance
Fungi and bacteria resistance	DIN EN 846-A/C	Does not favour growth
Thermal resistance Underfloor heating	EN ISO 10456	0.01m ² K/W Suitable - Max 27°C
Light fastness	EN ISO 105-B02	≥ 6
Bare foot test	DIN 51097	Class B (≥ 18°)
Static electrical charge	EN 1815	< 2kV

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

PRIMO SAFE.T

Main Product Features

- Excellent slip resistance properties
- 2mm wear layer for extreme durability
- Approved also for wetrooms

Surface Treatment



Sustainability Tag



Logistics Information




Available in rolls
Rolls length: 25ml

Laying direction:



General Information

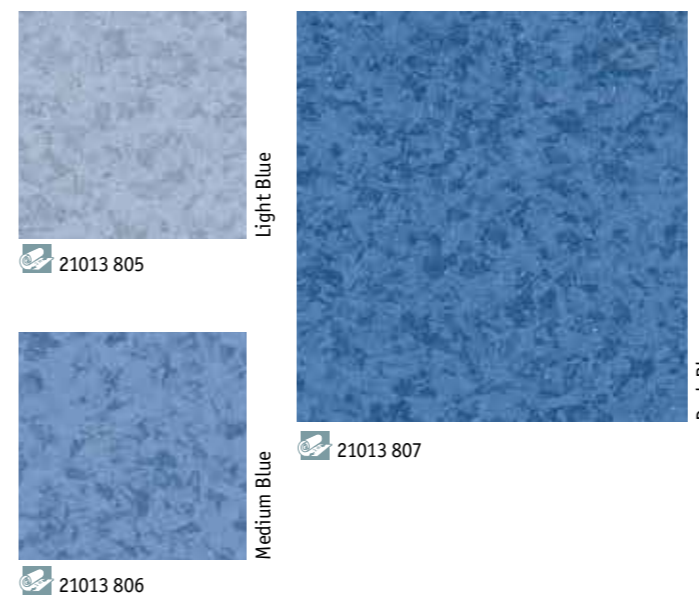

21013 806

GRANIT SAFE.T



Granit Safe.T - 3052 702



3052 690



3052 691



3052 692



3052 693



3052 694



3052 695



3052 696



3052 697



3052 698



3052 699



3052 700



3052 702



3052 703




3052 704



3052 705

TECHNICAL DATA	STANDARDS	Granit Safe.T
Classification		
Type of Floor covering	EN 13485	Homogeneous compact vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
Characteristics		
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total thickness	ISO 24346 (EN 428)	2.00mm
Total weight	ISO 23997 (EN 430)	2 950g/m ²
Wear layer reinforcement	—	Safe.T Clean
Technical performance		
Residual indentation	Best measured value	0.02mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B _s s1 ≥ 8kW/m ² Pass
Slip resistance	DIN 51130 EN 13893	R10 ≥ 0.3
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40%
Castor chair test	ISO 4918 (EN 425)	Suitable
Chemical resistance	ISO 26987 (EN 423)	Good resistance
Fungi and bacteria resistance	DIN EN 846-A/C	Does not favour growth
Thermal resistance Underfloor heating	EN ISO 10456	0.01m ² K/W Suitable - Max 27°C
Light fastness	EN ISO 105-B02	> 7
Bare foot test	DIN 51097	Class B (≥ 18°)
Static electrical charge	EN 1815	< 2kV

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

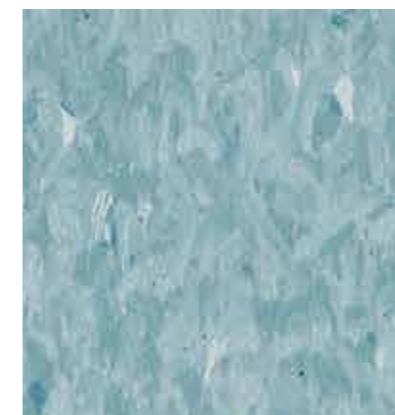

3052 706

GRANIT SAFE.T

Main Product Features

- Excellent slip resistance properties
- 2mm wear layer for extreme durability
- Approved also for wetrooms

Surface Treatment




Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 25ml



General Information



SAFETRED TRANSPORT



TECHNICAL DATA	STANDARDS	Safetred Transport
Classification		
Type of floor covering	EN 13845	Heterogeneous safety floorings
Classification	Non applicable	Non applicable
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.35mm
Total weight	ISO 23997 (EN 430)	3 300g/m ²
Safety Clean XP™ PUR reinforcement	—	Yes
Technical performance		
Abrasion	EN 13845 Annex D	≤10% particle loss after 50,000 cycles
Residual indentation	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40%
Curl resistance to heat	ISO 23999 (EN 434)	≤ 2mm
Flame and smoke	Regulation ECE No. 118-02 (Annex 6 and Annex 8)	PASS
Slip resistance	TRRL Pendulum 4S (wet) BS 7976 part 2 DIN 51130 Surface Roughness Rz	> 36 R10 Esf > 20µm
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2 NF S 31-074 L _{n,w}	ΔL _w = 11dB 70dB
Light fastness	EN ISO 105-B02	7
Chemical resistance	ISO 26987 (EN 423)	Good resistance to everyday substances
Hygiene	—	Does not contribute to infection spreading

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

SAFETRED TRANSPORT

Main Product Features

- High level of slip resistance
- Sustainable slip resistance throughout the product life
- Fleece backing for improved adhesion bond
- Hardwearing and durable for demanding environments
- Safety Clean XP™ PUR reinforced surface

Surface Treatment




Sustainability Tag



Logistics Information


Available in rolls
Rolls length: 15lm

Laying direction:




Shale

3794 805




Battleship

3794 810




Sepia

3794 820



Riviera

3794 845




Cobalt

3794 850




Quasar

3793 100



Mercury

3793 180



Constellation


3793 190



Solar

3793 260

OUR SELECTION OF ACCESSORIES FOR SAFETY SOLUTIONS

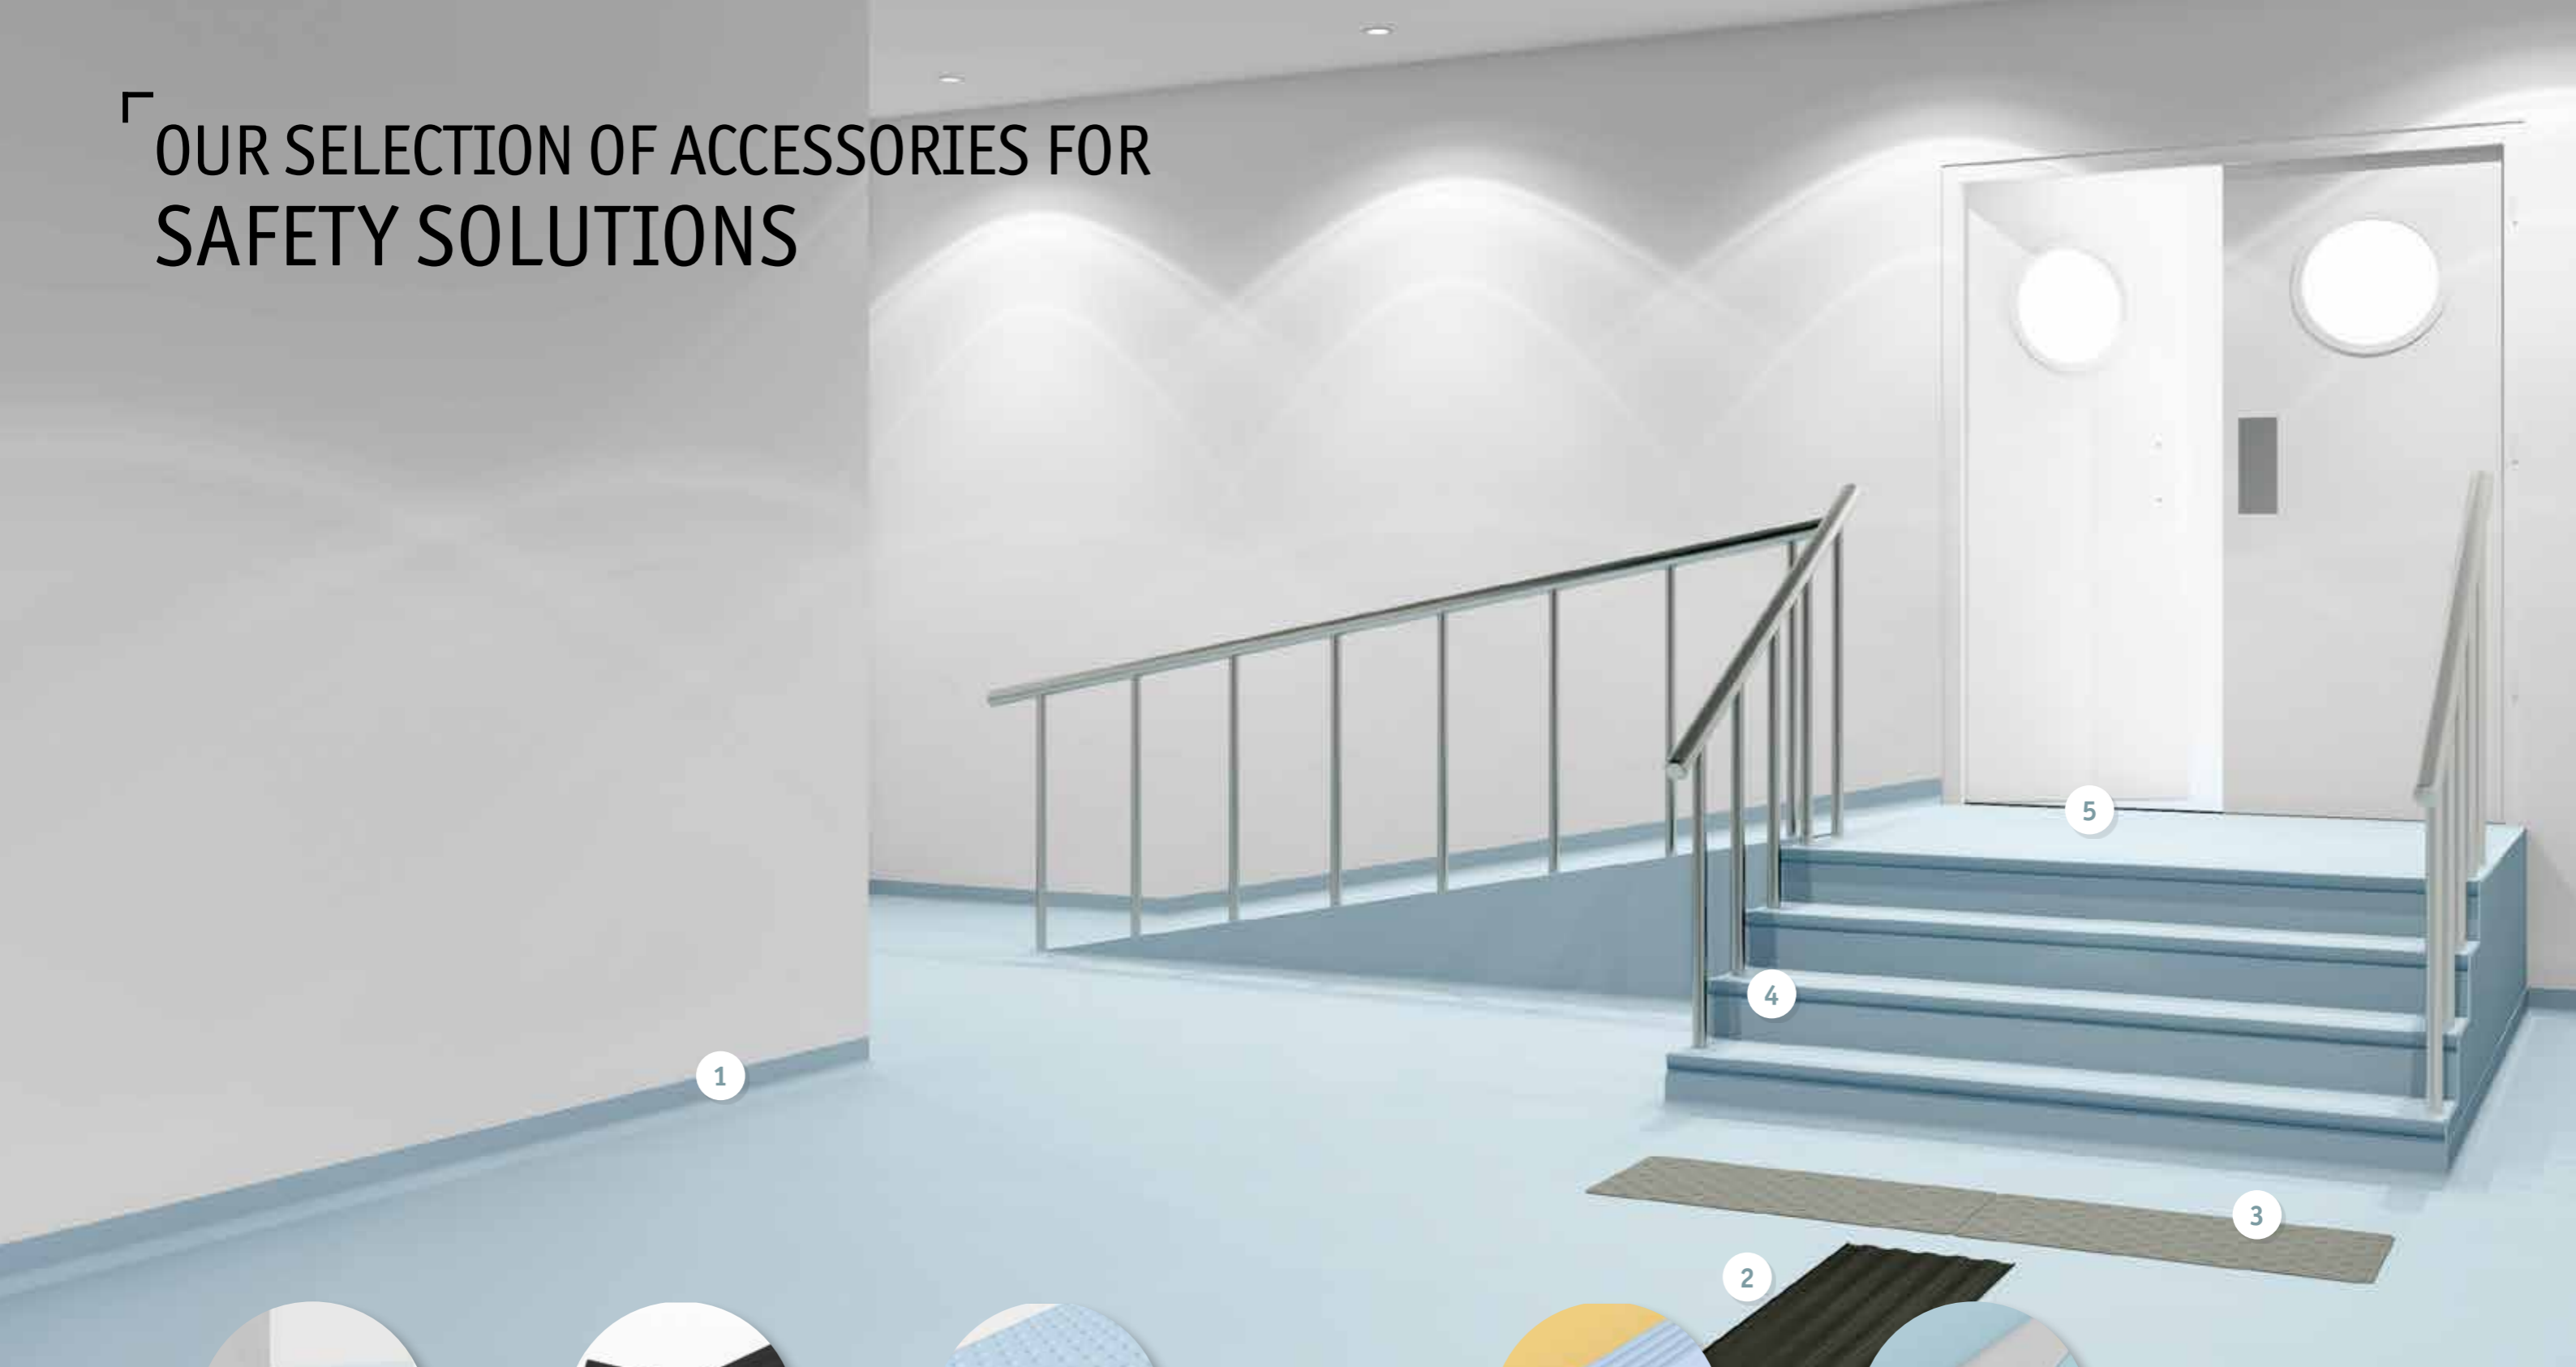

1

Cove former

PA20

Improves hygiene inside wall corner and makes maintenance easier.

See p. 540 for detailed info




2

Tactile guide

Specially designed for visually impaired people to help finding their way with blind stick.

See p. 555 for detailed info




3

Warning tile

Helps recognize a change in level for visually impaired people, in accordance with regulatory requirements.

See p. 554 for detailed info




4

Stair nosing

NM1

Flexible PVC stair nosing. Cut to size on site and fixed with adhesive before floor covering.

See p. 552 for detailed info



5

Transition profile

TTP

Transition strip used to join different floorings of the same or slightly different heights.

See p. 548 for detailed info