



LUXURY VINYL TILES

HEAVY TRAFFIC

LVT Glue-Down

iD Mixonomi	p. 220
iD Supernature & Tattoo	p. 222
iD Inspiration 55-70	p. 234
iD Inspiration 40	p. 242

LVT Click

iD Click Ultimate	p. 260
iD Inspiration Click ^{PLUS}	p. 262
iD Inspiration Click	p. 266

LVT Loose-lay

iD Inspiration Loose-lay	p. 272
iD TILT	p. 276
iD Square	p. 278

LIGHT & MODERATE TRAFFIC

LVT Glue-Down

iD Essential	p. 286
--------------	--------

LVT Click

iD Essential Click	p. 294
--------------------	--------



OUR SELECTION OF ACCESSORIES FOR LUXURY VINYL TILES



1

Floorcraft

Selection of designs to be inserted into any floor area.

See p. 590 for detailed info



2

Flexible ramp profile

FT5
Bendable aluminium profile to join different profiles and fit shape.

See p. 575 for detailed info



3

Feature strips

Create visual effects with contrasts of colour between planks.

See p. 569 for detailed info



4

Transition profile

MT40SA
Self-adhesive aluminium profile used at doorstep to join different floorings.

See p. 573 for detailed info



5

LVT set-on skirting

PVC skirting with decorative film for perfect matching.

See p. 570 for detailed info



6

Set-on skirting

Insert your flooring into the skirting for perfect colour matching.

See p. 567 for detailed info

Other available accessories

- Stair noise
See p. 576 for detailed info
- Acoustic underlayer
See p. 586 for detailed info
- Studs
See p. 579 for detailed info




LUXURY VINYL TILES



LVT: the iD range offers a global concept made of a large choice of designs and colors available in various dimensions and technologies.

Tarkett LVT collections have been developed to be combined with an extensive range of accessories and services to meet end-users sensorial, functional & environmental needs (100% phtalate-free, recyclable and low VOC).

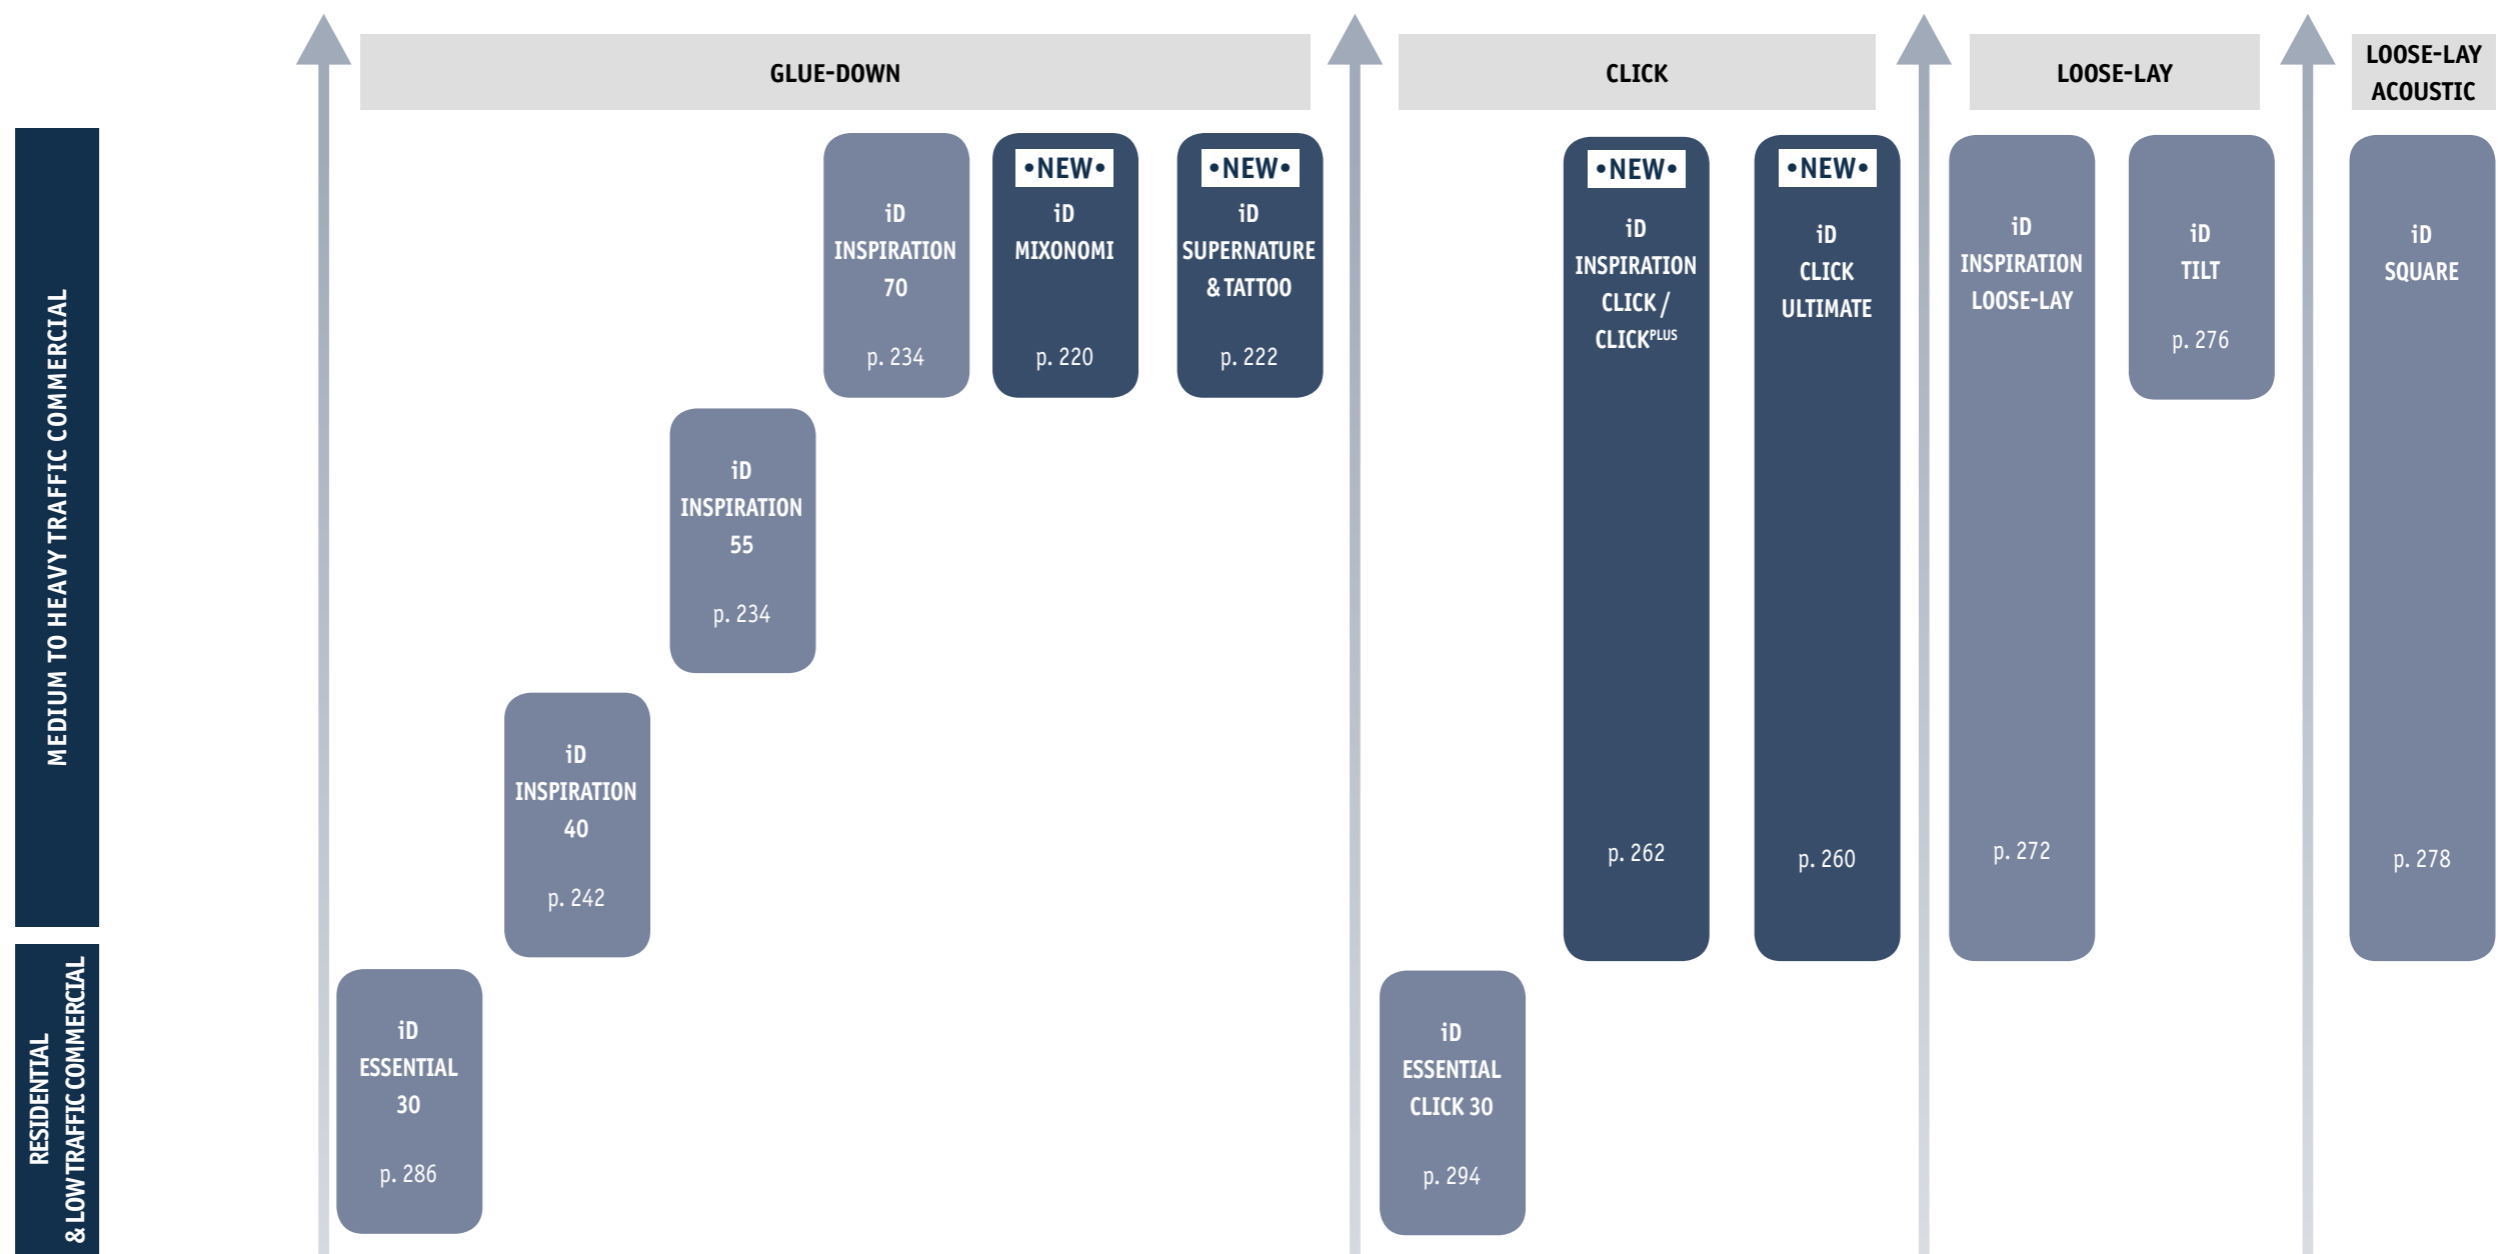

Class	23/31	23/32	33/42	34/43	34/43	34/43	23/31	33/42	34/43	33/42	34/43	34	
Surface Treatment	TOPCLEAN	TOPCLEAN XP™	TOPCLEAN XP™	TOPCLEAN XP™	TOPCLEAN XP™	TOPCLEAN XP™	TOPCLEAN	TOPCLEAN XP™	PUR Ultimate™	TOPCLEAN XP™	TOPCLEAN XP™	TOPCLEAN XP™	
Wear Layer (mm)	0.30	0.40	0.55	0.70	0.70	0.70	0.30	0.55	0.70	0.55	0.70	0.80	
Total thickness (mm)	2.00	2.20	2.50	2.50	2.50	2.50	4.00	4.50	6.50	4.50	5.00	4.50	
Residual Indentation (mm) (average measured value)	0.10	0.05	0.05	0.05	0.05	0.05	≤ 0.10	≤ 0.10	≤ 0.02	≤ 0.10	< 0.10	0.15 ≤ 0.20	
Beveled edges	No	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	
Formats	3 formats	4 formats	9 formats	9 formats	10 formats	12 formats for iD Supernature 9 formats for iD Tatoo	2 formats	3 formats	2 formats	2 formats	2 formats	3 formats	
Customisation*	No	No	Yes	Yes	Yes	Yes	No	Yes	No	No	No	Yes	
Indoor Air Quality	Low VOC < 100 µg/m³	Ultra low VOC < 10 µg/m³					Low VOC < 100 µg/m³	Ultra low VOC < 10 µg/m³	Low VOC < 100 µg/m³	Low VOC < 100 µg/m³	Low VOC < 100 µg/m³	Low VOC < 100 µg/m³	Ultra low VOC < 10 µg/m³
Phtalate-free	100% phtalate-free						100% phtalate-free		100% phtalate-free		100% phtalate-free		

* Possibility to change the planks/tiles format, the beveling and/or the surface aspect.



HIGH & HEAVY TRAFFIC LVT GLUE-DOWN



iD INSPIRATION

A premium LVT glue-down collection for all commercial areas, iD Inspiration distinctive and fully customisable designs are particularly suited for retail, hospitality and workplace

SENSORY BENEFITS

- Coordinated colours and designs for planks and tiles
- Create your own flooring look with Tarkett's customisation concept
- All designs available in 0.55mm and 0.70mm wear layers
- Over 75,000 potential combinations (colour, size, surface and finish)
- Personalise every aspect of your project using feature lines and matching skirtings

FUNCTIONAL BENEFITS

- Great dimensional stability
- Save time and money with easy maintenance
- No wax, no polish for life with TopClean XP™!
- New iD Inspiration Click version for easy renovation

ENVIRONMENTAL BENEFITS


- 100% recyclable
- 100% phthalate-free
- Ultra low VOC (<10 µg/m³)



Available in iD Supernature & Tattoo, iD Mixonomi, iD Inspiration Click/Click™


TECHNICAL DATA	STANDARDS	iD Mixonomi	iD Supernature & Tattoo	iD Inspiration 55	iD Inspiration 70	iD Inspiration 40
Classification						
Type of floor covering	EN ISO 10582 (EN 649)	Heterogeneous Compact Resilient Floorcovering	Heterogeneous Compact Resilient Floorcovering	Modular heterogeneous product		
Classification	ISO 10874 (EN 685)	Domestic: 23 Commercial: 34 Industrial: 43	Domestic: 23 Commercial: 34 Industrial: 43	Residential: 23 Commercial: 34 Industrial: 42	Residential: 23 Commercial: 34 Industrial: 43	Residential: 23 Commercial: 32 Industrial: 41
Characteristics						
Total thickness	EN ISO 24346 (EN 428)	2.50mm	2.50mm	2.50mm		2.20mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.70mm	0.70mm	0.55mm	0.70mm	0.40mm
Total weight	EN ISO 23997 (EN 430)	4000 g/m²	3950 g/m²	3850g/m²		3 700g/m²
Wear layer binder content		Type I	Type I	Type I		
Dimensions	EN ISO 24342 (EN 427)	Diamond 38,486 x 66,66 cm Herringbone Left 9,62 x 38,486 cm Herringbone Right 9,62 x 38,486 cm Hexagon Large 33,33 x 38,486 cm Hexagon Small 20 x 23,094 cm Rectangle 10 x 50 cm Square 25 x 25 cm Trapèze 16,66 x 38,486 cm Triangle Large 38,486 x 38,486 cm Triangle Small 19,243 x 19,243 cm	Standard formats Planks 10 x 50 cm, 75 planks per box = 3,75 m² 16,66 x 100 cm, 22 planks per box = 3,67 m² 12,5 x 122 cm, 24 planks per box = 3,66 m² 20 x 122 cm, 15 planks per box = 3,66 m² Tiles 25 x 50 cm, 30 tiles per box = 3,75 m² 50 x 50 cm (for stone designs only), 15 tiles per box = 3,75 m² 50 x 100 cm* (for stone designs only), 7 tiles per pallet 100 x 100 cm* (for stone designs only), 70 tiles per pallet 100 x 150 cm* (for stone designs only), 47 tiles per pallet Special formats Small Hexagone 20 x 23,094 cm, 60 planks per box = 2,08 m² Large Hexagone 33,33 x 38,486 cm, 20 planks per box = 1,92 m² Left & Right Herringbone 8,33 x 38,486 cm, 80 planks per box = 2,56 m²	Planks 16,66 x 100 cm, 22 planks/box = 3,67 m² 12,5 x 122 cm, 24 planks/box = 3,66 m² 20 x 122 cm, 15 planks/box = 3,66 m² 25 x 150 cm, 10 planks/box = 3,75 m² Tiles 25 x 50 cm, 30 tiles/box = 3,75 m² 50 x 50 cm, 15 tiles/box = 3,75 m² 50 x 100 cm, 7 tiles/box = 3,50 m² 100 x 100 cm	Planks 16,66 x 100 cm, 25 planks/box = 4,17 m² 20 x 122 cm, 17 planks/box = 4,15 m² Tiles 50 x 50 cm, 17 tiles/box = 4,25 m² 50 x 100 cm, 8 tiles/box = 4,00 m²	
Surface treatment (PUR)	-	TopCleanXP™	TopCleanXP™	TopClean XP™		
Beveled edges	-	No	No	-		
Technical performance						
Dimensional stability	EN ISO 23999	≤ 0.10 %	≤ 0.10 %	< 0.10%		
Curl resultant to heat	EN ISO 23999	≤ 2 mm	≤ 2 mm	≤ 2 mm		
Reaction to fire	EN 13501-1	Bi-s1 glued over concrete substrate Bi-s1 glued over wood substrate	Bi-s1 glued over concrete substrate Bi-s1 glued over wood substrate	Bi-s1 glued over concrete substrate Bi-s1 glued over wood substrate		
Residual indentation	EN ISO 24343-1	≤ 0.05 mm	≤ 0.05 mm	≤ 0.05mm		
Furniture leg	EN 424	No damage	No damage	No damage		
Castor chair	ISO 4918 - EN 425	No damage	No damage	No damage		
Impact sound reduction	EN ISO 717-2	ΔLw = 2 dB	ΔLw = 2 dB	ΔLw = 2dB		
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{w,eq} < 85 dB)	Class C (L _{w,eq} < 85 dB)	Class C (L _{w,eq} < 85dB)		
Thermal resistance	EN ISO 10456	0.02 m² K/W	0.02 m² K/W	0.02m² K/W		
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6	≥ 6	≥ 6		
Chemical resistance	EN ISO 26987	Not affected (0)	Not affected (0)	Not affected (0)		
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0,30	R9 μ ≥ 0,30	R9 / R10 (depending on the embossing) μ ≥ 0,30	R9 μ ≥ 0,30	
Electrical properties	EN 1815 EN 1081	<2 kV on concrete > 10⁹ Ohm	<2 kV on concrete > 10⁹ Ohm	< 2 kV on concrete R1 > 10⁹ Ohms		
Peeling resistance	EN ISO 24345	≥ 50N / 50mm	≥ 50N / 50mm	≥ 50N / 50mm		
Underfloor heating		Suitable - max. 27 °C	Suitable - max. 27 °C	Suitable - max 27°C		
Colours		33	5 designs x 16 colors	Woods: 54 Authentic Stones & Material effects: 46	Woods: 28 Material Effects: 6	

*Not available with iD Tattoo. The above information is subject to modifications for the benefit of further improvement (05/18). For more detailed technical information, please contact Tarkett.

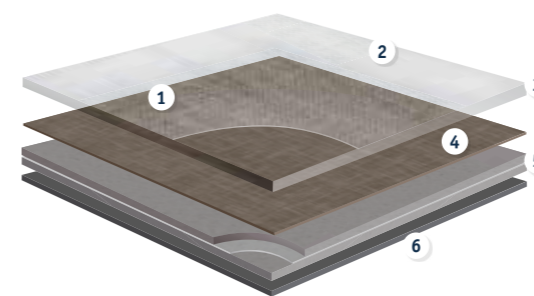

iD INSPIRATION 55-70

- Surface embossing & textures: close to real materials
- TopClean XP™ PUR reinforcement: extreme resistance and easy low-cost maintenance
- 0.55/0.70mm pure PVC transparent wear layer: exceptionally hard-wearing and indentation resistant
- 110 design options in high definition printing: with great customisation possibilities
- Unique composite structure built with solid homogeneous calandered layers reinforced with non-woven glass fibre: exceptional dimensional stability and excellent resistance to tear and indentation
- PVC backing

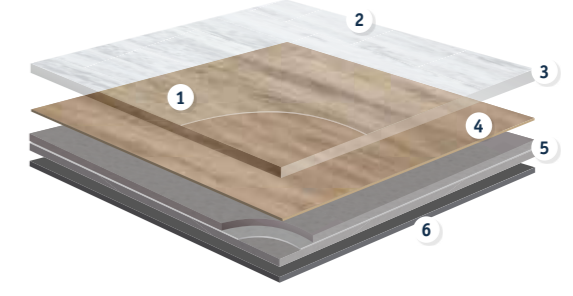


iD INSPIRATION 40

- Surface embossing & textures: close to real materials
- TopClean XP™ PUR reinforcement: extreme resistance and easy low-cost maintenance
- 0.40mm pure PVC transparent wear layer: hard-wearing and indentation resistant
- 34 design options in high definition printing: realistic designs
- Unique composite structure built with solid homogeneous calandered layers reinforced with non-woven glass fibre: exceptional dimensional stability and excellent resistance to tear and indentation
- PVC backing

iD MIXONOMI

•NEW•

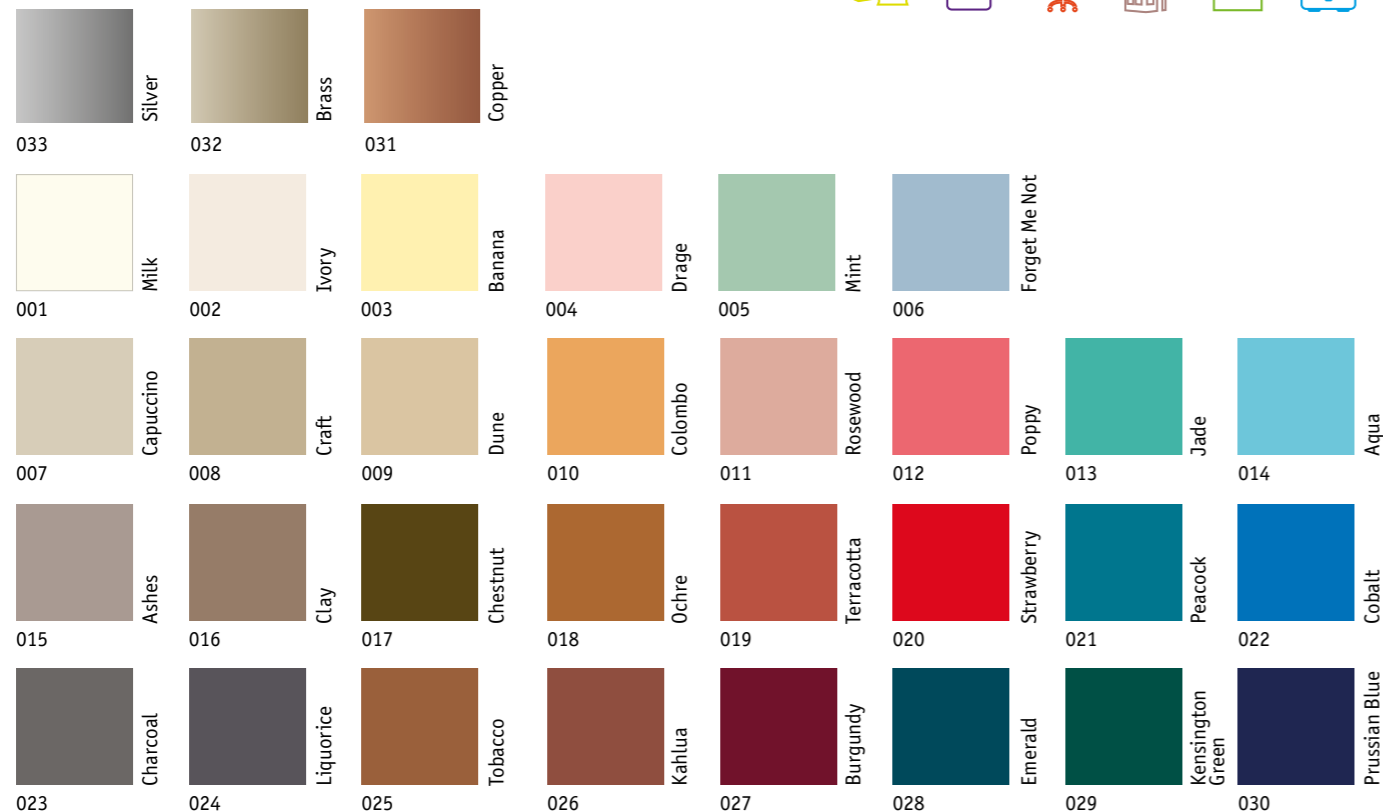

TECHNICAL DATA	STANDARDS	iD Mixonomi
Certification & classification		
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering
Classification	EN ISO 10874	Domestic: 23 Commercial: 34 Industrial: 43
Technical characteristics		
Total thickness	EN ISO 24346	2.50mm
Wear layer thickness	EN ISO 24340	0.70mm
Total weight	EN ISO 23997	4000 g/m ²
Wear layer binder content	EN ISO 10582	Type I
Dimensions	EN ISO 24342	Diamond 38,486 x 66,66 cm Herringbone Left 9,62 x 38,486 cm Herringbone Right 9,62 x 38,486 cm Hexagon Large 33,33 x 38,486 cm Hexagon Small 20 x 23,094 cm Rectangle 10 x 50 cm Square 25 x 25 cm Trapèze 16,66 x 38,486 cm Triangle Large 38,486 x 38,486 cm Triangle Small 19,243 x 19,243 cm
Surface treatment (PUR)		TopCleanXP™
Beveled edges		No
Technical performances		
Dimensional stability	EN ISO 23999	≤ 0.10 %
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	B _s -s1 glued over concrete substrate B _s -s1 glued over wood substrate
Residual indentation	EN ISO 24343-1	≤ 0.05 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔLw = 2 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,e,w} < 85 dB)
Thermal resistance	EN ISO 10456	0.02 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Chemical resistance	EN ISO 26987	Not affected (0)
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0,30
Electrical properties	EN 1815 EN 1081	< 2 kV on concrete > 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Underfloor heating		Suitable - max. 27 °C
Colours		33

The above information is subject to modifications for the benefit of further improvement (05/18).
For more detailed technical information, please contact Tarkett.

Combinable formats					
	24 444---		24 445---		24 443---
38,486 x 66,66 cm		9,62 x 38,486 cm		38,486 cm/ side	
	24 442---		24 440---		24 441---
19,243 cm/ side		33,33 x 38,486 cm		16,66 x 38,486 cm	
Mini-shapes					
	24 447---		24 448---		24 449---
20 x 23,094 cm		25 x 25 cm		10 x 50 cm	

iD MIXONOMI


Main Product Features

- iD Mixonomi is premium LVT range to play easily with Colours & Shapes to create unique layout & customer experiences
- Especially designed for creative architects & designers or brands with a strong identity
- All the advantages of Tarkett Heavy traffic Glue Down LVT :
 - Great dimensional stability
 - Save time and money with easy maintenance
 - No wax, no polish for life with TopCleanXP™!
- Ultra low VOC emissions contribute to better indoor air quality

Sustainability Tag




General Information



Logistics Information

Available in 6 fully combinable formats



Available in 3 mini-shapes for an allover look



iD SUPERNATURE & TATTOO

•NEW•



Garden Oak



TECHNICAL DATA	STANDARDS	iD Supernature & Tattoo
Classification		
Type of floor covering	EN ISO 10582 (EN 649)	Heterogeneous Compact Resilient Floorcovering
Classification	ISO 10874 (EN 685)	Domestic: 23 Commercial: 34 Industrial: 43
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	2.50mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.70mm
Total weight	EN ISO 23997 (EN 430)	3950 g/m ²
Wear layer binder content		Type I
Dimensions	EN ISO 24342 (EN 427)	Standard formats
		Planks 10 x 50 cm, 75 planks per box = 3,75 m ² 16,66 x 100 cm, 22 planks per box = 3,67 m ² 12,5 x 122 cm, 24 planks per box = 3,66 m ² 20 x 122 cm, 15 planks per box = 3,66 m ²
		Tiles 25 x 50 cm, 30 tiles per box = 3,75 m ² 50 x 50 cm (for stone designs only), 15 tiles per box = 3,75 m ² 50 x 100 cm* (for stone designs only), 7 tiles per box = 3,5 m ² 100 x 100 cm* (for stone designs only), 70 tiles per pallet 100 x 150 cm* (for stone designs only), 47 tiles per pallet
		Special formats Small Hexagone 20 x 23.094 cm, 60 planks per box = 2,08 m ² Large Hexagone 33.33 x 38.486 cm, 20 planks per box = 1,92 m ² Left & Right Herringbone 8.33 x 38.486 cm, 80 planks per box = 2,56 m ²
Surface treatment (PUR)	—	TopCleanXP™
Beveled edges	-	No
Technical performance		
Dimensional stability	EN ISO 23999	≤ 0.10 %
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	B _{s1} -s1 glued over concrete substrate B _{s1} -s1 glued over wood substrate
Residual indentation	EN ISO 24343-1	≤ 0.05 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔL _w = 2 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,rw} < 85 dB)
Thermal resistance	EN ISO 10456 EN ISO 105-B02 (method 3a)	0.02 m ² K/W ≥ 6
Light fastness	EN ISO 26987	Not affected (0)
Chemical resistance	DIN 51130 EN 13893	R9 μ ≥ 0,30
Slip resistance	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm
Electrical properties	EN ISO 24345	≥ 50N / 50mm
Peeling resistance		Suitable - max. 27 °C
Underfloor heating		
Colours		5 designs x 16 colors

*Not available with iD Tattoo. The above information is subject to modifications for the benefit of further improvement (05/18). For more detailed technical information, please contact Tarkett.

Standard formats			
	24424 ---		24425 ---
10 x 50cm		16.66 x 100cm	
	24420 ---		24421 ---
12.5 x 122cm		20 x 122cm	
Special formats			
	24438 ---		24439 ---
20 x 23.094cm Small Hexagone		33.33 x 38.486cm Large Hexagone	
	24436 ---		24437 ---
8.33 x 38.486cm Left Herringbone		8.33 x 38.486cm Right Herringbone	

iD SUPERNATURE Garden Oak

Main Product Features

- A premium wood, stone, concrete LVT offer Super natural effect really convincing
- High definition printing natural shading from real wood scanning
- No repetition effect
- Select your layout/format, your pattern and your perfect shade to match your concept
- All the advantages of Tarkett Heavy traffic Glue Down LVT :
 - Great dimensional stability
 - Save time and money with easy maintenance
 - No wax, no polish for life with TopCleanXP™!

Surface Treatment




Sustainability Tag



Logistics Information

Available in planks



Available in special formats



Laying direction:



General Information



According to European Classification ISO 10874 -0,70mm




iD SUPERNATURE & TATTOO

•NEW•



Park Oak

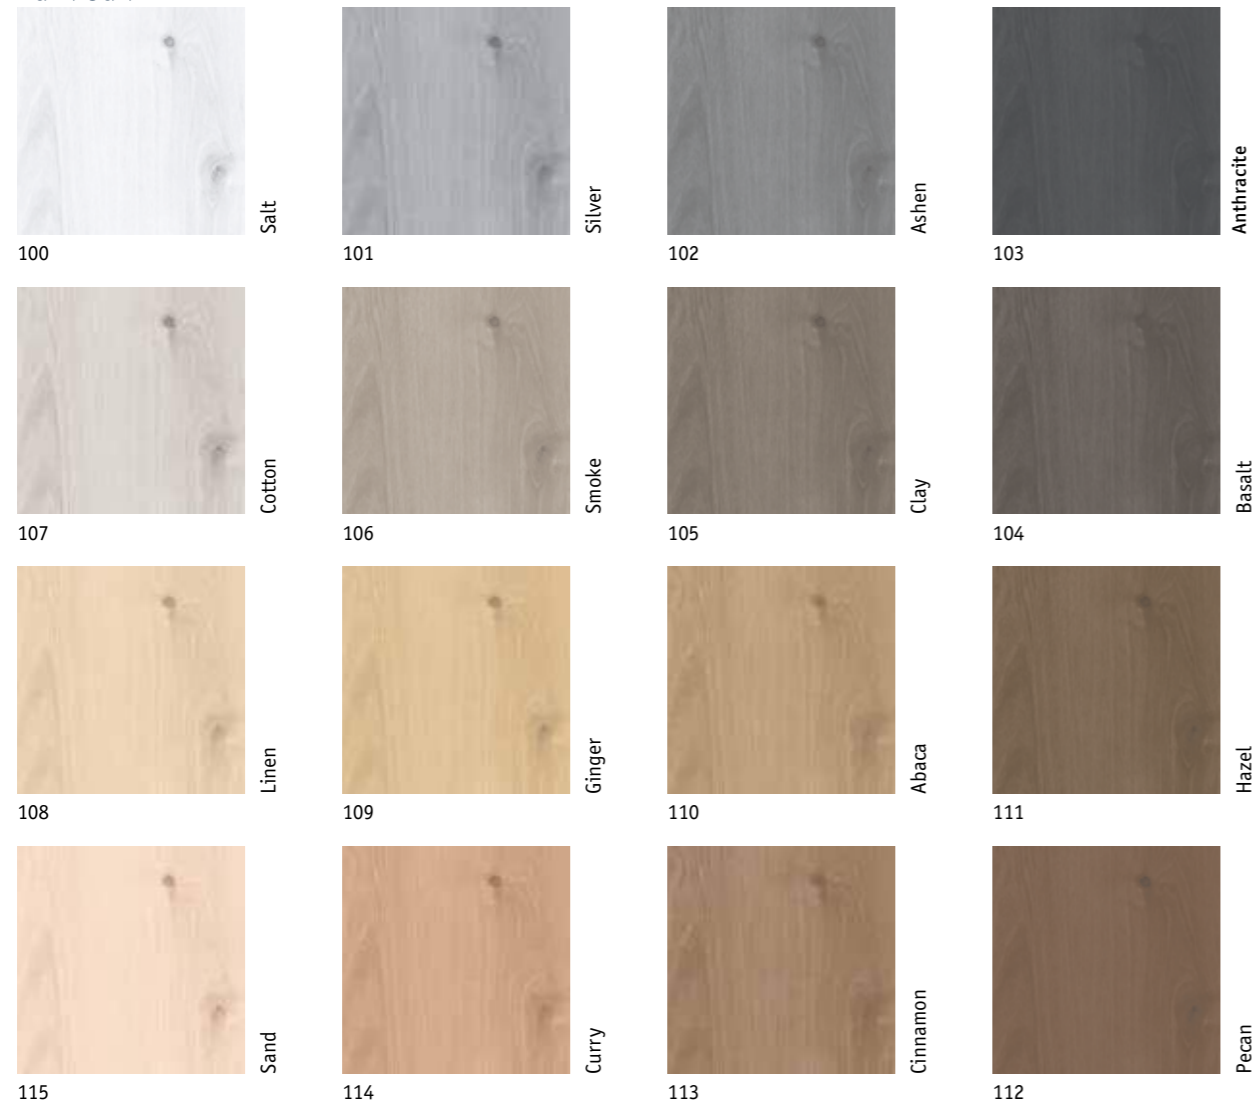

These 16 natural shades are available in 7 formats, see page 223 for more details.

TECHNICAL DATA	STANDARDS	iD Supernature & Tattoo
Classification		
Type of floor covering	EN ISO 10582 (EN 649)	Heterogeneous Compact Resilient Floorcovering
Classification	ISO 10874 (EN 685)	Domestic: 23 Commercial: 34 Industrial: 43
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	2.50mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.70mm
Total weight	EN ISO 23997 (EN 430)	3950 g/m ²
Wear layer binder content		Type I
Dimensions	EN ISO 24342 (EN 427)	Standard formats Planks 10 x 50 cm, 75 planks per box = 3,75 m ² 16,66 x 100 cm, 22 planks per box = 3,67 m ² 12,5 x 122 cm, 24 planks per box = 3,66 m ² 20 x 122 cm, 15 planks per box = 3,66 m ² Tiles 25 x 50 cm, 30 tiles per box = 3,75 m ² 50 x 50 cm (for stone designs only), 15 tiles per box = 3,75 m ² 50 x 100 cm* (for stone designs only), 7 tiles per box = 3,5 m ² 100 x 100 cm* (for stone designs only), 70 tiles per pallet 100 x 150 cm* (for stone designs only), 47 tiles per pallet
		Special formats Small Hexagone 20 x 23.094 cm, 60 planks per box = 2,08 m ² Large Hexagone 33.33 x 38.486 cm, 20 planks per box = 1,92 m ² Left & Right Herringbone 8.33 x 38.486 cm, 80 planks per box = 2,56 m ²
Surface treatment (PUR)	—	TopCleanXP™
Beveled edges	-	No
Technical performance		
Dimensional stability	EN ISO 23999	≤ 0.10 %
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	B _{s1} -s1 glued over concrete substrate B _{s1} -s1 glued over wood substrate
Residual indentation	EN ISO 24343-1	≤ 0.05 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔL _w = 2 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,rw} < 85 dB)
Thermal resistance	EN ISO 10456	0.02 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Chemical resistance	EN ISO 26987	Not affected (0)
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0,30
Electrical properties	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Underfloor heating		Suitable - max. 27 °C
Colours		5 designs x 16 colors

*Not available with iD Tattoo. The above information is subject to modifications for the benefit of further improvement (05/18). For more detailed technical information, please contact Tarkett.

Standard formats			
	24424 ---		24425 ---
10 x 50cm		16.66 x 100cm	
	24420 ---		24421 ---
12.5 x 122cm		20 x 122cm	
Special formats			
	24438 ---		24439 ---
20 x 23.094cm Small Hexagone		33.33 x 38.486cm Large Hexagone	
	24436 ---		24437 ---
8.33 x 38.486cm Left Herringbone		8.33 x 38.486cm Right Herringbone	

iD SUPERNATURE Park Oak

Main Product Features

- A premium wood, stone, concrete LVT offer Super natural effect really convincing
- High definition printing natural shading from real wood scanning
- No repetition effect
- Select your layout/format, your pattern and your perfect shade to match your concept
- All the advantages of Tarkett Heavy traffic Glue Down LVT :
 - Great dimensional stability
 - Save time and money with easy maintenance
 - No wax, no polish for life with TopCleanXP™!

Surface Treatment




Sustainability Tag




Logistics Information

Available in planks



Available in special formats



Laying direction:



General Information



According to European Classification ISO 10874 -0,70mm



iD SUPERNATURE & TATTOO

•NEW•



Forest Oak



These 16 natural shades are available in 7 formats, see page 223 for more details.

TECHNICAL DATA	STANDARDS	iD Supernature & Tattoo
Classification		
Type of floor covering	EN ISO 10582 (EN 649)	Heterogeneous Compact Resilient Floorcovering
Classification	ISO 10874 (EN 685)	Domestic: 23 Commercial: 34 Industrial: 43
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	2.50mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.70mm
Total weight	EN ISO 23997 (EN 430)	3950 g/m ²
Wear layer binder content		Type I
Dimensions		
	EN ISO 24342 (EN 427)	Standard formats Planks 10 x 50 cm, 75 planks per box = 3,75 m ² 16,66 x 100 cm, 22 planks per box = 3,67 m ² 12,5 x 122 cm, 24 planks per box = 3,66 m ² 20 x 122 cm, 15 planks per box = 3,66 m ² Tiles 25 x 50 cm, 30 tiles per box = 3,75 m ² 50 x 50 cm (for stone designs only), 15 tiles per box = 3,75 m ² 50 x 100 cm* (for stone designs only), 7 tiles per box = 3,5 m ² 100 x 100 cm* (for stone designs only), 70 tiles per pallet 100 x 150 cm* (for stone designs only), 47 tiles per pallet Special formats Small Hexagone 20 x 23.094 cm, 60 planks per box = 2,08 m ² Large Hexagone 33.33 x 38.486 cm, 20 planks per box = 1,92 m ² Left & Right Herringbone 8.33 x 38.486 cm, 80 planks per box = 2,56 m ²
Surface treatment (PUR)	—	TopCleanXP™
Beveled edges	-	No
Technical performance		
Dimensional stability	EN ISO 23999	≤ 0.10 %
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	B _s -s1 glued over concrete substrate B _s -s1 glued over wood substrate
Residual indentation	EN ISO 24343-1	≤ 0.05 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔL _w = 2 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,r,w} < 85 dB)
Thermal resistance	EN ISO 10456	0.02 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Chemical resistance	EN ISO 26987	Not affected (0)
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0,30
Electrical properties	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Underfloor heating		Suitable - max. 27 °C
Colours		
		5 designs x 16 colors

*Not available with iD Tattoo. The above information is subject to modifications for the benefit of further improvement (05/18). For more detailed technical information, please contact Tarkett.

Standard formats			
	24424 ---		24425 ---
10 x 50cm		16.66 x 100cm	
	24420 ---		24421 ---
12.5 x 122cm		20 x 122cm	
Special formats			
	24438 ---		24439 ---
20 x 23.094cm Small Hexagone		33.33 x 38.486cm Large Hexagone	
	24436 ---		24437 ---
8.33 x 38.486cm Left Herringbone		8.33 x 38.486cm Right Herringbone	

iD SUPERNATURE Forest Oak

Main Product Features

- A premium wood, stone, concrete LVT offer Super natural effect really convincing
- High definition printing natural shading from real wood scanning
- No repetition effect
- Select your layout/format, your pattern and your perfect shade to match your concept
- All the advantages of Tarkett Heavy traffic Glue Down LVT :
 - Great dimensional stability
 - Save time and money with easy maintenance
 - No wax, no polish for life with TopCleanXP™!

Surface Treatment




Sustainability Tag



Logistics Information

Available in planks



Available in special formats



Laying direction:



General Information



iD SUPERNATURE & TATTOO

•NEW•



Belgian Stone



TECHNICAL DATA	STANDARDS	iD Supernature & Tattoo
Classification		
Type of floor covering	EN ISO 10582 (EN 649)	Heterogeneous Compact Resilient Floorcovering
Classification	ISO 10874 (EN 685)	Domestic: 23 Commercial: 34 Industrial: 43
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	2.50mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.70mm
Total weight	EN ISO 23997 (EN 430)	3950 g/m ²
Wear layer binder content		Type I
Dimensions	EN ISO 24342 (EN 427)	Standard formats
		Planks 10 x 50 cm, 75 planks per box = 3,75 m ² 16,66 x 100 cm, 22 planks per box = 3,67 m ² 12,5 x 122 cm, 24 planks per box = 3,66 m ² 20 x 122 cm, 15 planks per box = 3,66 m ²
		Tiles 25 x 50 cm, 30 tiles per box = 3,75 m ² 50 x 50 cm (for stone designs only), 15 tiles per box = 3,75 m ² 50 x 100 cm* (for stone designs only), 7 tiles per box = 3,5 m ² 100 x 100 cm* (for stone designs only), 70 tiles per pallet 100 x 150 cm* (for stone designs only), 47 tiles per pallet
		Special formats Small Hexagone 20 x 23.094 cm, 60 planks per box = 2,08 m ² Large Hexagone 33.33 x 38.486 cm, 20 planks per box = 1,92 m ² Left & Right Herringbone 8.33 x 38.486 cm, 80 planks per box = 2,56 m ²
Surface treatment (PUR)	—	TopCleanXP™
Beveled edges	-	No
Technical performance		
Dimensional stability	EN ISO 23999	≤ 0.10 %
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	B _{s1} -s1 glued over concrete substrate B _{s1} -s1 glued over wood substrate
Residual indentation	EN ISO 24343-1	≤ 0.05 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔL _w = 2 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,rw} < 85 dB)
Thermal resistance	EN ISO 10456 EN ISO 105-B02 (method 3a)	0.02 m ² K/W ≥ 6
Light fastness	EN ISO 26987	Not affected (0)
Chemical resistance	DIN 51130 EN 13893	R9 μ ≥ 0,30
Slip resistance	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm
Electrical properties	EN ISO 24345	≥ 50N / 50mm
Peeling resistance		Suitable - max. 27 °C
Underfloor heating		
Colours		5 designs x 16 colors

*Not available with iD Tattoo. The above information is subject to modifications for the benefit of further improvement (05/18). For more detailed technical information, please contact Tarkett.

Standard formats			
	24426 ---		24427 ---
25 x 50cm		50 x 50cm	
	24428 ---		24429 ---
50 x 100cm		100 x 100cm	
Special formats			
	24435 ---		24438 ---
150 x 100cm		20 x 23.094cm Small Hexagone	33.33 x 38.486cm Large Hexagone
			24439 ---
		33.33 x 38.486cm Large Hexagone	

iD SUPERNATURE Belgian Stone

Main Product Features

- A premium wood, stone, concrete LVT offer Super natural effect really convincing
- High definition printing natural shading from real wood scanning
- No repetition effect
- Select your layout/format, your pattern and your perfect shade to match your concept
- All the advantages of Tarkett Heavy traffic Glue Down LVT :
 - Great dimensional stability
 - Save time and money with easy maintenance
 - No wax, no polish for life with TopCleanXP™!

Surface Treatment



Sustainability Tag




Logistics Information

Available in planks




Available in special formats



Laying direction:



General Information




According to European Classification ISO 10874 -0,70mm

iD SUPERNATURE & TATTOO

•NEW•



Patina Concrete

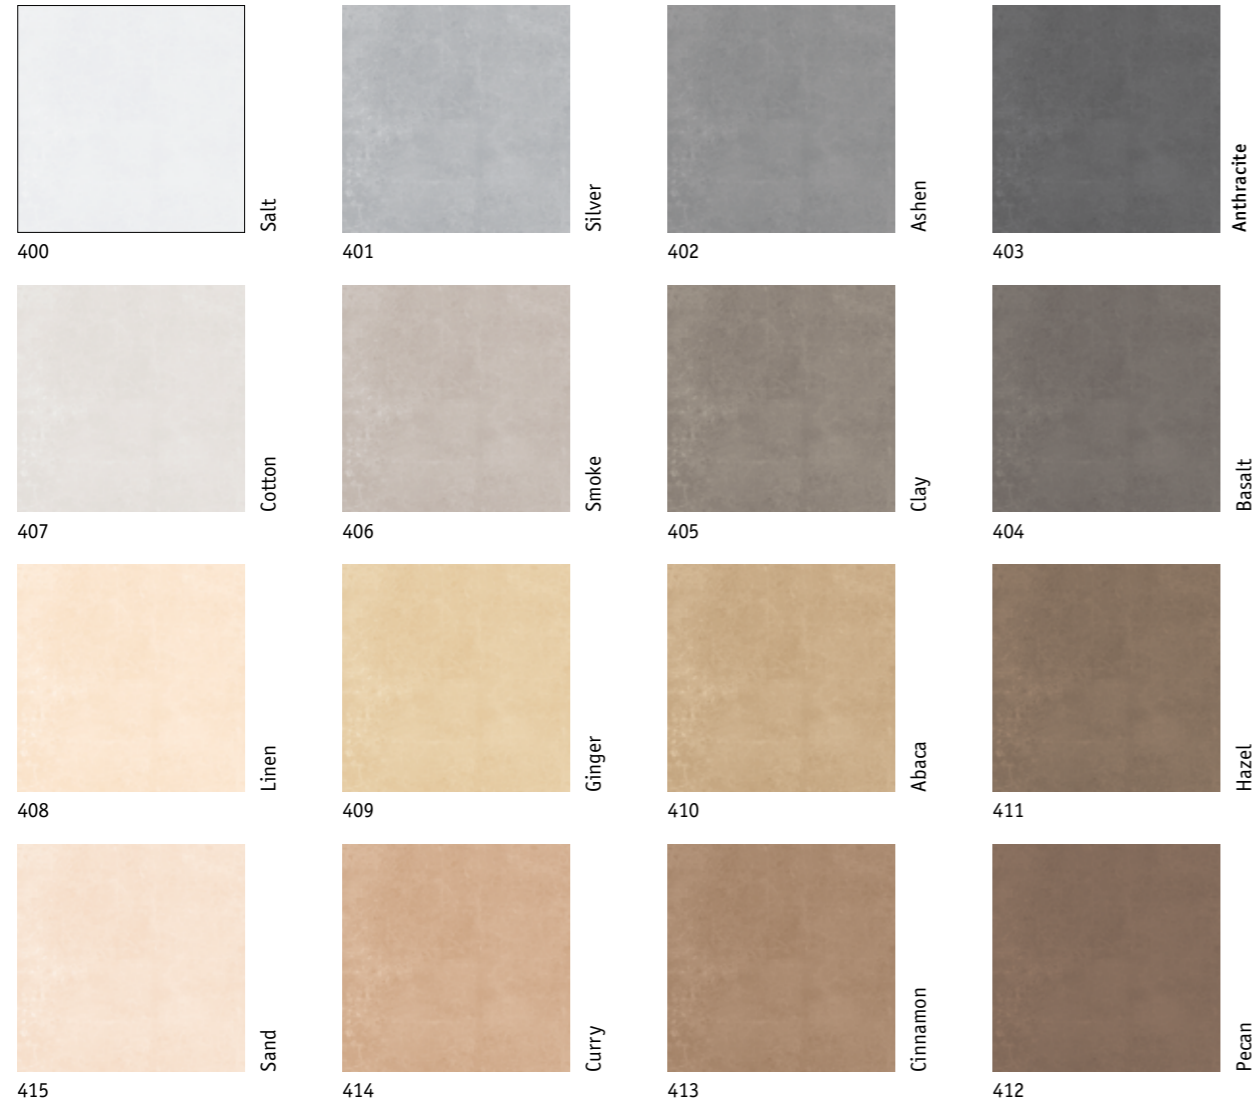

These 16 natural shades are available in 7 formats, see page 223 for more details.

TECHNICAL DATA	STANDARDS	iD Supernature & Tattoo
Classification		
Type of floor covering	EN ISO 10582 (EN 649)	Heterogeneous Compact Resilient Floorcovering
Classification	ISO 10874 (EN 685)	Domestic: 23 Commercial: 34 Industrial: 43
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	2.50mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.70mm
Total weight	EN ISO 23997 (EN 430)	3950 g/m ²
Wear layer binder content		Type I
Dimensions		
	EN ISO 24342 (EN 427)	<p>Standard formats</p> <p>Planks</p> <p>10 x 50 cm, 75 planks per box = 3,75 m²</p> <p>16,66 x 100 cm, 22 planks per box = 3,67 m²</p> <p>12,5 x 122 cm, 24 planks per box = 3,66 m²</p> <p>20 x 122 cm, 15 planks per box = 3,66 m²</p> <p>Tiles</p> <p>25 x 50 cm, 30 tiles per box = 3,75 m²</p> <p>50 x 50 cm (for stone designs only), 15 tiles per box = 3,75 m²</p> <p>50 x 100 cm* (for stone designs only), 7 tiles per box = 3,5 m²</p> <p>100 x 100 cm* (for stone designs only), 70 tiles per pallet</p> <p>100 x 150 cm* (for stone designs only), 47 tiles per pallet</p> <p>Special formats</p> <p>Small Hexagone 20 x 23.094 cm, 60 planks per box = 2,08 m²</p> <p>Large Hexagone 33.33 x 38.486 cm, 20 planks per box = 1,92 m²</p> <p>Left & Right Herringbone 8.33 x 38.486 cm, 80 planks per box = 2,56 m²</p>
Surface treatment (PUR)	—	TopCleanXP™
Beveled edges	-	No
Technical performance		
Dimensional stability	EN ISO 23999	≤ 0.10 %
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	B _n -s1 glued over concrete substrate B _n -s1 glued over wood substrate
Residual indentation	EN ISO 24343-1	≤ 0.05 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔL _w = 2 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,rw} < 85 dB)
Thermal resistance	EN ISO 10456	0.02 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Chemical resistance	EN ISO 26987	Not affected (0)
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0,30
Electrical properties	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Underfloor heating		Suitable - max. 27 °C
Colours		
		5 designs x 16 colors

*Not available with iD Tattoo. The above information is subject to modifications for the benefit of further improvement (05/18). For more detailed technical information, please contact Tarkett.

Standard formats			
	24426 ---		24427 ---
25 x 50cm		50 x 50cm	
	24428 ---		24429 ---
50 x 100cm		100 x 100cm	
Special formats			
	24435 ---		24438 ---
150 x 100cm		20 x 23.094cm Small Hexagone	33.33 x 38.486cm Large Hexagone
			24439 ---
		33.33 x 38.486cm Large Hexagone	

iD SUPERNATURE Patina Concrete

Main Product Features

- A premium wood, stone, concrete LVT offer Super natural effect really convincing
- High definition printing natural shading from real wood scanning
- No repetition effect
- Select your layout/format, your pattern and your perfect shade to match your concept
- All the advantages of Tarkett Heavy traffic Glue Down LVT :
 - Great dimensional stability
 - Save time and money with easy maintenance
 - No wax, no polish for life with TopCleanXP™!

Surface Treatment




Sustainability Tag




Logistics Information

Available in planks




Available in special formats



Laying direction:



General Information




According to European Classification ISO 10874 -0,70mm

iD SUPERNATURE & TATTOO


•NEW•



iD Tattoo (scale 1/5)

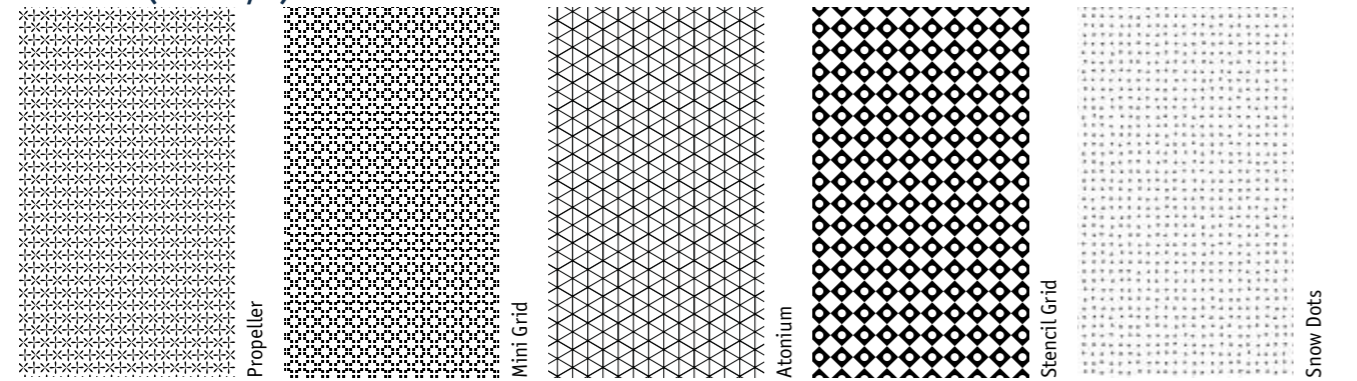

iD Tattoo (scale 1/5)

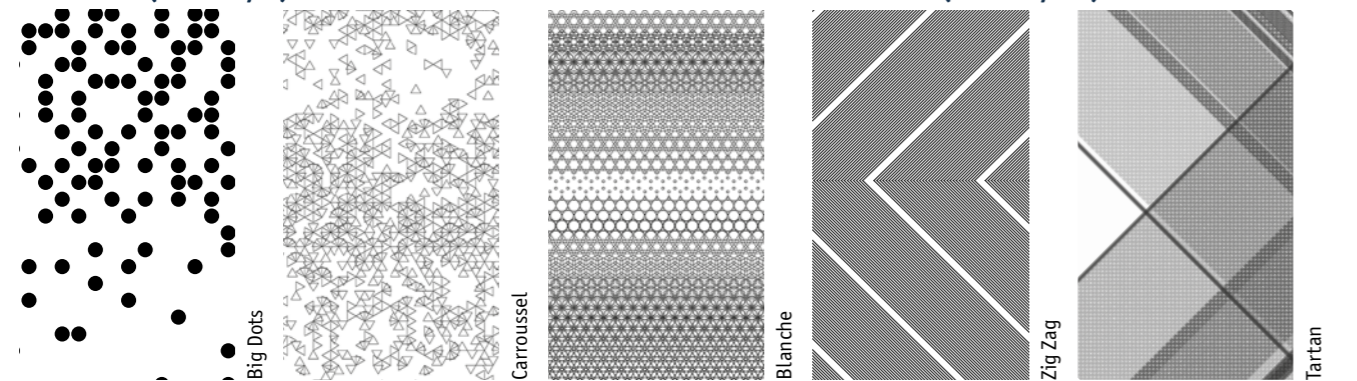

TECHNICAL DATA	STANDARDS	iD Supernature & Tattoo
Classification		
Type of floor covering	EN ISO 10582 (EN 649)	Heterogeneous Compact Resilient Floorcovering
Classification	ISO 10874 (EN 685)	Domestic: 23 Commercial: 34 Industrial: 43
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	2.50mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.70mm
Total weight	EN ISO 23997 (EN 430)	3950 g/m ²
Wear layer binder content		Type I
Dimensions	EN ISO 24342 (EN 427)	Standard formats Planks 10 x 50 cm, 75 planks per box = 3,75 m ² 16,66 x 100 cm, 22 planks per box = 3,67 m ² 12,5 x 122 cm, 24 planks per box = 3,66 m ² 20 x 122 cm, 15 planks per box = 3,66 m ² Tiles 25 x 50 cm, 30 tiles per box = 3,75 m ² 50 x 50 cm (for stone designs only), 15 tiles per box = 3,75 m ² 50 x 100 cm* (for stone designs only), 7 tiles per box = 3,5 m ² 100 x 100 cm* (for stone designs only), 70 tiles per pallet 100 x 150 cm* (for stone designs only), 47 tiles per pallet
		Special formats Small Hexagone 20 x 23.094 cm, 60 planks per box = 2,08 m ² Large Hexagone 33.33 x 38.486 cm, 20 planks per box = 1,92 m ² Left & Right Herringbone 8.33 x 38.486 cm, 80 planks per box = 2,56 m ²
Surface treatment (PUR)	—	TopCleanXP™
Beveled edges	-	No
Technical performance		
Dimensional stability	EN ISO 23999	≤ 0.10 %
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	B _n -s1 glued over concrete substrate B _n -s1 glued over wood substrate
Residual indentation	EN ISO 24343-1	≤ 0.05 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔL _w = 2 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,r,w} < 85 dB)
Thermal resistance	EN ISO 10456	0.02 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Chemical resistance	EN ISO 26987	Not affected (0)
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0,30
Electrical properties	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Underfloor heating		Suitable - max. 27 °C
Colours		5 designs x 16 colors

*Not available with iD Tattoo. The above information is subject to modifications for the benefit of further improvement (05/18). For more detailed technical information, please contact Tarkett.

Colour your tattoo in:

	Banana		Coabalt		Jade		Poppy
--	--------	--	---------	--	------	--	-------

Or Tone on Tone

TATTOO

Main Product Features

- A premium wood, stone, concrete LVT offer Super natural effect really convincing
- High definition printing natural shading from real wood scanning
- No repetition effect
- Select your layout/format, your pattern and your perfect shade to match your concept
- All the advantages of Tarkett Heavy traffic Glue Down LVT :
-Great dimensional stability
-Save time and money with easy maintenance
-No wax, no polish for life with TopCleanXP™!

Surface Treatment



Sustainability Tag



Logistics Information

General Information




According to European Classification ISO 10874 - 0,70mm

iD INSPIRATION 55-70



Antik Oak - Grey

Antik Oak

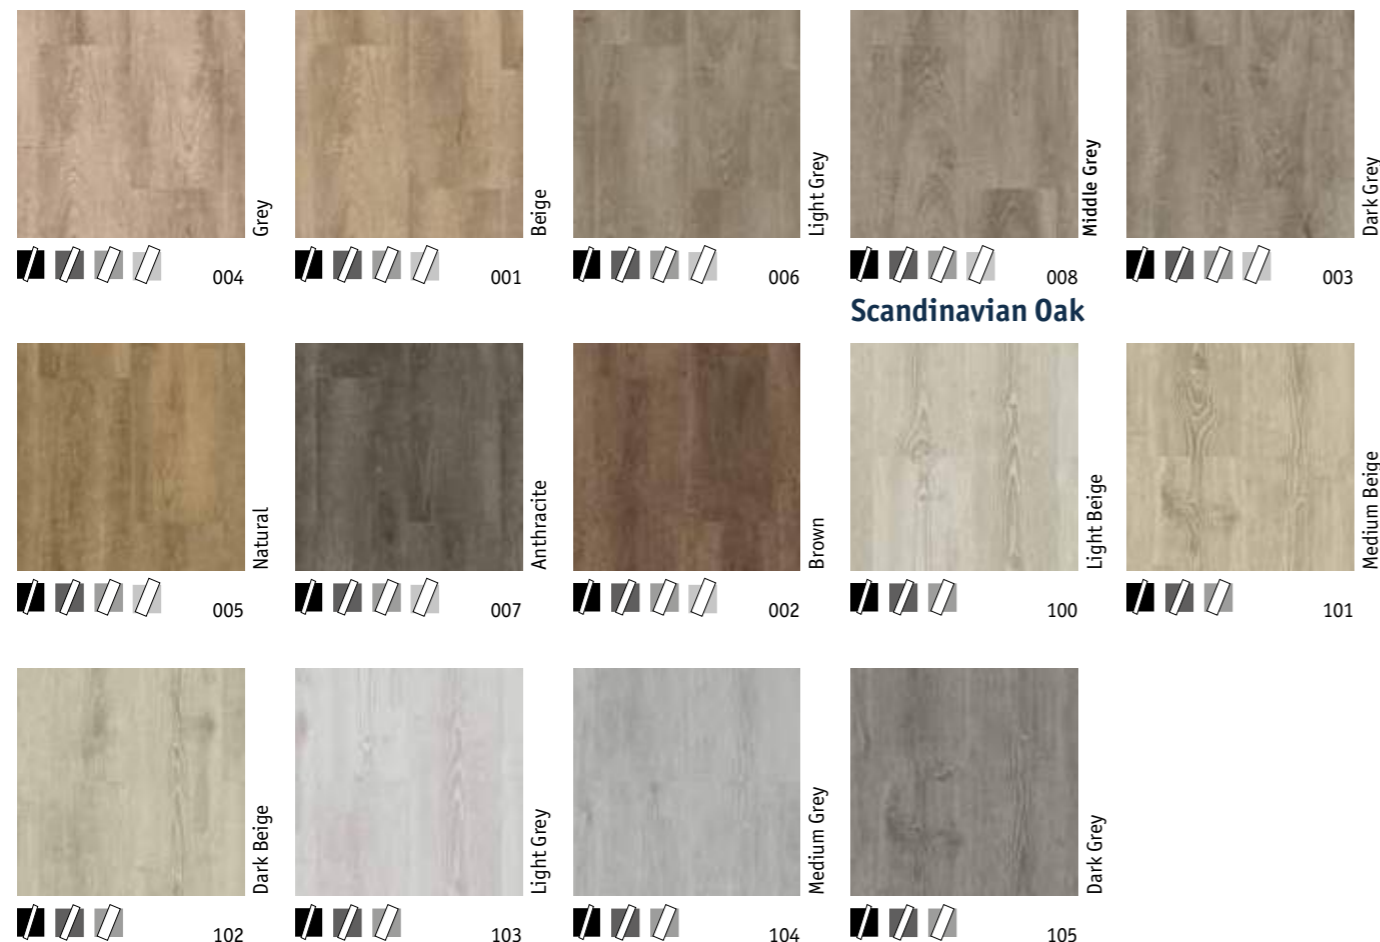

TECHNICAL DATA	STANDARDS	iD Inspiration 55	iD Inspiration 70
Classification			
Type of floor covering	EN ISO 10582 (EN 649)	Modular heterogeneous product	
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 33 42	Classes: 34 43
Characteristics			
Total thickness	EN ISO 24346 (EN 428)	2.50mm	
Wear layer thickness	EN ISO 24340 (EN 429)	0.55mm	0.70mm
Total weight	EN ISO 23997 (EN 430)	4000g/m ²	
PU treatment	—	TopClean XP™	
Wear layer binder content	ISO 10582	Type I	
Technical performance			
Impact sound reduction Acoustic improvement	EN ISO 717/2 NF 531-074	ΔLw = 2dB Class C (L _{n,e,w} < 85dB)	ΔLw = 2dB Class C (L _{n,e,w} < 85dB)
Residual indentation	Average measured value	0.05mm	
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1	B _f -s1 glued over wood and concrete substrates	
Slip resistance	DIN 51130 EN 13893	R9 / R10 (depending on the embossing) μ ≥ 0,30	
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm	
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ Ohms	
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)	
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable - max 27°C	
Light fastness	EN ISO 105-B02	≥ 6	

The above information is subject to modifications for the benefit of further improvement (06/2018).
For more detailed technical information, please contact Tarkett.

iD INSPIRATION 55-70 Woods

Main Product Features

- Highly resistant product with 0.55mm and 0.70mm transparent wear-layer
- Great customisation possibilities
- Made in Germany
- Ultra low VOC (10 µg/m³, 100 times lower than strictest European standards) contributing to better indoor air quality
- All the advantages of Tarkett Heavy traffic Glue Down LVT :
 - Great dimensional stability
 - Save time and money with easy maintenance
 - No wax, no polish for life with TopCleanXP™!

Surface Treatment




Sustainability Tag



Logistics Information

Available in planks



Laying direction:



General Information



	iD 55: 24230 --- iD 70: 24200 ---		iD 55: 24232 --- iD 70: 24202 ---
	iD 55: 24231 --- iD 70: 24201 ---		iD 55: 24233 --- iD 70: 24203 ---


iD INSPIRATION 55-70





Contemporary Oak - Grey, Grege, Brown



English Oak

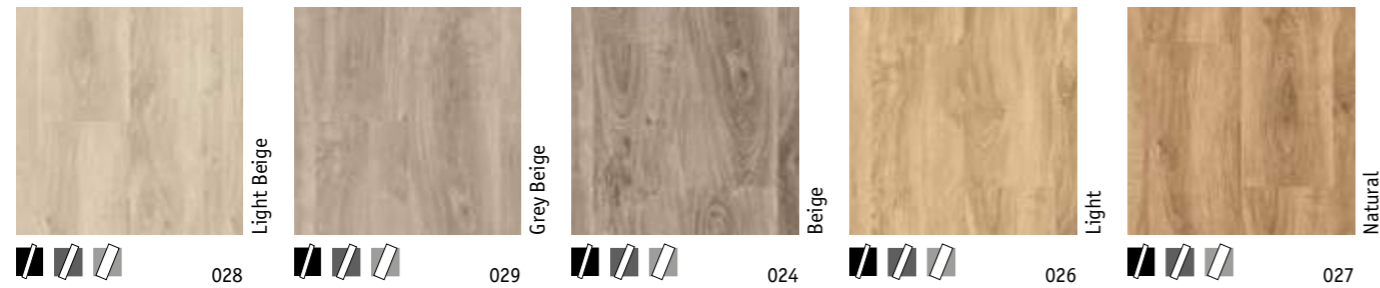

Rustic Oak

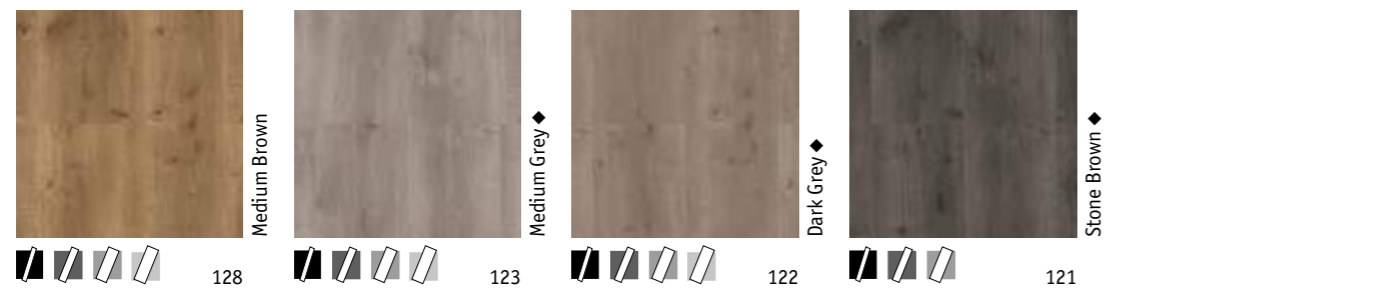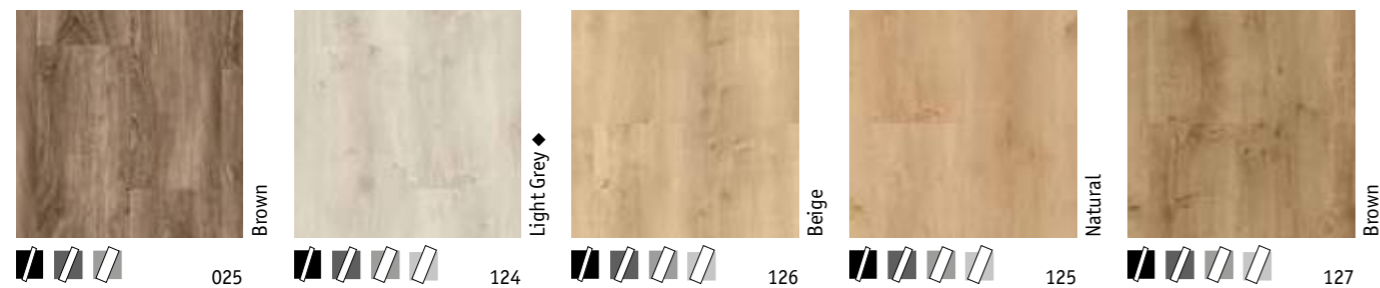

Contemporary Oak



◆ Available also in iD Inspiration Click

TECHNICAL DATA	STANDARDS	iD Inspiration 55	iD Inspiration 70
Classification			
Type of floor covering	EN ISO 10582 (EN 649)	Modular heterogeneous product	
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 33 42	Classes: 34 43
Characteristics			
Total thickness	EN ISO 24346 (EN 428)	2.50mm	
Wear layer thickness	EN ISO 24340 (EN 429)	0.55mm	0.70mm
Total weight	EN ISO 23997 (EN 430)	4000g/m ²	
PU treatment	—	TopClean XP™	
Wear layer binder content	ISO 10582	Type I	
Technical performance			
Impact sound reduction Acoustic improvement	EN ISO 717/2 NF S31-074	ΔLw = 2dB Class C (L _{n,e,w} < 85dB)	ΔLw = 2dB Class C (L _{n,e,w} < 85dB)
Residual indentation	Average measured value	0.05mm	
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1	B _s -s1 glued over wood and concrete substrates	
Slip resistance	DIN 51130 EN 13893	R9 / R10 (depending on the embossing) μ ≥ 0,30	
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm	
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ Ohms	
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)	
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable - max 27°C	
Light fastness	EN ISO 105-B02	≥ 6	

The above information is subject to modifications for the benefit of further improvement (06/2018).
For more detailed technical information, please contact Tarkett.

	iD 55: 24230 --- iD 70: 24200 ---		iD 55: 24232 --- iD 70: 24202 ---
	iD 55: 24231 --- iD 70: 24201 ---		iD 55: 24233 --- iD 70: 24203 ---

iD INSPIRATION 55-70 Woods

Main Product Features

- Highly resistant product with 0.55mm and 0.70mm transparent wear-layer
- Great customisation possibilities
- Made in Germany
- Ultra low VOC (10 µg/m³, 100 times lower than strictest European standards) contributing to better indoor air quality
- All the advantages of Tarkett Heavy traffic Glue Down LVT :
 - Great dimensional stability
 - Save time and money with easy maintenance
 - No wax, no polish for life with TopCleanXP™!

Surface Treatment




Sustainability Tag



Logistics Information

Available in planks



Laying direction:



General Information



iD INSPIRATION 55-70



Pallet Pine - White, Natural, Brown




Brushed Pine



Vintage Teak



Wenge

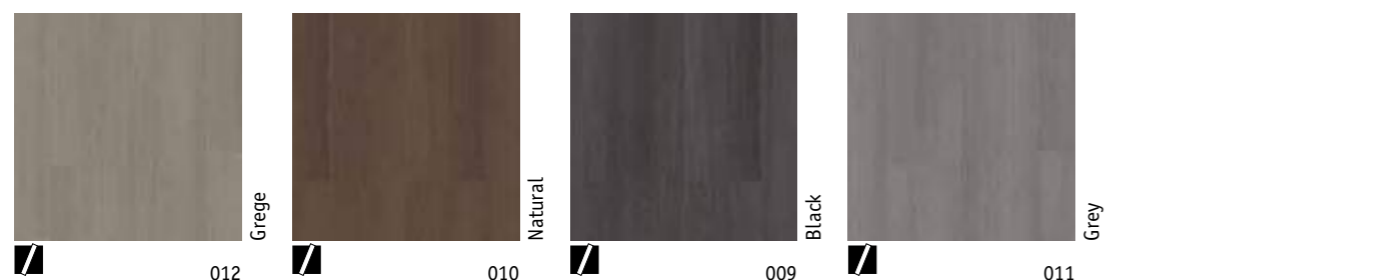

TECHNICAL DATA	STANDARDS	iD Inspiration 55	iD Inspiration 70
Classification			
Type of floor covering	EN ISO 10582 (EN 649)	Modular heterogeneous product	
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 33 42	Classes: 34 43
Characteristics			
Total thickness	EN ISO 24346 (EN 428)	2.50mm	
Wear layer thickness	EN ISO 24340 (EN 429)	0.55mm	0.70mm
Total weight	EN ISO 23997 (EN 430)	4000g/m ²	
PU treatment	—	TopClean XP™	
Wear layer binder content	ISO 10582	Type I	
Technical performance			
Impact sound reduction Acoustic improvement	EN ISO 717/2 NF 531-074	ΔLw = 2dB Class C (L _{n,e,w} < 85dB)	ΔLw = 2dB Class C (L _{n,e,w} < 85dB)
Residual indentation	Average measured value	0.05mm	
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1	B _f -s1 glued over wood and concrete substrates	
Slip resistance	DIN 51130 EN 13893	R9 / R10 (depending on the embossing) μ ≥ 0,30	
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm	
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ Ohms	
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)	
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable - max 27°C	
Light fastness	EN ISO 105-B02	≥ 6	

The above information is subject to modifications for the benefit of further improvement (06/2018). For more detailed technical information, please contact Tarkett.

iD INSPIRATION 55-70 Woods

Main Product Features

- Highly resistant product with 0.55mm and 0.70mm transparent wear-layer
- Great customisation possibilities
- Made in Germany
- Ultra low VOC (10 µg/m³, 100 times lower than strictest European standards) contributing to better indoor air quality
- All the advantages of Tarkett Heavy traffic Glue Down LVT :
 - Great dimensional stability
 - Save time and money with easy maintenance
 - No wax, no polish for life with TopCleanXP™!

Surface Treatment




Sustainability Tag



Logistics Information

Available in planks



Laying direction:



General Information



	iD 55: 24235 --- iD 70: 24205 ---		iD 55: 24231 --- iD 70: 24201 ---
	iD 55: 24230 --- iD 70: 24200 ---		iD 55: 24232 --- iD 70: 24202 ---

iD INSPIRATION 55-70




Elm - Light Grey, Natural



ELM



Trend Line

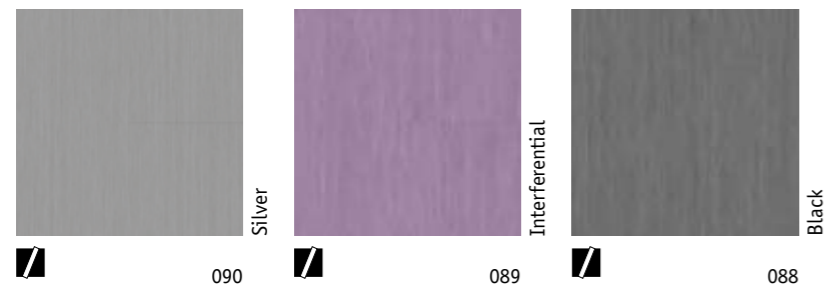

Patina Ash



TECHNICAL DATA	STANDARDS	iD Inspiration 55	iD Inspiration 70
Classification			
Type of floor covering	EN ISO 10582 (EN 649)	Modular heterogeneous product	
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 33 42	Classes: 34 43
Characteristics			
Total thickness	EN ISO 24346 (EN 428)	2.50mm	
Wear layer thickness	EN ISO 24340 (EN 429)	0.55mm	0.70mm
Total weight	EN ISO 23997 (EN 430)	4000g/m ²	
PU treatment	—	TopClean XP™	
Wear layer binder content	ISO 10582	Type I	
Technical performance			
Impact sound reduction Acoustic improvement	EN ISO 717/2 NF S31-074	ΔLw = 2dB Class C (L _{n,e,w} < 85dB)	ΔLw = 2dB Class C (L _{n,e,w} < 85dB)
Residual indentation	Average measured value	0.05mm	
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1	B _s -s1 glued over wood and concrete substrates	
Slip resistance	DIN 51130 EN 13893	R9 / R10 (depending on the embossing) μ ≥ 0,30	
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm	
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ Ohms	
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)	
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable - max 27°C	
Light fastness	EN ISO 105-B02	≥ 6	

The above information is subject to modifications for the benefit of further improvement (06/2018).
For more detailed technical information, please contact Tarkett.

iD INSPIRATION 55-70 Woods

Main Product Features

- Highly resistant product with 0.55mm and 0.70mm transparent wear-layer
- Great customisation possibilities
- Made in Germany
- Ultra low VOC (10 µg/m³, 100 times lower than strictest European standards) contributing to better indoor air quality
- All the advantages of Tarkett Heavy traffic Glue Down LVT :
 - Great dimensional stability
 - Save time and money with easy maintenance
 - No wax, no polish for life with TopCleanXP™!

Surface Treatment




Sustainability Tag



Logistics Information


Available in planks



Laying direction:



General Information

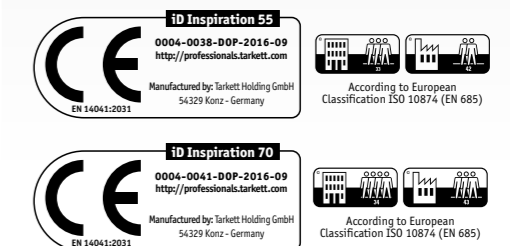

16,66 x 100cm	iD 55: 24235 --- iD 70: 24205 ---		
12,5 x 122cm	iD 55: 24230 --- iD 70: 24200 ---	25 x 122cm	iD 55: 24232 --- iD 70: 24202 ---
20 x 122cm	iD 55: 24231 --- iD 70: 24201 ---	25 x 150cm	iD 55: 24233 --- iD 70: 24203 ---


iD INSPIRATION 55-70




Oxide - Copper, Black Steel




Terrazzo

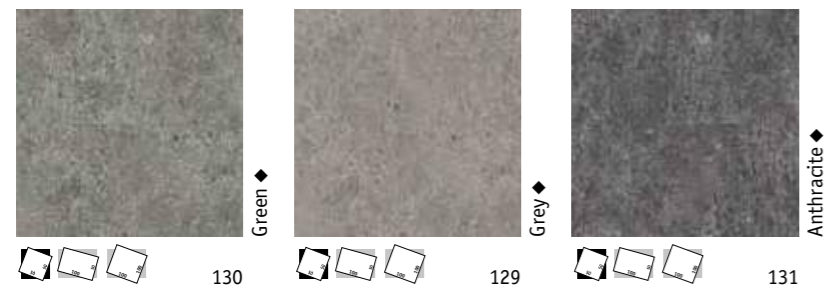

Rock

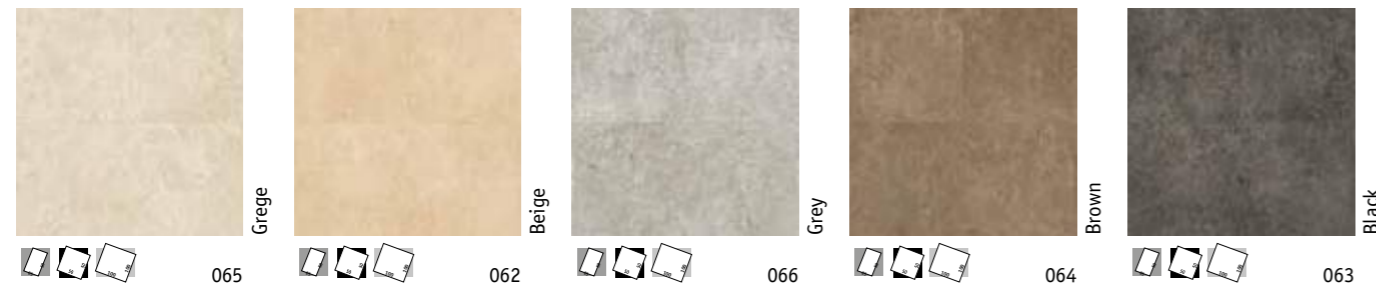

Oxide

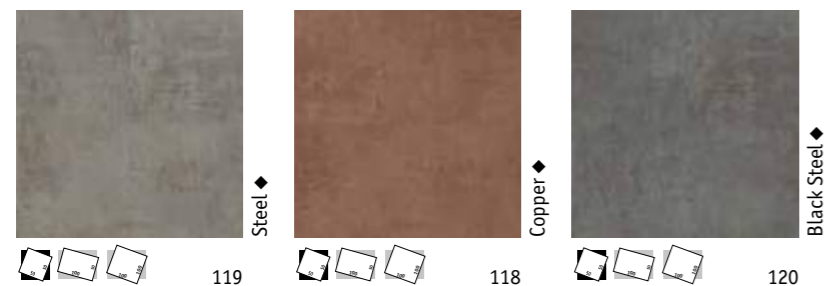

TECHNICAL DATA	STANDARDS	iD Inspiration 55	iD Inspiration 70
Classification			
Type of floor covering	EN ISO 10582 (EN 649)	Modular heterogeneous product	
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 33 42	Classes: 34 43
Characteristics			
Total thickness	EN ISO 24346 (EN 428)	2.50mm	
Wear layer thickness	EN ISO 24340 (EN 429)	0.55mm	0.70mm
Total weight	EN ISO 23997 (EN 430)	4000g/m ²	
PU treatment	—	TopClean XP™	
Wear layer binder content	ISO 10582	Type I	
Technical performance			
Impact sound reduction Acoustic improvement	EN ISO 717/2 NF S31-074	ΔLw = 2dB Class C (L _{n,e,w} < 85dB)	ΔLw = 2dB Class C (L _{n,e,w} < 85dB)
Residual indentation	Average measured value	0.05mm	
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1	B _n -s1 glued over wood and concrete substrates	
Slip resistance	DIN 51130 EN 13893	R9 / R10 (depending on the embossing) μ ≥ 0,30	
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm	
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ Ohms	
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)	
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable - max 27°C	
Light fastness	EN ISO 105-B02	≥ 6	

The above information is subject to modifications for the benefit of further improvement (06/2018).
For more detailed technical information, please contact Tarkett.

iD INSPIRATION 55-70

Authentic stones & Material effects

Main Product Features

- Highly resistant product with 0.55mm and 0.70mm transparent wear-layer
- Great customisation possibilities
- Made in Germany
- Ultra low VOC (10 µg/m³, 100 times lower than strictest European standards) contributing to better indoor air quality
- All the advantages of Tarkett Heavy traffic Glue Down LVT:
 - Great dimensional stability
 - Save time and money with easy maintenance
 - No wax, no polish for life with TopCleanXP™!

Surface Treatment



Sustainability Tag




Logistics Information


Available in planks



Laying direction:



General Information

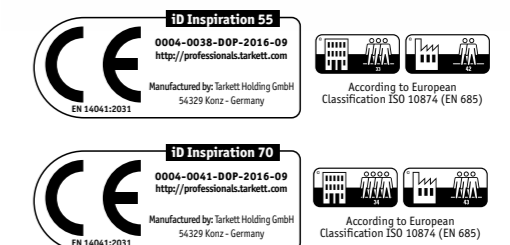


iD INSPIRATION 55-70




Polished Concrete - Light Grey, Medium Grey, Dark Grey




Bardiglio

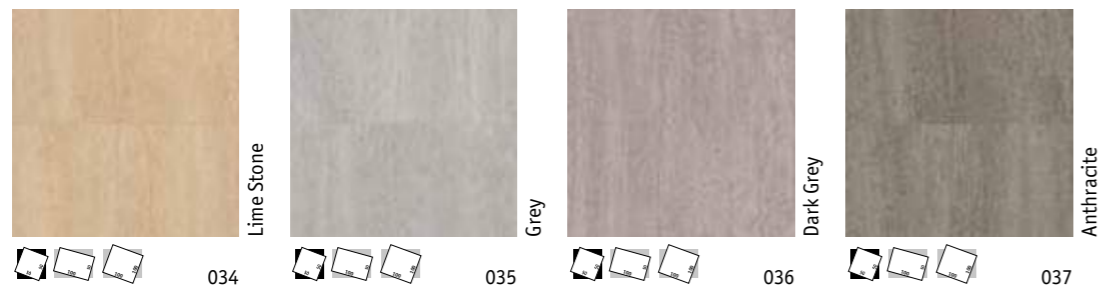

Composite

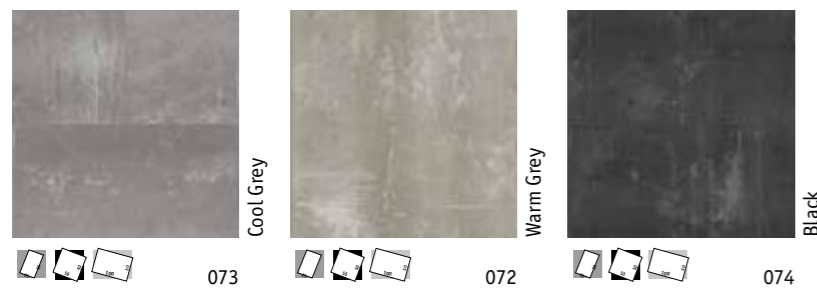

Polished Concrete

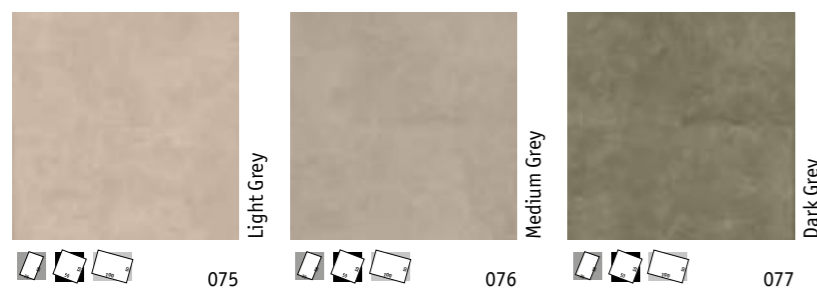

TECHNICAL DATA	STANDARDS	iD Inspiration 55	iD Inspiration 70
Classification			
Type of floor covering	EN ISO 10582 (EN 649)	Modular heterogeneous product	
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 33 42	Classes: 34 43
Characteristics			
Total thickness	EN ISO 24346 (EN 428)	2.50mm	
Wear layer thickness	EN ISO 24340 (EN 429)	0.55mm	0.70mm
Total weight	EN ISO 23997 (EN 430)	4000g/m ²	
PU treatment	—	TopClean XP™	
Wear layer binder content	ISO 10582	Type I	
Technical performance			
Impact sound reduction Acoustic improvement	EN ISO 717/2 NF S31-074	ΔLw = 2dB Class C (L _{n,e,w} < 85dB)	ΔLw = 2dB Class C (L _{n,e,w} < 85dB)
Residual indentation	Average measured value	0.05mm	
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1	B _n -s1 glued over wood and concrete substrates	
Slip resistance	DIN 51130 EN 13893	R9 / R10 (depending on the embossing) μ ≥ 0,30	
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm	
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ Ohms	
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)	
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable - max 27°C	
Light fastness	EN ISO 105-B02	≥ 6	

The above information is subject to modifications for the benefit of further improvement (06/2018). For more detailed technical information, please contact Tarkett.

iD INSPIRATION 55-70 Authentic stones

Main Product Features

- Highly resistant product with 0.55mm and 0.70mm transparent wear-layer
- Great customisation possibilities
- Made in Germany
- Ultra low VOC (10 µg/m³, 100 times lower than strictest European standards) contributing to better indoor air quality
- All the advantages of Tarkett Heavy traffic Glue Down LVT :
 - Great dimensional stability
 - Save time and money with easy maintenance
 - No wax, no polish for life with TopCleanXP™!

Surface Treatment



Sustainability Tag




Logistics Information


Available in planks



Laying direction:



General Information

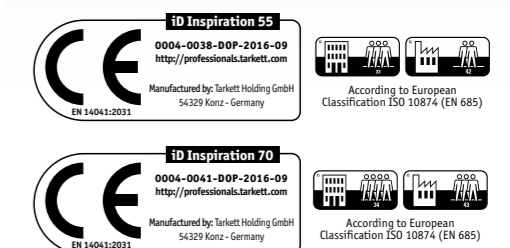

	iD 55: 24236 --- iD 70: 24206 ---		iD 55: 24238 --- iD 70: 24208 ---
	iD 55: 24237 --- iD 70: 24207 ---		iD 55: 24239 --- iD 70: 24209 ---

iD INSPIRATION 55-70



Vintage Zinc - Black, Rust, Silver



Rustic Slate



Beige



070



Grey



071



Black



069

Vintage Zinc



Silver



096



Rust



095

Caviar



Black



094



Grey



019



Beige



022



Foggy Blue




023



Mauve




021



Misty Grey




017



Tobacco



018



Brown



020

TECHNICAL DATA	STANDARDS	iD Inspiration 55	iD Inspiration 70
Classification			
Type of floor covering	EN ISO 10582 (EN 649)	Modular heterogeneous product	
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 33 42	Classes: 34 43
Characteristics			
Total thickness	EN ISO 24346 (EN 428)	2.50mm	
Wear layer thickness	EN ISO 24340 (EN 429)	0.55mm	0.70mm
Total weight	EN ISO 23997 (EN 430)	4000g/m ²	
PU treatment	—	TopClean XP™	
Wear layer binder content	ISO 10582	Type I	
Technical performance			
Impact sound reduction Acoustic improvement	EN ISO 717/2 NF S31-074	ΔLw = 2dB Class C (L _{n,e,w} < 85dB)	ΔLw = 2dB Class C (L _{n,e,w} < 85dB)
Residual indentation	Average measured value	0.05mm	
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1	B _n -s1 glued over wood and concrete substrates	
Slip resistance	DIN 51130 EN 13893	R9 / R10 (depending on the embossing) μ ≥ 0,30	
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm	
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ Ohms	
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)	
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable - max 27°C	
Light fastness	EN ISO 105-B02	≥ 6	

The above information is subject to modifications for the benefit of further improvement (06/2018).
For more detailed technical information, please contact Tarkett.

iD INSPIRATION 55-70

Authentic stones & Material effects

Main Product Features

- Highly resistant product with 0.55mm and 0.70mm transparent wear-layer
- Great customisation possibilities
- Made in Germany
- Ultra low VOC (10 µg/m³, 100 times lower than strictest European standards) contributing to better indoor air quality
- All the advantages of Tarkett Heavy traffic Glue Down LVT:
 - Great dimensional stability
 - Save time and money with easy maintenance
 - No wax, no polish for life with TopCleanXP™!

Surface Treatment



Sustainability Tag




Logistics Information


Available in planks



Laying direction:



General Information

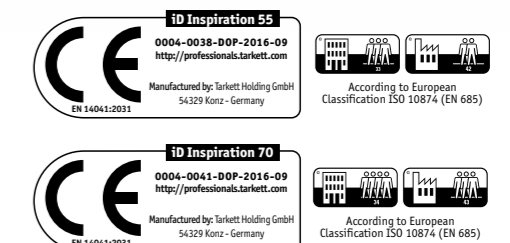


iD INSPIRATION 55-70





Twine - Light Grey, Medium Grey, Dark Grey, Blue Grey, Turquoise, Denim, Indigo



Metal Frame

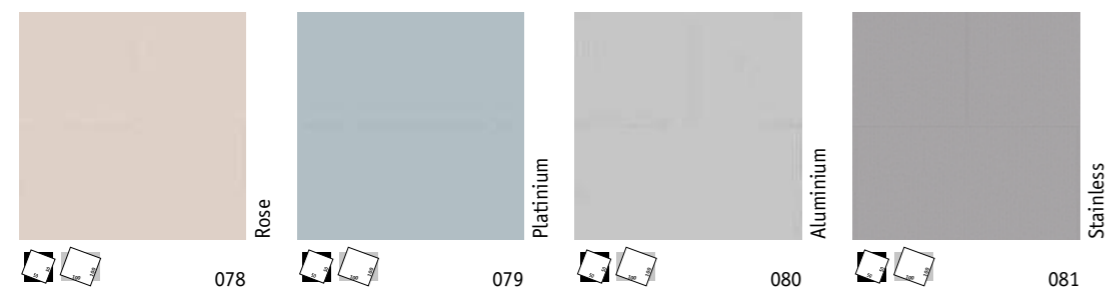

Twine

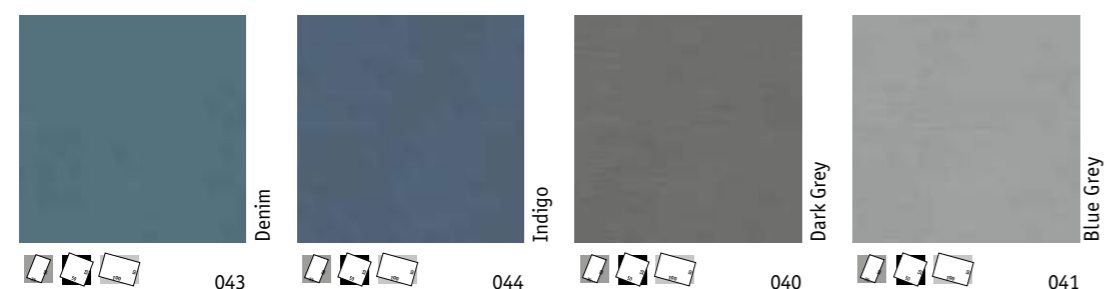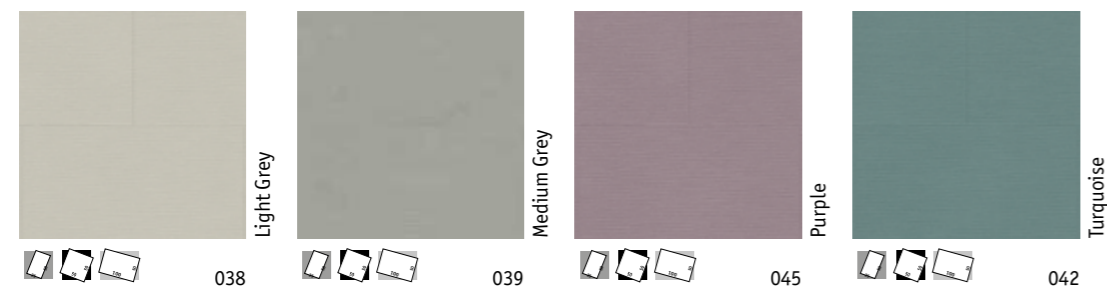

TECHNICAL DATA	STANDARDS	iD Inspiration 55	iD Inspiration 70
Classification			
Type of floor covering	EN ISO 10582 (EN 649)	Modular heterogeneous product	
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 33 42	Classes: 34 43
Characteristics			
Total thickness	EN ISO 24346 (EN 428)	2.50mm	
Wear layer thickness	EN ISO 24340 (EN 429)	0.55mm	0.70mm
Total weight	EN ISO 23997 (EN 430)	4000g/m ²	
PU treatment	—	TopClean XP™	
Wear layer binder content	ISO 10582	Type I	
Technical performance			
Impact sound reduction Acoustic improvement	EN ISO 717/2 NF S31-074	ΔLw = 2dB Class C (L _{n,e,w} < 85dB)	ΔLw = 2dB Class C (L _{n,e,w} < 85dB)
Residual indentation	Average measured value	0.05mm	
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1	B _n -s1 glued over wood and concrete substrates	
Slip resistance	DIN 51130 EN 13893	R9 / R10 (depending on the embossing) μ ≥ 0,30	
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm	
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ Ohms	
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)	
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable - max 27°C	
Light fastness	EN ISO 105-B02	≥ 6	

The above information is subject to modifications for the benefit of further improvement (06/2018). For more detailed technical information, please contact Tarkett.

iD INSPIRATION 55-70 Others

Main Product Features

- Highly resistant product with 0.55mm and 0.70mm transparent wear-layer
- Great customisation possibilities
- Made in Germany
- Ultra low VOC (10 µg/m³, 100 times lower than strictest European standards) contributing to better indoor air quality
- All the advantages of Tarkett Heavy traffic Glue Down LVT :
 - Great dimensional stability
 - Save time and money with easy maintenance
 - No wax, no polish for life with TopCleanXP™!

Surface Treatment



Sustainability Tag




Logistics Information


Available in planks



Laying direction:



General Information

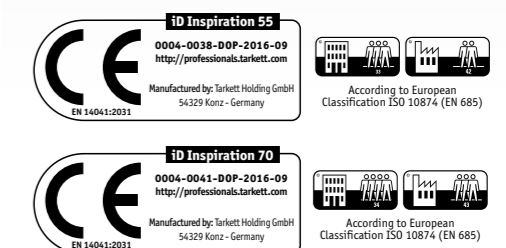


iD INSPIRATION 55-70



Tisse - Black, Red, Blue, Brown
Scandinavian Oak - Medium Grey



Tisse

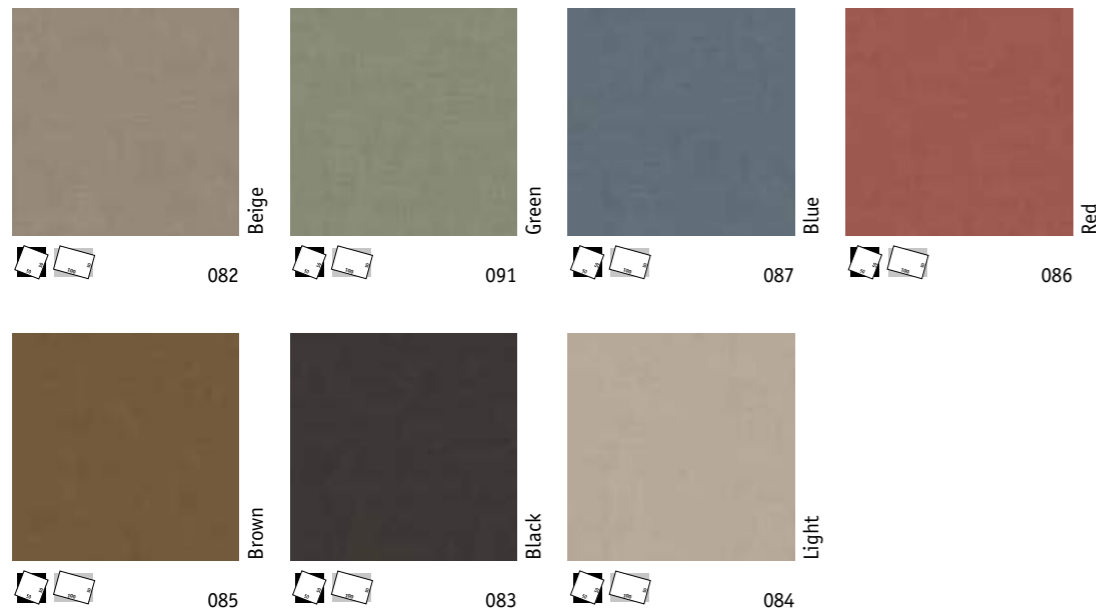

TECHNICAL DATA	STANDARDS	iD Inspiration 55	iD Inspiration 70
Classification			
Type of floor covering	EN ISO 10582 (EN 649)	Modular heterogeneous product	
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 33 42	Classes: 34 43
Characteristics			
Total thickness	EN ISO 24346 (EN 428)	2.50mm	
Wear layer thickness	EN ISO 24340 (EN 429)	0.55mm	0.70mm
Total weight	EN ISO 23997 (EN 430)	4000g/m ²	
PU treatment	—	TopClean XP™	
Wear layer binder content	ISO 10582	Type I	
Technical performance			
Impact sound reduction Acoustic improvement	EN ISO 717/2 NF 531-074	ΔLw = 2dB Class C (L _{n,e,w} < 85dB)	ΔLw = 2dB Class C (L _{n,e,w} < 85dB)
Residual indentation	Average measured value	0.05mm	
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1	B _n -s1 glued over wood and concrete substrates	
Slip resistance	DIN 51130 EN 13893	R9 / R10 (depending on the embossing) μ ≥ 0,30	
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm	
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ Ohms	
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)	
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable - max 27°C	
Light fastness	EN ISO 105-B02	≥ 6	

The above information is subject to modifications for the benefit of further improvement (06/2018).
For more detailed technical information, please contact Tarkett.

iD INSPIRATION 55-70 Others

Main Product Features

- Highly resistant product with 0.55mm and 0.70mm transparent wear-layer
- Great customisation possibilities
- Made in Germany
- Ultra low VOC (10 µg/m³, 100 times lower than strictest European standards) contributing to better indoor air quality
- All the advantages of Tarkett Heavy traffic Glue Down LVT :
 - Great dimensional stability
 - Save time and money with easy maintenance
 - No wax, no polish for life with TopCleanXP™!

Surface Treatment



Sustainability Tag




Logistics Information


Available in planks



Laying direction:



General Information

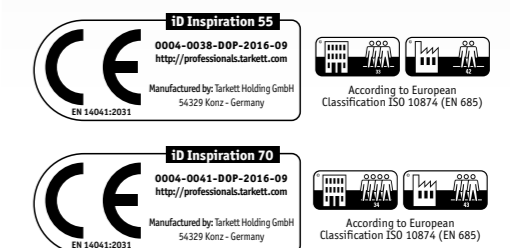

iD INSPIRATION 40



White Oak - Light, Grey



Antik Oak



English Oak



Modern Oak



White Oak



TECHNICAL DATA	STANDARDS	iD Inspiration 40
Classification		
Type of floor covering	EN ISO 10582 (EN 649)	Modular heterogeneous product
Classification	ISO 10874 (EN 685) residential commercial industrial	Classes: 23 32 41
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	2.20mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.40mm
Total weight	EN ISO 23997 (EN 430)	3 700g/m ²
PU treatment	—	TopClean XP™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Impact sound reduction Acoustic improvement	EN ISO 717/2 NF S31-074	ΔLw = 3dB Class C (L _{n,e,w} < 85dB)
Residual indentation	Average measured value	0.05mm
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	B _n -s1 glued over wood and concrete substrates
Slip resistance	DIN 51130 EN 13893	R9/R10 depending on embossing μ ≥ 0.30
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ Ohms
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable - max. 27°C
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

Antik Oak



24260 136

iD INSPIRATION 40 Woods

Main Product Features

- Very resistant product with 0.40mm transparent wear-layer
- TopClean XP™ surface protection for great resistance and easy cleaning
- Made in Germany
- VOC emissions below quantifiable level (< 10µg/m³)

Surface Treatment



Sustainability Tag



Logistics Information

Available in planks



Laying direction:



General Information



iD INSPIRATION 40



Soft Walnut - Red Brown
Modern Oak - Beige



Patina Ash

Rustic Oak



Brushed Pine



Large Beech



Soft Walnut



TECHNICAL DATA	STANDARDS	iD Inspiration 40
Classification		
Type of floor covering	EN ISO 10582 (EN 649)	Modular heterogeneous product
Classification	ISO 10874 (EN 685) residential commercial industrial	Classes: 23 32 41
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	2.20mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.40mm
Total weight	EN ISO 23997 (EN 430)	3 700g/m ²
PU treatment	—	TopClean XP™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Impact sound reduction Acoustic improvement	EN ISO 717/2 NF S31-074	ΔLw = 3dB Class C (L _{n,e,w} < 85dB)
Residual indentation	Average measured value	0.05mm
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	B _n -s1 glued over wood and concrete substrates
Slip resistance	DIN 51130 EN 13893	R9/R10 depending on embossing μ ≥ 0.30
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ Ohms
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable - max. 27°C
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

Maple



24261 143

iD INSPIRATION 40 Woods

Main Product Features

- Very resistant product with 0.40mm transparent wear-layer
- TopClean XP™ surface protection for great resistance and easy cleaning
- Made in Germany
- VOC emissions below quantifiable level (< 10µg/m³)

Surface Treatment




Sustainability Tag



Logistics Information

Available in planks



Laying direction:



General Information



iD INSPIRATION 40



Rock - Grey




Polished Concrete




Light Grey

24262 075



Medium Grey


24262 076



Dark Grey


24262 077

Rock



Natural Grey

24262 147



Grey

24262 066

TECHNICAL DATA	STANDARDS	iD Inspiration 40
Classification		
Type of floor covering	EN ISO 10582 (EN 649)	Modular heterogeneous product
Classification	ISO 10874 (EN 685) residential commercial industrial	Classes: 23 32 41
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	2.20mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.40mm
Total weight	EN ISO 23997 (EN 430)	3 700g/m ²
PU treatment	—	TopClean XP™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Impact sound reduction Acoustic improvement	EN ISO 717/2 NF S31-074	ΔLw = 3dB Class C (L _{n,e,w} < 85dB)
Residual indentation	Average measured value	0.05mm
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	B _n -s1 glued over wood and concrete substrates
Slip resistance	DIN 51130 EN 13893	R9/R10 depending on embossing μ ≥ 0.30
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ Ohms
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable - max. 27°C
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

Vintage Zinc



Alu

24263 150

iD INSPIRATION 40

Authentic stones & Material effects

Main Product Features

- Very resistant product with 0.40mm transparent wear-layer
- TopClean XP™ surface protection for great resistance and easy cleaning
- Made in Germany
- VOC emissions below quantifiable level (< 10µg/m³)

Surface Treatment



Sustainability Tag




Logistics Information

Available in planks



Laying direction:



General Information



According to European Classification ISO 10874 (EN 685)



HIGH & HEAVY TRAFFIC LVT CLICK NEW



Durable, waterproof, simple to maintain and with versatile designs worthy of the most demanding brands and customers, Tarkett design-rich solution leverages Tarkett more than 130 years of flooring and innovation experience and provides the very best in flooring today.

SENSORIAL BENEFITS

- 57 wood and stone designs :
 - 20 designs from the iD Inspiration glue-down
 - 22 designs with real wood and stone look and feel thanks to embossing in register technology (Plus)
 - 15 designs in our new rigid composite iD Click Ultimate
- High-end commercial designs inspired by the most trendy environment in retail, hospitality and office sectors, crafted in our Design Center in Europe
- Skirtings to match every design in the range
- Wide variety of premium accessories

FUNCTIONAL BENEFITS

- Fold-down click system: 30% quicker to install than glue-down products
- Save time and money with floating installation: no glue, no drying time
- Great dimensional stability
- No wax, no polish for life with TopCleanXP™
- Enhanced acoustic performance when installed with Tarfomfort Pro or Tarkomfort Premium underlayers

INTRODUCING RIGID COMPOSITE CORE (RCC) TECHNOLOGY

- Extra density RCC technology (wear-proof, stain-proof, heat-proof, waterproof):
 - Ultimate resistance (perfect solution for heavy traffic and heavy loads up to 600 kg)
 - Ultimate acoustic comfort (19dB acoustic absorption)
 - Ultimate installation (covering 400sqm without expansion gap)
 - Ultimate design (Embossing In Register / High definition printing)
- Innovative new I4F triple lock and click system available on our new iD Click Ultimate range for even faster installation

ENVIRONMENTAL BENEFITS

- 100% recyclable
- 100% phthalate-free
- Low VOC



TECHNICAL DATA	STANDARDS	iD Click Ultimate	iD Inspiration Click*	iD Inspiration Click ^{PLUS}
Classification				
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering	Heterogeneous Compact Resilient Floorcovering	Heterogeneous Compact Resilient Floorcovering
CE certification	EN 14041			Yes
Classification	EN ISO 10874	Domestic: 23 Commercial: 34 Industrial: 43	Domestic: 23 Commercial: 33 Industrial: 42	Domestic: 23 Commercial: 33 Industrial: 42
Technical characteristics				
Total thickness	EN ISO 24346	6.5 mm	4.5mm	4.5 mm
Wear layer thickness	EN ISO 24340	0.7 mm	0.55mm	0.55 mm
Total weight	EN ISO 23997	11 300 g/m ²	8 000 g/m ²	8 000 g/m ²
Surface treatment (PUR)	—	Yes - PUR Ultimate	TopClean XP™	Yes - TopCleanXP™
Wear layer binder content	ISO 10582	Type I	Type I	Type I
Beveled edges		Yes - 4 Bevels	Yes - 4 Bevels	Yes - 4 Bevels
Dimensions	EN ISO 24342	Planks 17,6 x 121,3 cm, 6 planks/box = 1,28 m ² Tiles 30 x 60 cm, 7 tiles/box = 1,26 m ²	Planks 19,05 x 121,10 cm, 7 planks/box = 1,61 m ² 24,05 x 149,10 cm, 5 planks/box = 1,79 m ² Tiles 32,38 x 60,10 cm, 9 tiles/box = 1,75 m ² 49,05 x 99,10 cm, 3 tiles/box = 1,46 m ²	Planks 19,05 x 121,10 cm - 7 planks/box = 1,66 m ² 24,05 x 149,10 cm - 5 planks/box = 1,79 m ² Tiles 49,05 x 99,10 cm - 3 tiles/box = 1,46 m ²
Technical performances				
Dimensional stability	EN ISO 23999	Average measured value ≤ 0.05% Required value ≤ 0.15%	Average measured value 0.05% Required value ≤ 0.15%	Average measured value ≤ 0.10 % Required value ≤ 0.10%
Curl resultant to heat	EN ISO 23999	≤ 1 mm	≤ 2 mm	≤ 2 mm
Reaction to fire	EN 13501-1	B _f -s1	B _f -s1 loose laid over concrete substrate	B _f -s1
Residual indentation	EN ISO 24343-1	≤ 0.02 mm	≤ 0.10mm	≤ 0.10 mm
Furniture leg	EN 424	No damage	No damage	No damage
Castor chair	ISO 4918 - EN 425	No damage	No damage	No damage
Impact sound reduction	EN ISO 717-2	ΔLw = 19dB	ΔLw = 3dB	ΔLw = 3 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,e,w} < 85 dB)	Class C (L _{n,e,w} < 85dB)	Class C (L _{n,e,w} < 85dB)
Thermal resistance	EN ISO 10456	0.05 m ² K/W	0.04m ² K/W	0.04 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	Very good (1)	Not affected (0)	Not affected (0)
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing μ ≥ 0.30	R9 / R10 depending on embossing μ ≥ 0.30	R9 / R10 depending on embossing μ ≥ 0.30
Electrical properties	EN 1815	< 2 kV on concrete > 10 ⁹ Ohm	< 2 kV on concrete > 10 ⁹ Ohm	< 2 kV on concrete ≥ 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm	≥ 50N / 50mm	≥ 50N / 50mm
Underfloor heating		Suitable - max. 27 °C	Suitable - max. 27 °C	Suitable - max. 27 °C
Colours		15	20	22

The above information is subject to modification for the benefit of further improvement. (01/18). Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions. *Also available in iD Inspiration glue-down.



iD CLICK ULTIMATE

- The Ultimate PUR surface treatment** is a photo-reticulated coating that is exceptionally resistant to abrasion and scratches.
- A high definition decorative layer** includes lifelike embossing in register on most references.
- Rigid Composite Core (RCC) technology** provides extreme dimensional resistance and stability, ensuring reliably durable performance.
- The acoustic backing with Soundblock technology** absorbs 19dB.
- Installation is fast and easy** thanks to new I4F Click technology. Simply drop, lock and click into place.



iD INSPIRATION CLICK

- Surface embossing & textures:** close to real materials
- TopCleanXP™ PUR reinforcement** for extreme resistance and easy, low-cost maintenance
- 0.55mm pure PVC transparent wear layer** for a hard-wearing, indentation-resistant surface compatible with class 33 (heavy commercial) and 42 (general industrial) use
- 20 design options in high-definition printing**
- Core layer with glass-fibre reinforcement** for exceptional dimensional stability and superior performance against tears and indentations
- Stabilising layer** for a curl-free product

iD INSPIRATION CLICK^{PLUS}

- Surface with Embossing in register technology** for a more natural look
- TopClean XP™ PUR reinforcement** for extreme resistance and easy, low-cost maintenance
- 0.55mm pure PVC transparent wear layer** for a hard-wearing, indentation-resistant surface compatible with class 33 (heavy commercial) and 42 (general industrial) use
- 22 design options in high-definition printing**
- Core layer with glass-fibre reinforcement** for exceptional dimensional stability and superior performance against tears and indentations
- Stabilising layer** for a curl-free product
- Fold-down Click System**



iD CLICK ULTIMATE

•NEW•



Stylish Oak



Beige

24775 002



White

24775 003



Grey

24775 001



Natural

24775 000

Light Oak



Light Grey

24775 013



Brown

24775 012



Warm Brown

24775 014

Soft Ash



White

24775 018



Natural


24775 019

Riviera Oak



Grey

24775 015



Light Brown

24775 017



Warm Brown

24775 016

TECHNICAL DATA	STANDARDS	iD Click Ultimate
Classification		
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering
CE certification	EN 14041	
Classification		
EN ISO 10874		Domestic: 23 Commercial: 34 Industrial: 43
Technical characteristics		
Total thickness	EN ISO 24346	6.5 mm
Wear layer thickness	EN ISO 24340	0.7 mm
Total weight	EN ISO 23997	11 300 g/m ²
Surface treatment (PUR)	—	Yes - PUR Ultimate
Wear layer binder content	ISO 10582	Type I
Beveled edges		Yes - 4 Bevels
Dimensions		
EN ISO 24342		Planks 17,6 x 121,3 cm, 6 planks/box = 1,28 m ² Tiles 30 x 60 cm, 7 tiles/box = 1,26 m ²
Technical performances		
Dimensional stability		
EN ISO 23999		Average measured value ≤ 0.05% Required value ≤ 0.15%
Curl resultant to heat	EN ISO 23999	≤ 1 mm
Reaction to fire	EN 13501-1	B _s -s1
Residual indentation	EN ISO 24343-1	≤ 0.02 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔLw = 19dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,r,w} < 85 dB)
Thermal resistance	EN ISO 10456	0.05 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Chemical resistance	EN ISO 26987	Very good (1)
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing μ ≥ 0,30
Electrical properties	EN 1815	< 2 kV on concrete > 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Underfloor heating		Suitable - max. 27 °C
Colours		
		15

The above information is subject to modification for the benefit of further improvement. (01/18). Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

Timeless Concrete




Grey

24776 022



Anthracite

24776 021



Light Grey

24776 020

iD CLICK ULTIMATE

Main Product Features

- Ultimate robustness to indentation shocks, scratch & scuff thanks to new RCC technology
- Ultimate installation minimising business close up:
 - 100 sqm installed in 8 hours thanks to quick and easy installation I4F new click system
 - Install over subfloors including ceramic tiles without preparation
 - Install longer areas without transition gap thanks to exceptional dimensional stability (400 m²)
- Ultimate design with 15 modern and stylish wood & stone designs

IDEAL FOR RENOVATION

Click System



Produced under license from I4F
<https://i4f-patents.com>


Sustainability Tag




Logistics Information

Available in planks  17,6 x 121,3 cm

Available in tiles  30 x 60 cm

Laying direction: 

General Information



According to European Classification ISO 10874 -0,55mm



iD INSPIRATION CLICK^{PLUS}

•NEW•



Lime Oak



Alpine Oak



TECHNICAL DATA	STANDARDS	iD Inspiration Click ^{PLUS}
Classification		
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering
CE certification	EN 14041	Yes
Classification	EN ISO 10874	Domestic: 23 Commercial: 33 Industrial: 42
Technical characteristics		
Total thickness	EN ISO 24346	4,5 mm
Wear layer thickness	EN ISO 24340	0,55 mm
Total weight	EN ISO 23997	8 000 g/m ²
Surface treatment (PUR)	—	Yes - TopCleanXP™
Wear layer binder content	ISO 10582	Type I
Beveled edges		Yes - 4 Bevels
Dimensions	EN ISO 24342	Planks 19,05 x 121,10 cm - 7 planks/box = 1,66 m ² 24,05 x 149,10 cm - 5 planks/box = 1,79 m ² Tiles 49,05 x 99,10 cm - 3 tiles/box = 1,46 m ²
Technical performances		
Dimensional stability	EN ISO 23999	Average measured value ≤ 0.10 % Required value ≤ 0.10%
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	B _s -s1
Residual indentation	EN ISO 24343-1	≤ 0.10 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔLw = 3 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,w} < 85dB)
Thermal resistance	EN ISO 10456	0.04 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Chemical resistance	EN ISO 26987	Not affected (0)
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing μ ≥ 0.30
Electrical properties	EN 1815	< 2 kV on concrete ≥ 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Underfloor heating		Suitable - max. 27 °C
Colours		22

The above information is subject to modification for the benefit of further improvement. (01/18). Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

iD INSPIRATION CLICK^{PLUS}

Main Product Features

- Plus Effect: Embossing In Register (EIR) technology for a look and feel close to the real thing
- Ideal for the renovation of commercial areas
- Fast, easy and economical
- Highly resistant product with 0.55mm transparent wear-layer
- Perfect matching LVT skirtings available in 20 colours




Surface Treatment



Sustainability Tag



Logistics Information

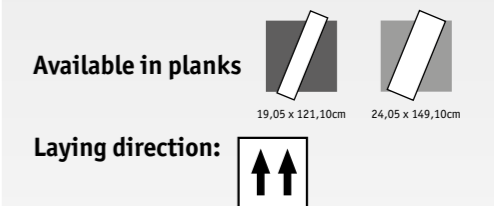

General Information



iD INSPIRATION CLICK^{PLUS}


•NEW•



Legacy Pine



Rough Concrete

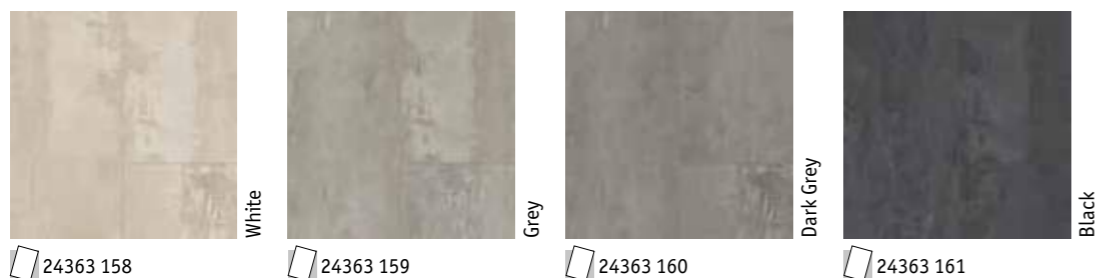

TECHNICAL DATA	STANDARDS	iD Inspiration Click ^{PLUS}
Classification		
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering
CE certification	EN 14041	Yes
Classification	EN ISO 10874	Domestic: 23 Commercial: 33 Industrial: 42
Technical characteristics		
Total thickness	EN ISO 24346	4,5 mm
Wear layer thickness	EN ISO 24340	0,55 mm
Total weight	EN ISO 23997	8 000 g/m ²
Surface treatment (PUR)	—	Yes - TopCleanXP™
Wear layer binder content	ISO 10582	Type I
Beveled edges		Yes - 4 Bevels
Dimensions	EN ISO 24342	Planks 19,05 x 121,10 cm - 7 planks/box = 1,66 m ² 24,05 x 149,10 cm - 5 planks/box = 1,79 m ² Tiles 49,05 x 99,10 cm - 3 tiles/box = 1,46 m ²
Technical performances		
Dimensional stability	EN ISO 23999	Average measured value ≤ 0.10 % Required value ≤ 0.10%
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	B _s -s1
Residual indentation	EN ISO 24343-1	≤ 0.10 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔLw = 3 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,w} < 85dB)
Thermal resistance	EN ISO 10456	0.04 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Chemical resistance	EN ISO 26987	Not affected (0)
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing μ ≥ 0.30
Electrical properties	EN 1815	< 2 kV on concrete ≥ 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Underfloor heating		Suitable - max. 27 °C
Colours		22

The above information is subject to modification for the benefit of further improvement. (01/18). Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

iD INSPIRATION CLICK^{PLUS}

Main Product Features

- Plus Effect: Embossing In Register (EIR) technology for a look and feel close to the real thing 
- Ideal for the renovation of commercial areas
- Fast, easy and economical
- Highly resistant product with 0.55mm transparent wear-layer
- Perfect matching LVT skirtings available in 20 colours


Surface Treatment



Sustainability Tag



Logistics Information

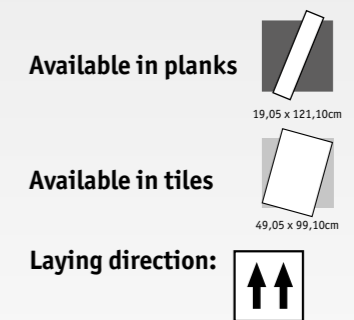

General Information



iD INSPIRATION CLICK



TECHNICAL DATA	STANDARDS	iD Inspiration Click*
Classification		
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering
CE certification	EN 14041	
Classification	EN ISO 10874	Domestic: 23 Commercial: 33 Industrial: 42
Technical characteristics		
Total thickness	EN ISO 24346	4.5mm
Wear layer thickness	EN ISO 24340	0.55mm
Total weight	EN ISO 23997	8 000 g/m ²
Surface treatment (PUR)	—	TopClean XP™
Wear layer binder content	ISO 10582	Type I
Beveled edges		Yes - 4 Bevels
Dimensions	EN ISO 24342	Planks 19,05 x 121,10 cm, 7 planks/box = 1,61 m ² 24,05 x 149,10 cm, 5 planks/box = 1,79 m ² Tiles 32,38 x 60,10 cm, 9 tiles/box = 1,75 m ² 49,05 x 99,10 cm, 3 tiles/box = 1,46 m ²
Technical performances		
Dimensional stability	EN ISO 23999	Average measured value 0.05% Required value ≤ 0.15%
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	B _s -s1 loose laid over concrete substrate
Residual indentation	EN ISO 24343-1	≤ 0.10mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔLw = 3dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{w,RA} < 85dB)
Thermal resistance	EN ISO 10456	0.04m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Chemical resistance	EN ISO 26987	Not affected (0)
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing μ ≥ 0.30
Electrical properties	EN 1815	< 2 kV on concrete > 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Underfloor heating		Suitable - max. 27 °C
Colours		20

The above information is subject to modification for the benefit of further improvement. (01/18). Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.
*Also available in iD Inspiration glue-down.

iD INSPIRATION CLICK Woods

Main Product Features

- Ideal for the renovation of commercial areas 
- Fast, easy and economical
- Highly resistant product with 0.55mm transparent wear-layer
- Perfect matching LVT skirtings available in 20 colours


Surface Treatment



Sustainability Tag




Logistics Information




General Information



Rustic Oak

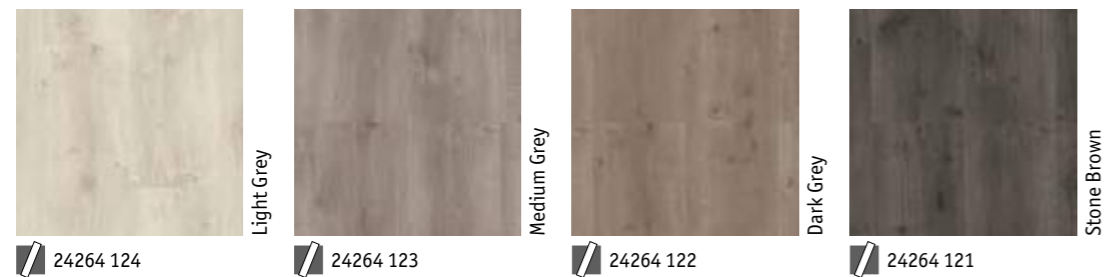

Contemporary Oak

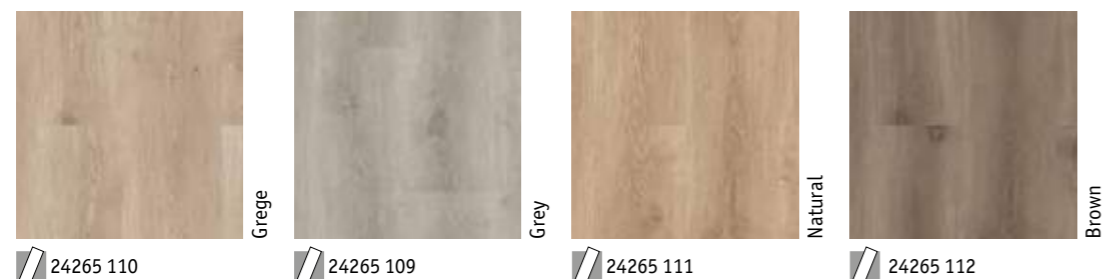

iD INSPIRATION CLICK



ELM



Light Grey

24265 113



Beige

24265 114



Natural

24265 115

Patina Ash



Beige

24264 106



Grey

24264 108

Terrazzo



Brown

24264 107



Green

24266 130



Grey

24266 129



Anthracite

24266 131

Oxide



Steel

24266 119



Copper

24266 118



Black Steel

24266 120

TECHNICAL DATA	STANDARDS	iD Inspiration Click*
Classification		
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering
CE certification	EN 14041	
Classification	EN ISO 10874	Domestic: 23 Commercial: 33 Industrial: 42
Technical characteristics		
Total thickness	EN ISO 24346	4.5mm
Wear layer thickness	EN ISO 24340	0.55mm
Total weight	EN ISO 23997	8 000 g/m ²
Surface treatment (PUR)	—	TopClean XP™
Wear layer binder content	ISO 10582	Type I
Beveled edges		Yes - 4 Bevels
Dimensions	EN ISO 24342	Planks 19,05 x 121,10 cm, 7 planks/box = 1,61 m ² 24,05 x 149,10 cm, 5 planks/box = 1,79 m ² Tiles 32,38 x 60,10 cm, 9 tiles/box = 1,75 m ² 49,05 x 99,10 cm, 3 tiles/box = 1,46 m ²
Technical performances		
Dimensional stability	EN ISO 23999	Average measured value 0.05% Required value ≤ 0.15%
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	B _s -s1 loose laid over concrete substrate
Residual indentation	EN ISO 24343-1	≤ 0.10mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔLw = 3dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,RA} < 85dB)
Thermal resistance	EN ISO 10456	0.04m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Chemical resistance	EN ISO 26987	Not affected (0)
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing μ ≥ 0.30
Electrical properties	EN 1815	< 2 kV on concrete > 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Underfloor heating		Suitable - max. 27 °C
Colours		20

The above information is subject to modification for the benefit of further improvement. (01/18). Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.
*Also available in iD Inspiration glue-down.

iD INSPIRATION CLICK Woods & Material effects

Main Product Features

- Ideal for the renovation of commercial areas
- Fast, easy and economical
- Highly resistant product with 0.55mm transparent wear-layer
- Perfect matching LVT skirtings available in 20 colours



Surface Treatment




Sustainability Tag



Logistics Information

Available in planks



Available in tiles



Laying direction:



General Information



HEAVY TRAFFIC LVT LOOSE-LAY



Eye-catching floors for high-traffic areas in offices, hospitality and retail

SENSORY BENEFITS

- Coordinated colours and patterns
- Enhances corporate image with a pleasant, productive environment

FUNCTIONAL BENEFITS

- Cost-effective installation
- Great dimensional stability
- Easy access to cables and pipes (raised floors)
- No wax, no polish for life with Top Clean XP™!

ENVIRONMENTAL BENEFITS

- Low VOC emissions contribute to better indoor air quality
- Reduced carbon footprint
- Recyclable


TECHNICAL DATA	STANDARDS	iD Inspiration Loose-lay	iD TILT	iD Square
Classification				
Type of floor covering	EN ISO 10582	Modular heterogeneous compact vinyl	Modular heterogeneous vinyl with interlocking connection	Acoustic resilient floor covering
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 33 42	Class: 34 43	Class: 34 -
Characteristics				
Total thickness	EN ISO 24346 (EN 428)	4.50mm	5.0mm	4.50mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.55mm	0.70mm	0.80mm
Total weight	EN ISO 23997 (EN 430)	7 500g/m ²	8 000g	5 195g/m ²
Polyurethane reinforcement (PUR)	-	TopClean XP™	TopClean XP™	TopClean XP™
Wear layer binder content	ISO 10582	Type I		
Technical performance				
Residual indentation	Average measured value	-	-	0.15mm
	EN ISO 24343-1 (EN 433)	≤ 0.10mm	≤ 0.10mm	≤ 0.20mm
Reaction to fire	EN 13501-1	B _s s1 loose laid on wood panel and A2 _s -s1 or A1 _s class substrate	B _s s1 over any wood derivative panel	B _s s1 loose-laid or glued over any A2 _s or A1 _s substrate (concrete) C _s s1 loose-laid or glued over any derivate wood substrate
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30		
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%	< 0.15%	≤ 0.10%
Furniture leg	EN 424	No damage		
Electrical properties	EN 1815 EN 1081	ca. 10 ¹¹ Ohm	< 2 kV on concrete R1 > 10 ⁹ Ohm	R1 > 10 ¹⁰ Ohm
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)		
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable	0.05 m2 K/W Suitable	0.04m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6	≥ 6	≥ 6
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL _w = 8dB	ΔL _w = 6 dB	ΔL _w = 15 dB (±1 dB)
Acoustic absorption	EN ISO 354 EN ISO 11654	-	-	α _w = 0.05
Acoustic Improvement	NF S 31-074	-	-	L _{n,e,w} < 75dB
Form of delivery	EN ISO 24342 (EN 427)	Planks: 22.9 x 121.9cm Tiles: 30.5 x 61cm	Tiles: 45.7 x 45.7 cm 91.4 x 91.4 cm	Planks: 25 x 100 cm Tiles: 50 x 50 cm 66 x 66 cm
Colours		22	7	37

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.




iD INSPIRATION LOOSE-LAY

- TopClean XP™ PUR reinforcement** for extreme resistance and easy low-cost maintenance
- Wear layer** 0.55 mm for commercial traffic resistance
- Printed film** in 22 different wood and stone designs
- Core layer** for proper resistance to indentation
- Glass fiber reinforcement** for perfect dimensional stability
- Bottom layer** for a solid basis to the product
- Balancing layer** for a curl-free product
- Tarkett exclusive herringbone anti-skid backing** for exceptional adherence to the subfloor and skid resistance in all directions

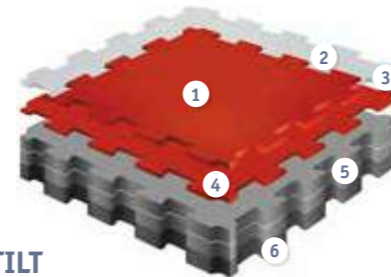

iD TILT

- TopClean XP™ PUR reinforcement** extreme resistance and easy low-cost maintenance
- Surface embossing** for better non-slip properties
- Pure PVC transparent wear layer:** exceptionally hard-wearing and indentation resistant
- Design film:** 7 design options
- Core layer with glass fiber reinforcement:** excellent dimensional stability and resistance to tear and indentation
- Balancing layer** for a curl-free product backing

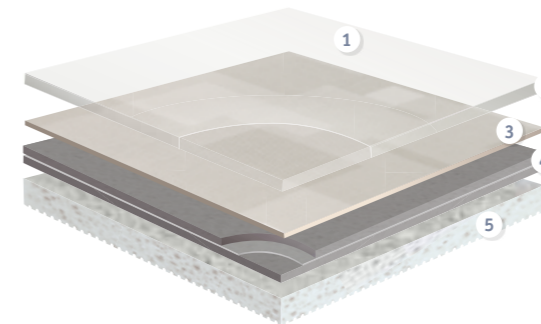

iD SQUARE

- TopClean XP™ PUR reinforcement:** extreme resistance and easy low-cost maintenance
- 0.80mm pure PVC transparent wear layer:** resistance to wear
- Decorated compact impregnation:** 37 design options
- Structure built with solid homogeneous calandered layers reinforced with non-woven glass fibre:** exceptional dimensional stability and excellent resistance to tear and indentation
- Chemical foam backing:** enhanced acoustic performance



iD INSPIRATION LOOSE-LAY



Beach Wood - Beige - Grey



Beach Wood



Beige


2464 0009



Grey

2464 0010

Delicate Wood



Natural

2464 0011



Brown

2464 0012



Black

2464 0013

Elegant Oak



White

2464 0014



Natural

2464 0015

TECHNICAL DATA	STANDARDS	iD Inspiration Loose-Lay
Classification		
Type of floor covering	EN ISO 10582	Modular heterogeneous compact vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 33 42
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	4.50mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.55mm
Total weight	EN ISO 23997 (EN 430)	7 500g/m ²
Polyurethane reinforcement (PUR)	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Residual indentation	EN ISO 24343-1	≤ 0.10mm
Reaction to fire	EN 13501-1	B _r -s1 loose laid on wood panel and A ₂ -s1 or A ₁ class substrate
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Electrical properties	EN 1081	ca. 10 ¹¹ Ohm
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)
Thermal resistance	EN ISO 10456	0.04m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	Δ Lw = 8dB

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

iD INSPIRATION Loose-lay

Main Product Features

- Tarkett exclusive anti-skid backing preventing sliding in all directions
- No permanent adhesive needed; fast and easy installation
- Excellent resistance to scratches and abrasion
- Excellent acoustic efficiency
- Superior indentation resistance

Surface Treatment



Sustainability Tag



Logistics Information

Available in planks



General Information



Sawn Oak



Grey

2464 0016



Brown

2464 0017



Dark Brown

2464 0018



iD INSPIRATION LOOSE-LAY




Beton - White - Grey - Black



Limed Oak



Mountain Oak

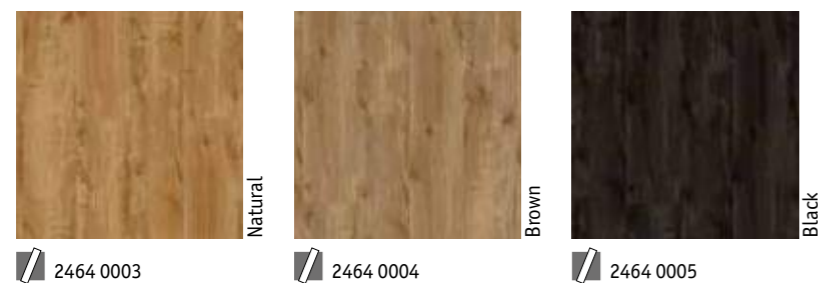

Christmas Pine



TECHNICAL DATA	STANDARDS	iD Inspiration Loose-lay
Classification		
Type of floor covering	EN ISO 10582	Modular heterogeneous compact vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 33 42
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	4.50mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.55mm
Total weight	EN ISO 23997 (EN 430)	7 500g/m ²
Polyurethane reinforcement (PUR)	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Residual indentation	EN ISO 24343-1	≤ 0.10mm
Reaction to fire	EN 13501-1	B _r -s1 loose laid on wood panel and A ₂ -s1 or A1 _r class substrate
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Electrical properties	EN 1081	ca. 10 ¹¹ Ohm
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)
Thermal resistance	EN ISO 10456	0.04m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔLw = 8dB

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

iD INSPIRATION Loose-lay

Main Product Features

- Tarkett exclusive anti-skid backing preventing sliding in all directions
- No permanent adhesive needed; fast and easy installation
- Excellent resistance to scratches and abrasion
- Excellent acoustic efficiency
- Superior indentation resistance

Surface Treatment




Sustainability Tag



Logistics Information

Available in planks and tiles



General Information



Beton




iD TILT



Granite - Grey



Granite




Grey

4697 005



Blue

4697 007



Black


4697 004



Red

4697 006

Concrete



Beige

24750 000



Grey

24750 001

TECHNICAL DATA	STANDARDS	iD TILT
Classification		
Type of floorcovering	EN ISO 10582	Modular heterogeneous product with interlocking connection
CE certification	EN 14041	Yes
Classification	EN ISO 10874 - EN 685	Commercial: 34 Industrial: 43
Characteristics		
Total thickness	EN ISO 24346 - EN 428	5.0 mm
Wear layer thickness	EN ISO 24340 - EN 429	0.70 mm
Surface treatment (PUR)		Yes
Total weight/m ²	EN ISO 23997 - EN 430	8 000 g
Wear layer binder content	ISO 10582	Type I
Technical performance		
Dimensional stability	EN ISO 23999 - EN 434	< 0.15%
Reaction to fire	EN 13501-1	B _s -s1 over any wood derivative panel
Residual indentation	EN ISO 24343-1 - EN 433	< 0.10 mm
Furniture leg	ISO 16581 - EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Curl resultant to heat	ISO 23999 - EN 434	≤ 2 mm
Impact sound reduction	EN ISO 717-2	ΔL _w = 6 dB
Thermal resistance	EN ISO 10456	approx. 0.05 m ² K/W
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	EN ISO 26987 - EN 423	Not affected (0)
Slip resistance	EN 13893 DIN 51130	μ ≥ 0.30 DS R9
Electrostatic properties	EN 1815	< 2 kV on concrete R1 > 10 ⁹ Ω
Colours	EN 1081	Granit: 4 - Concrete: 3

Technical data in force upon the date of publication (02/2017).

The values correspond to laboratory tests (no in situ test) and are subject to modification. Tarkett's instructions regarding installation, cleaning and maintenance shall be observed. Please contact your local sales rep. for these instructions.



Dark Grey

24750 002

iD TILT Concrete & Granite

Main Product Features

- 7 designs and 2 formats to perfectly fit to your project
- Extreme connection resistance, for long-lasting performance in high traffic areas
- Easy and quick installation thanks to its interlocking connection (no glue, no click)
- Excellent value for money

Surface Treatment



Sustainability Tag



Logistics Information



Available in tile with interlocking connection system

Laying direction:
Checkboard pattern installation recommended (to mask the joints)

General Information



iD SQUARE





Patchwood - White & Tissé - Dark Grey

Tisse



Patine

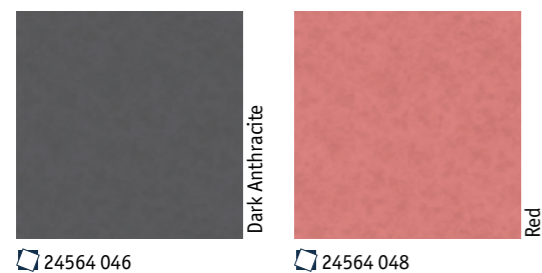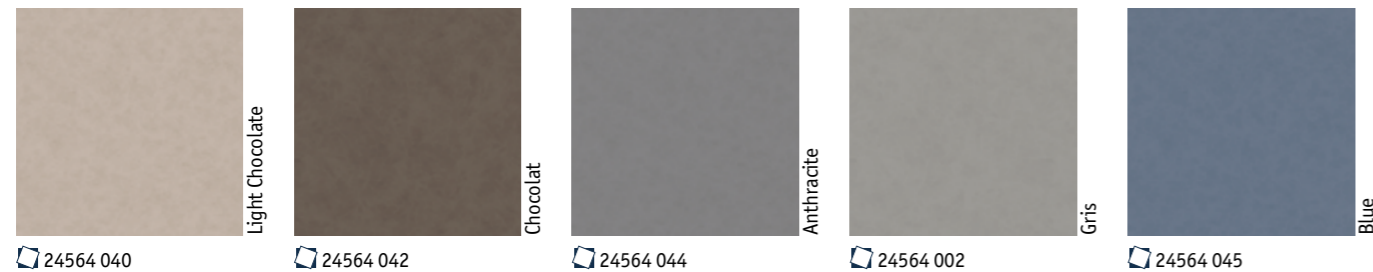

TECHNICAL DATA	STANDARDS	iD Square
Classification		
Type of floor covering	ISO 10582	Acoustic resilient floor covering
Classification	ISO 10874	Commercial: 34
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	4.50mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.80mm
Total weight	EN ISO 23997 (EN 430)	5 195g/m ²
Wear layer binder content	ISO 10582	Type I
Technical performance		
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0.10%
Reaction to fire	EN 13501-1	B _n s1 loose-laid or glued over any A2 _n or A1 _n substrate (concrete) C _n s1 loose-laid or glued over any derivate wood substrate
Residual indentation	Average measured value	0.15mm
	EN ISO 24343-1 (EN 433) requirement	≤ 0.20mm
Furniture leg	EN 424	No damage
Castor chair	EN ISO 4918	No damage
Reduction on transmitted impact noise	EN ISO 10140-3 EN ISO 717/2	ΔLW = 15 dB (± 1 dB)
Reduction of in room noise	NF S 31-074	Class B - L _{n,eq,T} < 75dB
Acoustic absorption	EN ISO 354 EN ISO 11654	α _w = 0.05
Thermal resistance	EN ISO 10456	0.04m ² K/W
Electrostratic properties	EN 1081	R ₁ > 10 ¹⁰ ohms
Light fastness	EN ISO 105-B02	≥ 6
Resistance to chemicals	EN ISO 26987	Not affected (0)
Antislip classification	EN 13893 DIN 51130	≥ 0.30 R9

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

iD SQUARE

Main Product Features

- No permanent adhesive needed; fast and easy installation
- Excellent resistance to scratches and abrasion
- Excellent resistance to scuffing, soiling and staining
- Excellent acoustic efficiency (15dB)
- Superior indentation resistance

Surface Treatment



Sustainability Tag



Logistics Information

Available in tiles and planks:



General Information



Tisse



24560 032



iD SQUARE



Minimal Wood - Natural, Grey, Dashes, Blue



Zen



Brown

24560 014



Grey

24560 022

Patchwood



White

24563 200



Grey

24563 201

Minimal Wood



Natural

24563 100
24567 100



Dark Grey

24563 102
24567 102

Plateau Ash



Grey

24563 009
24567 009

280

TECHNICAL DATA	STANDARDS	iD Square
Classification		
Type of floor covering	ISO 10582	Acoustic resilient floor covering
Classification	ISO 10874	Commercial: 34
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	4.50mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.80mm
Total weight	EN ISO 23997 (EN 430)	5 195g/m ²
Wear layer binder content	ISO 10582	Type I
Technical performance		
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0.10%
Reaction to fire	EN 13501-1	B _n s1 loose-laid or glued over any A2 _n or A1 _n substrate (concrete) C _n s1 loose-laid or glued over any derivate wood substrate
Residual indentation	Average measured value	0.15mm
	EN ISO 24343-1 (EN 433) requirement	≤ 0.20mm
Furniture leg	EN 424	No damage
Castor chair	EN ISO 4918	No damage
Reduction on transmitted impact noise	EN ISO 10140-3 EN ISO 717/2	ΔLW = 15 dB (± 1 dB)
Reduction of in room noise	NF S 31-074	Class B - L _{n,eq,T} < 75dB
Acoustic absorption	EN ISO 354 EN ISO 11654	α _w = 0.05
Thermal resistance	EN ISO 10456	0.04m ² K/W
Electrostatic properties	EN 1081	R _t > 10 ¹⁰ ohms
Light fastness	EN ISO 105-B02	≥ 6
Resistance to chemicals	EN ISO 26987	Not affected (0)
Antislip classification	EN 13893 DIN 51130	≥ 0.30 R9

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

iD SQUARE

Main Product Features

- No permanent adhesive needed; fast and easy installation
- Excellent resistance to scratches and abrasion
- Excellent resistance to scuffing, soiling and staining
- Excellent acoustic efficiency (15dB)
- Superior indentation resistance

Surface Treatment




Sustainability Tag



Logistics Information

Available in tiles and planks:



25 x 100cm



Laying direction:

Square tiles

General Information



Minimal Wood



Grey

24563 101
24567 101




iD SQUARE



Dashes - Grey, Light Grey, Purple, Green


Dashes

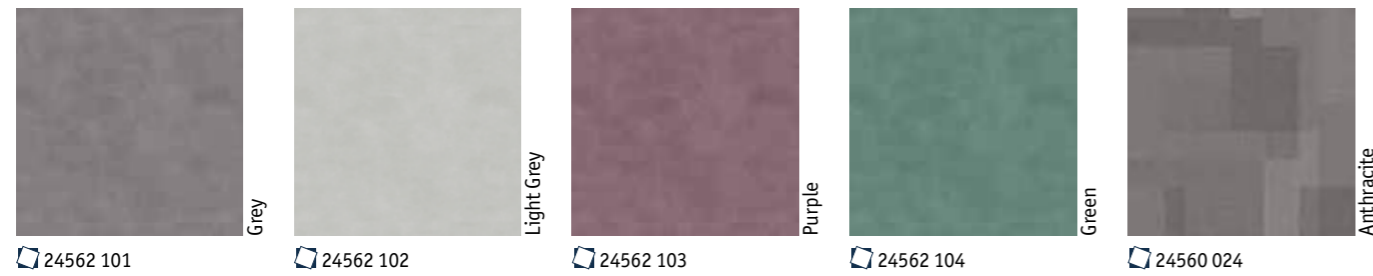

Vintage Zinc



Grid

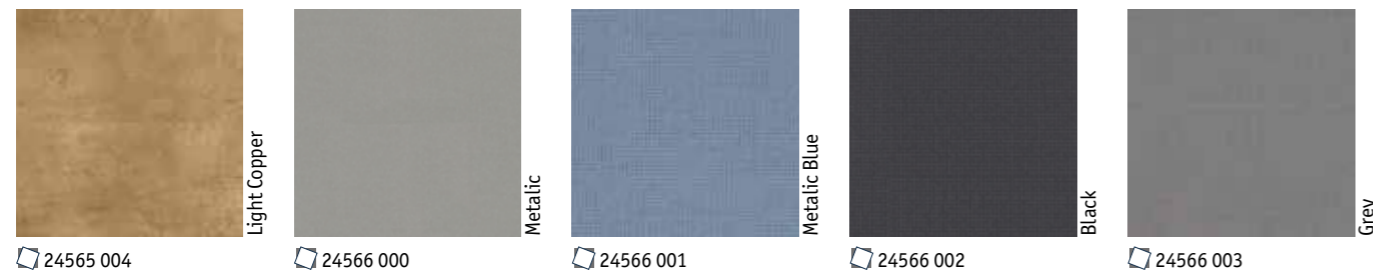

TECHNICAL DATA	STANDARDS	iD Square
Classification		
Type of floor covering	ISO 10582	Acoustic resilient floor covering
Classification	ISO 10874	Commercial: 34
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	4.50mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.80mm
Total weight	EN ISO 23997 (EN 430)	5 195g/m ²
Wear layer binder content	ISO 10582	Type I
Technical performance		
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0.10%
Reaction to fire	EN 13501-1	B _n s1 loose-laid or glued over any A2 _n or A1 _n substrate (concrete) C _n s1 loose-laid or glued over any derivate wood substrate
Residual indentation	Average measured value	0.15mm
	EN ISO 24343-1 (EN 433) requirement	≤ 0.20mm
Furniture leg	EN 424	No damage
Castor chair	EN ISO 4918	No damage
Reduction on transmitted impact noise	EN ISO 10140-3 EN ISO 717/2	ΔLW = 15 dB (± 1 dB)
Reduction of in room noise	NF S 31-074	Class B - L _{n,eq,T} < 75dB
Acoustic absorption	EN ISO 354 EN ISO 11654	α _w = 0.05
Thermal resistance	EN ISO 10456	0.04m ² K/W
Electrostratic properties	EN 1081	R _t > 10 ¹⁰ ohms
Light fastness	EN ISO 105-B02	≥ 6
Resistance to chemicals	EN ISO 26987	Not affected (0)
Antislip classification	EN 13893 DIN 51130	≥ 0.30 R9

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

iD SQUARE

Main Product Features

- No permanent adhesive needed; fast and easy installation
- Excellent resistance to scratches and abrasion
- Excellent resistance to scuffing, soiling and staining
- Excellent acoustic efficiency (15dB)
- Superior indentation resistance

Surface Treatment



Sustainability Tag



Logistics Information

Available in tiles and planks:



Dashes



General Information



LIGHT & MODERATE TRAFFIC LVT GLUE-DOWN



The comprehensive decorative solution for domestic interiors

SENSORY BENEFITS

- Coordinated colours and patterns
- A large choice of designs
- Personalise every aspect of your project using feature lines and matching skirtings

FUNCTIONAL BENEFITS


- High resistance with 0.30mm transparent wear-layer
- Easy to maintain

ENVIRONMENTAL BENEFITS

- Low VOC emissions contribute to better indoor air quality
- 100% recyclable
- Phthalate-free technology



iD ESSENTIAL

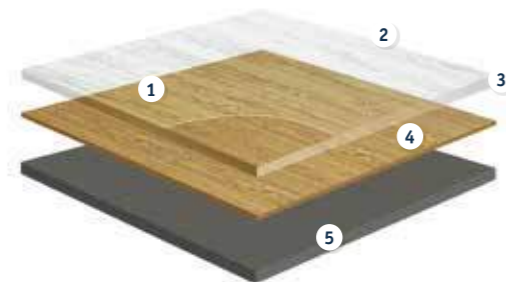

- 1 **Surface embossing:**
textures close to real materials
- 2 **TopClean™ PUR reinforcement:**
extreme resistance and easy low-cost maintenance
- 3 **0.30mm pure PVC transparent wear layer:**
exceptionally hard-wearing and indentation resistant
- 4 **42 different design options**
- 5 **Calandered PVC backing**

TECHNICAL DATA	STANDARDS	iD Essential
Classification		
Classification	EN ISO 10874 (EN 685) domestic commercial	Classes: 23 31
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	2.00mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.30mm
Total weight	EN ISO 23997 (EN 430)	3 400g/m ²
PUR treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Residual indentation	Average measured value	0.03mm
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	B _r s1 over any wood derivative panel
Slip resistance	DIN 51130 EN 13893	R9
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0.25%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 2.00mm
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	EN ISO 26987 (EN 423)	Good resistance
Thermal resistance Underfloor heating	EN ISO 10456	0.07m ² K/W Suitable - max. 27°C
Light fastness	EN ISO 105-B02	≥ 6
Form of delivery		
Form of delivery	EN ISO 24342 (EN 427)	Planks: 22.9 x 121.9cm 15.2 x 91.4cm Tiles: 30.5 x 61cm
Colours		
Colours		Wood: 35 - Ceramic: 7

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.



iD ESSENTIAL



Soft Oak - Beige

Smoked Oak



Soft Oak



Aspen Oak



TECHNICAL DATA	STANDARDS	iD Essential
Classification		
Classification	EN ISO 10874 (EN 685) domestic commercial	Classes: 23 31
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	2.00mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.30mm
Total weight	EN ISO 23997 (EN 430)	3 400g/m ²
PUR treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Residual indentation	Average measured value	0.03mm
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	B _f s1 over any wood derivative panel
Slip resistance	DIN 51130 EN 13893	R9
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0.25%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 2.00mm
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	EN ISO 26987 (EN 423)	Good resistance
Thermal resistance Underfloor heating	EN ISO 10456	0.07m ² K/W Suitable - max. 27°C
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

Aspen Oak



iD ESSENTIAL XL Woods

Main Product Features

- Best value for money
- Resistant product with 0.30mm transparent wear-layer
- TopClean™ surface protection for great resistance and easy cleaning
- Choose the natural look of Country Oak designs, featuring a registered embossing - feels like wood !

Surface Treatment




Sustainability Tag



Logistics Information

Available in planks



Laying direction:



General Information



According to European
Classification ISO 10874 (EN 685)

iD ESSENTIAL



Cerused Oak - Beige



Washed Pine



Cerused Oak




Primary Pine



TECHNICAL DATA	STANDARDS	iD Essential
Classification		
Classification	EN ISO 10874 (EN 685) domestic commercial	Classes: 23 31
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	2.00mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.30mm
Total weight	EN ISO 23997 (EN 430)	3 400g/m ²
PUR treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Residual indentation	Average measured value	0.10mm
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	B _n s1 over any wood derivative panel
Slip resistance	DIN 51130 EN 13893	R9
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0.25%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 2.00mm
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	EN ISO 26987 (EN 423)	Good resistance
Thermal resistance Underfloor heating	EN ISO 10456	0.07m ² K/W Suitable - max. 27°C
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

Country Oak

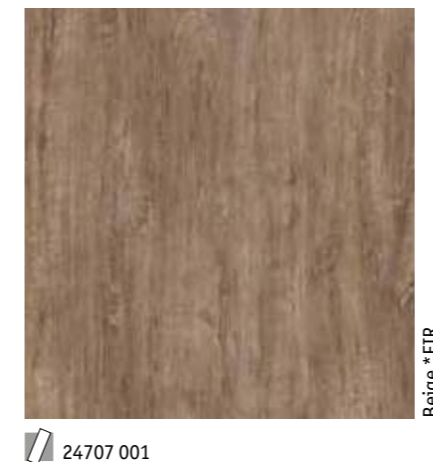

iD ESSENTIAL XL Woods + EIR XL Woods

Main Product Features

- Best value for money
- Resistant product with 0.30mm transparent wear-layer
- TopClean™ surface protection for great resistance and easy cleaning
- Large oak and pine designs choice
- Emboss in register (see selection marked with *EIR)
- Choose the natural look of Country Oak designs, featuring a registered embossing - feels like wood !

Surface Treatment



Sustainability Tag



Logistics Information

Available in planks



Laying direction:



General Information



According to European Classification ISO 10874 (EN 685)

iD ESSENTIAL



Venezia - Grey



Venezia



Grey


3979 001



Beige

3979 002

Sandstone



Black

3979 004



Brown

3979 005


Scratched Metal



Grey


3979 008

Original Slate



Black

3979 006



Grey

3979 007


Walnut



Light Brown

3976 034

Beech



Natural

3976 020

Maple



Natural

3976 031

TECHNICAL DATA	STANDARDS	iD Essential
Classification		
Classification	EN ISO 10874 (EN 685) domestic commercial	Classes: 23 31
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	2.00mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.30mm
Total weight	EN ISO 23997 (EN 430)	3 400g/m ²
PUR treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Residual indentation	Average measured value	0.03mm
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	B _{s1} s1 over any wood derivative panel
Slip resistance	DIN 51130 EN 13893	R9
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0.25%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 2.00mm
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	EN ISO 26987 (EN 423)	Good resistance
Thermal resistance Underfloor heating	EN ISO 10456	0.07m ² K/W Suitable - max. 27°C
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

iD ESSENTIAL Woods & Stones

Main Product Features

- Best value for money
- Resistant product with 0.30mm transparent wear-layer
- TopClean™ surface protection for great resistance and easy cleaning
- Choose the natural look of Country Oak designs, featuring a registered embossing - feels like wood !

Surface Treatment




Sustainability Tag



Logistics Information

Available in planks



Laying direction:



General Information



According to European Classification ISO 10874 (EN 685)

LIGHT & MODERATE TRAFFIC LVT CLICK



The ideal choice
for new build
and renovation
in domestic
environments

SENSORY BENEFITS

- Coordinated colours and designs
- Matching skirtings for a perfect finish
- Range of stylish accessories available

FUNCTIONAL BENEFITS


- Little or no subfloor preparation required
- Click system enables floating installation without glue
- Quicker to install
- Easier and cheaper to renovate - can be removed without damaging the subfloor
- Acoustic reduction of 13dB with Tarkomfort Pro underlayer

ENVIRONMENTAL BENEFITS

- Low VOC emissions contribute to better indoor air quality
- No glue required
- Phthalate-free technology

TECHNICAL DATA	STANDARDS	iD Essential Click
Classification		
Type of floor covering	EN ISO 10582	Compact Resilient Floorcovering
Classification	EN ISO 10874 (EN 685) commercial residential	Classes: 31 23
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	4.00mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.30mm
Total weight	EN ISO 23997 (EN 430)	7 400g/m ²
PU treatment	—	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Impact sound reduction	EN ISO 717/2	$\Delta L_w = 5\text{dB}$ 13dB with Tarkomfort Pro underlayer
Acoustic improvement	NF S31-074	78dB (Class C - $L_{n,e,w} < 85\text{dB}$)
Residual indentation	EN ISO 24343-1 (EN 433)	0.08mm
Reaction to fire	EN 13501-1	$B_{fl} -s1$ loose laid on concrete and on wood
Slip resistance	DIN 51130 EN 13893	R10 (planks) / R9 (tiles) $\mu \geq 0,30$
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	EN ISO 23999 (EN 434)	$\leq 2.00\text{mm}$
Electrostatic properties	EN 1081 EN 1815	> 2 kV on concrete $R1 > 10^9$ Ohms
Resistance to chemicals	EN ISO 26987 (EN 423)	Not affected (0)
Thermal resistance Underfloor heating	EN ISO 10456	0.03m ² K/W
Light fastness	EN ISO 105-B02	≥ 6
Form of delivery		
	EN ISO 24342 (EN 427)	Planks: 18.3 x 122cm Tiles: 31 x 60,3cm

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

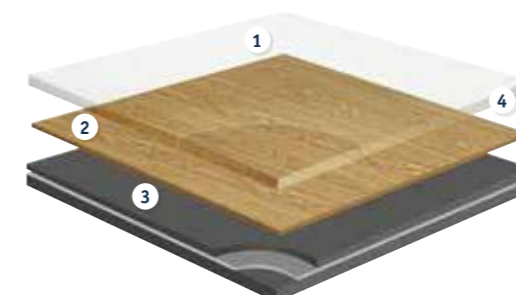

iD ESSENTIAL CLICK

- 1 Top surface treatment
- 2 Design printed PVC film
- 3 PVC Compact backing and middle layers
- 4 ULTRA TOUGH TRANSPARENT PVC wear layer




iD ESSENTIAL CLICK



Limewashed Oak - Brown




Limewashed Oak*



Beige

24722 000



Brown

24722 001

Delicate Oak



Natural

24722 002

Toasted Oak



Light Natural

24722 003



Dark Grey

24722 004

Stone



Grey

24723 000

Rust Metal



Brown

24723 001



Black

24723 002

* For the Limewashed Oak design, the color may vary from one plank to another.

TECHNICAL DATA	STANDARDS	iD Essential Click
Classification		
Type of floor covering	EN ISO 10582	Compact Resilient Floorcovering
Classification	EN ISO 10874 (EN 685) commercial residential	Classes: 31 23
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	4.00mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.30mm
Total weight	EN ISO 23997 (EN 430)	7 400g/m ²
PU treatment	—	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Impact sound reduction	EN ISO 717/2	ΔLw = 5dB 13dB with Tarkomfort Pro underlayer
Acoustic improvement	NF S31-074	78dB (Class C - L _{n,e,w} < 85dB)
Residual indentation	EN ISO 24343-1 (EN 433)	≤ 0.08mm
Reaction to fire	EN 13501-1	B _f -s1 loose laid on concrete and on wood
Slip resistance	DIN 51130 EN 13893	R10 (planks) / R9 (tiles) μ ≥ 0,30
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm
Electrostatic properties	EN 1081 EN 1815	> 2 kV on concrete R1 > 10 ⁹ Ohms
Resistance to chemicals	EN ISO 26987 (EN 423)	Not affected (0)
Thermal resistance Underfloor heating	EN ISO 10456	0.03m ² K/W
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

iD ESSENTIAL CLICK

Main Product Features

- Top Clean™ surface protection for resistance and easy cleaning
- Excellent indentation resistance
- Excellent acoustic performances (up to 13 dB with Tarkomfort Pro underlayer)
- Perfect colour-matched skirtings for a perfect finish

Surface Treatment




Sustainability Tag



Logistics Information

Available in planks or tiles



Laying direction:



General Information



According to European Classification ISO 10874 (EN 685)

