

LUXURY
VINYL
TILES

2017 COLLECTIONS

FLOOR
IS THE NEW
PLAYGROUND



THE ULTIMATE
FLOORING EXPERIENCE



LUXURY
VINYL
TILES

FLOOR IS THE NEW PLAYGROUND

Rules have changed and flooring increasingly plays a leading role in creating highly individual spaces. The floor is the solid base that your creation builds on. It sets the tone, bringing architecture and design to life. By using the floor as your signature you'll create a distinctive atmosphere and a unique visitor experience. Outstanding modularity. Simple layout. Easy installation. Tarkett LVT ranges open up possibilities that are as infinite as your imagination.

Unleash your creativity with Tarkett LVT, because Floor Is The New Playground.

SUMMARY

Glue-down:


iD Inspiration 55-70	04
iD Inspiration 40	22
iD Essential 30	32

Click:

iD Inspiration Click	42
iD Essential Click	52

Loose-lay:

iD Inspiration Loose-Lay	30
iD Square	68
iD Tilt	78

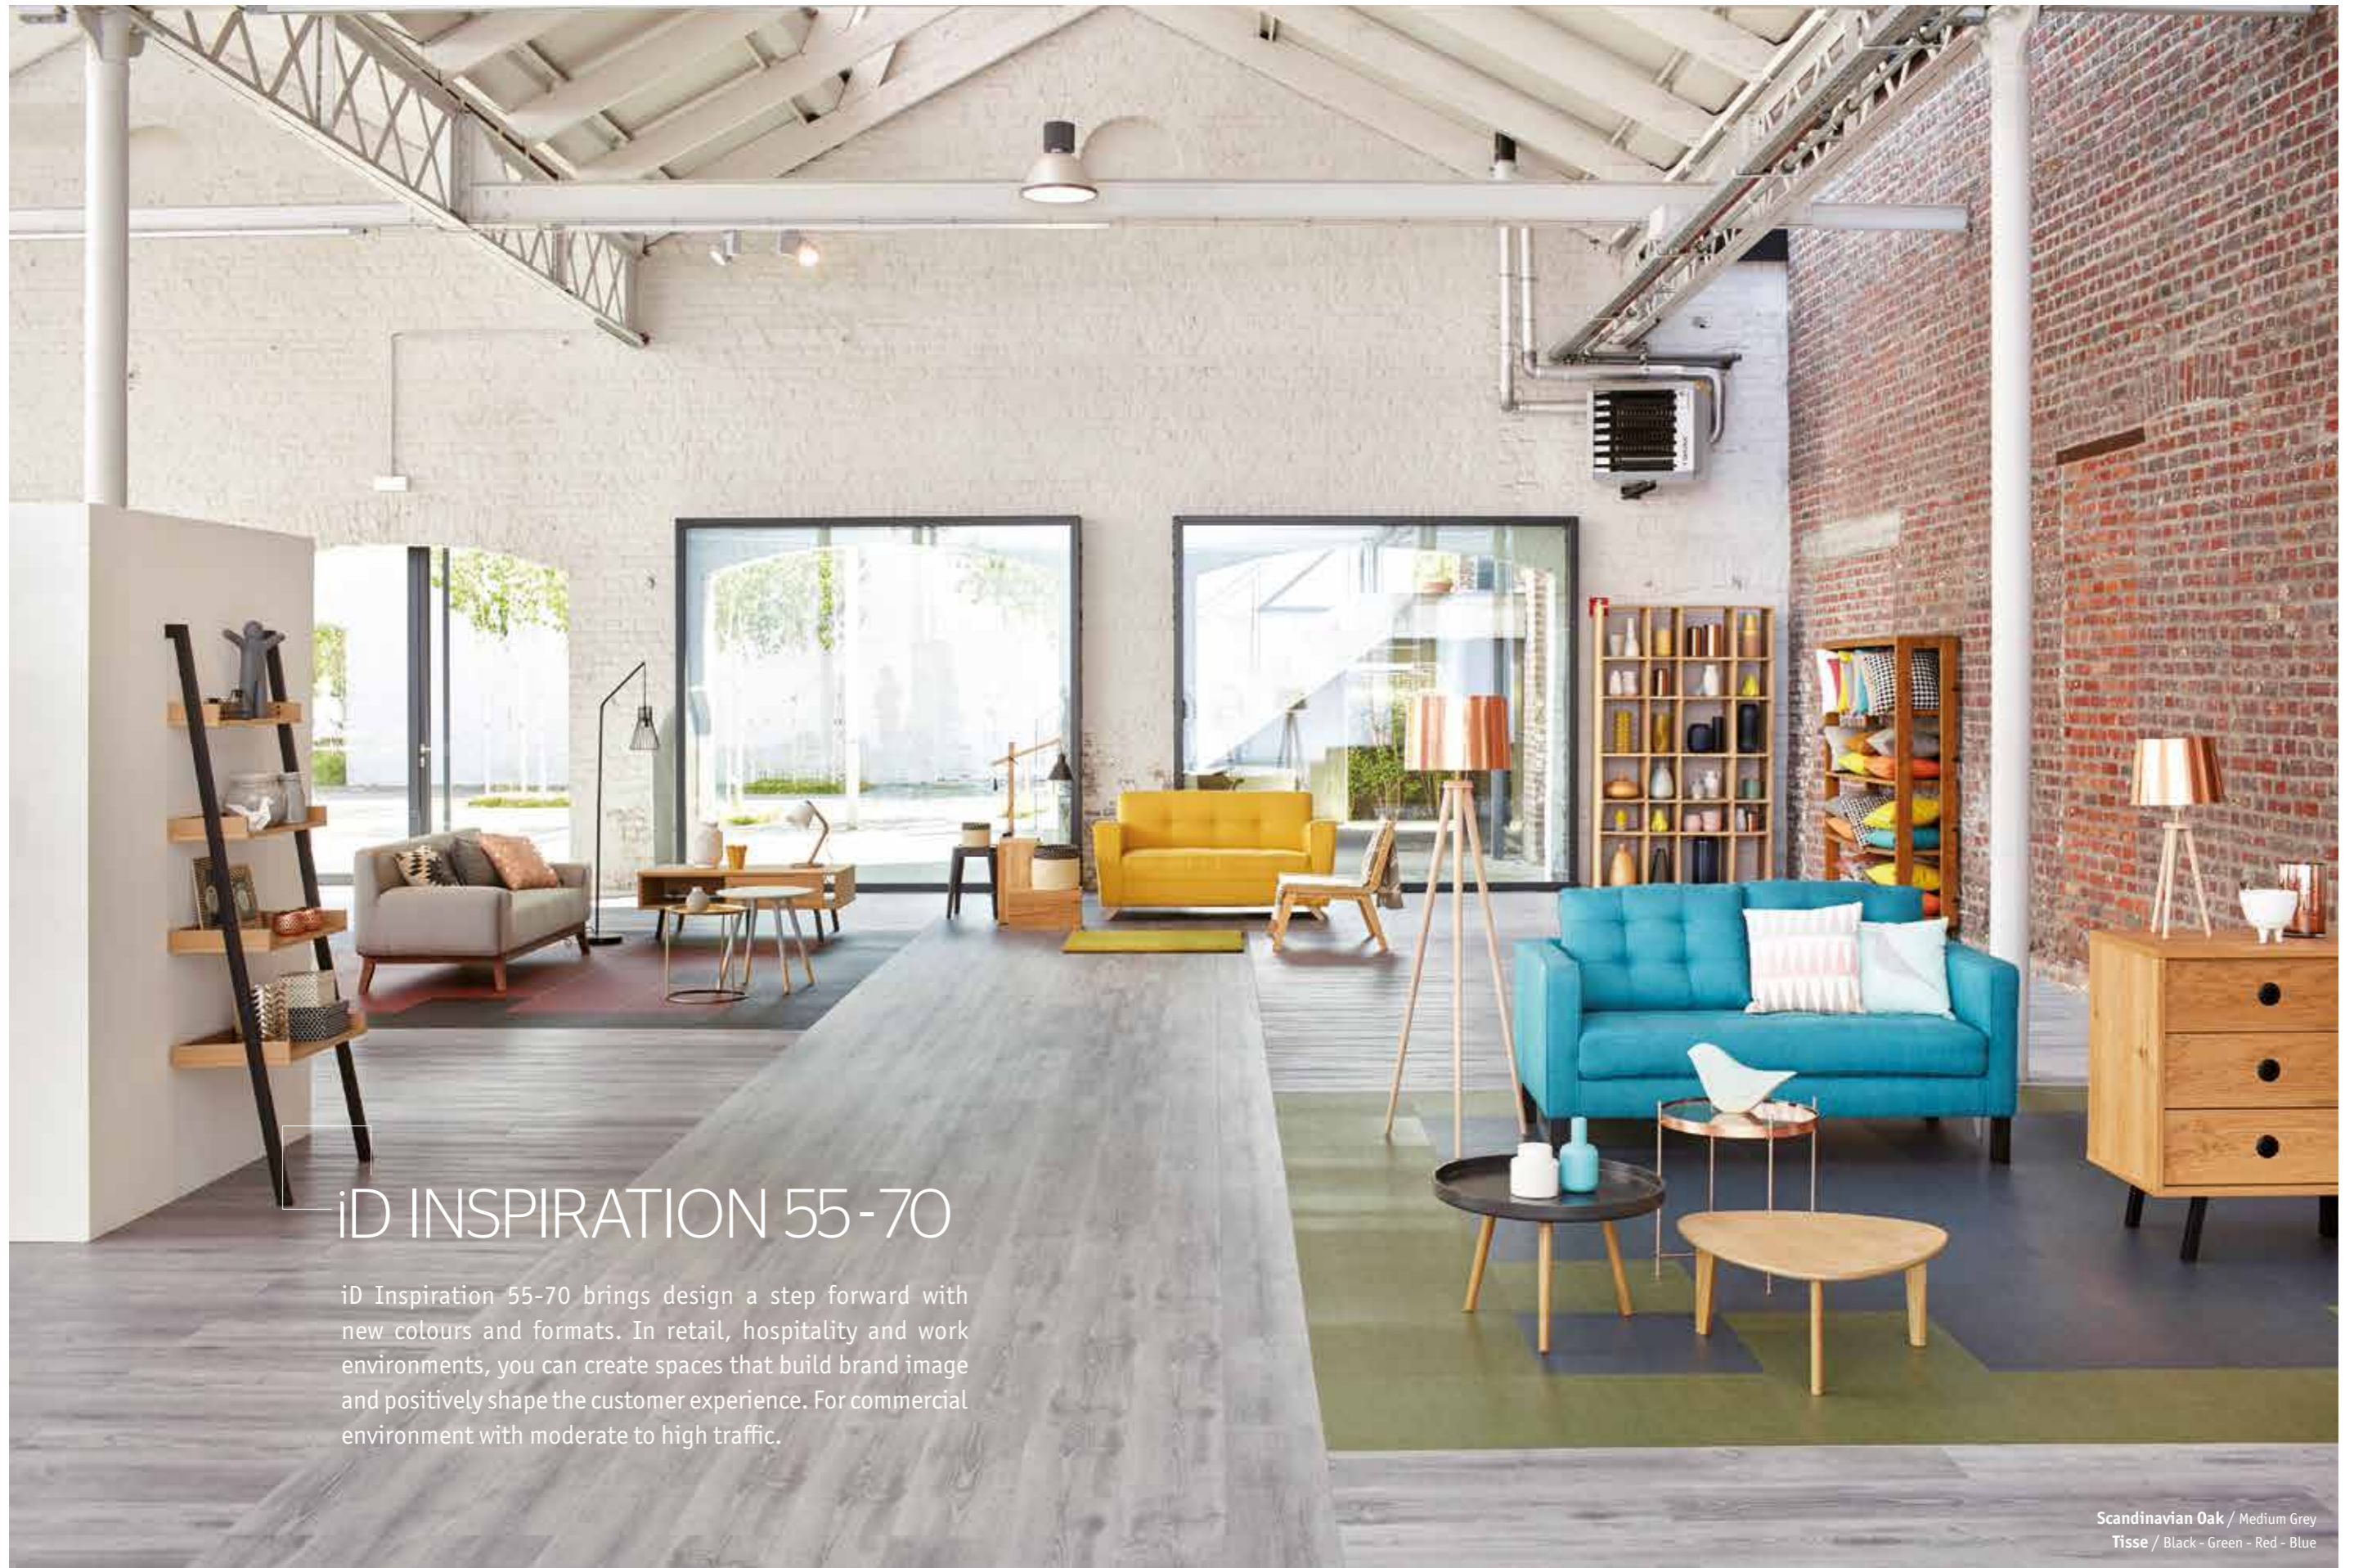

iD INSPIRATION 55-70

iD Inspiration 55-70 brings design a step forward with new colours and formats. In retail, hospitality and work environments, you can create spaces that build brand image and positively shape the customer experience. For commercial environment with moderate to high traffic.

Scandinavian Oak / Medium Grey
Tisse / Black - Green - Red - Blue

iD INSPIRATION 55-70

4 NEW FORMATS

- 12.5 x 122 cm
- 25 x 50 cm
- 50 x 100 cm
- 100 x 100 cm

FULLY CUSTOMIZABLE COLLECTION

- iD Inspiration offers endless combinations through your choice of format, design, surface structure and beveling. Every aspect of the product is customizable with all decors.

IMPROVED BEVELS

- A new cutting process makes for a cleaner, more realistic bevel.

LIFE-LONG PERFORMANCE

- Highly resistant to the daily wear and tear of even the most demanding commercial areas.
- 10 years limited guarantee for commercial use and 15 years limited guarantee for residential use.


ACCESSORY PACKAGES

- Comes with a complete range of accessories for user safety, efficient installation and project completion.
- Quick and easy installation for a long-lasting solution.

A SUSTAINABLE SOLUTION




Helps improve indoor air quality with VOC emissions below quantifiable levels, under $10\mu\text{g}/\text{m}^3$ after 28 days (10 times below the official standards level).



100% recyclable & composed of 32% of recycled components.



Phthalate-free technology based on alternative plasticizers.



Made in Europe to benefit from our best-in-class industrial expertise.



Scandinavian Oak / Medium Grey
Tisse / Black - Green - Red - Blue

Antik Oak



iD 70: 24201 001 **iD 70:** 24201 005 **iD 70:** 24201 004 **iD 70:** 24201 006 **iD 70:** 24201 008 **iD 70:** 24201 003
iD 55: 24231 001 **iD 55:** 24231 005 **iD 55:** 24231 004 **iD 55:** 24231 006 **iD 55:** 24231 008 **iD 55:** 24231 003

Contemporary Oak




iD 70: 24201 109 **iD 70:** 24201 110 **iD 70:** 24201 111 **iD 70:** 24201 112
iD 55: 24231 109 **iD 55:** 24231 110 **iD 55:** 24231 111 **iD 55:** 24231 112

Antik Oak



iD 70: 24201 002 **iD 70:** 24201 007
iD 55: 24231 002 **iD 55:** 24231 007

Rustic Oak

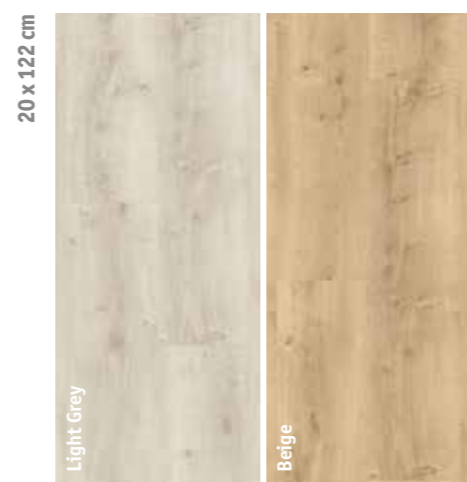

iD 70: 24201 124 **iD 70:** 24201 126
iD 55: 24231 124 **iD 55:** 24231 126

Elm



iD 70: 24201 113 **iD 70:** 24201 114 **iD 70:** 24201 115 **iD 70:** 24201 116 **iD 70:** 24201 117
iD 55: 24231 113 **iD 55:** 24231 114 **iD 55:** 24231 115 **iD 55:** 24231 116 **iD 55:** 24231 117

Brushed Pine



iD 70: 24201 016 **iD 70:** 24201 014 **iD 70:** 24201 015 **iD 70:** 24201 013
iD 55: 24231 016 **iD 55:** 24231 014 **iD 55:** 24231 015 **iD 55:** 24231 013

English Oak




iD 70: 24201 028 **iD 70:** 24201 029 **iD 70:** 24201 024 **iD 70:** 24201 026 **iD 70:** 24201 027 **iD 70:** 24201 025
iD 55: 24231 028 **iD 55:** 24231 029 **iD 55:** 24231 024 **iD 55:** 24231 026 **iD 55:** 24231 027 **iD 55:** 24231 025

iD INSPIRATION 55-70

WOOD

WOOD

Pallet Pine

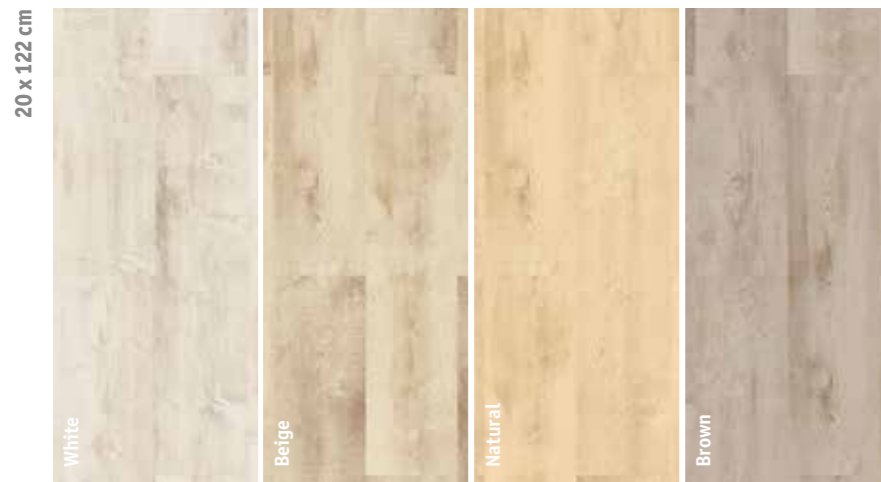

White
iD 70: 24201 030 **iD 55:** 24231 030
Beige
iD 70: 24201 031 **iD 55:** 24231 031
Natural
iD 70: 24201 032 **iD 55:** 24231 032
Brown
iD 70: 24201 033 **iD 55:** 24231 033

Scandinavia Oak




Light Beige
iD 70: 24201 100 **iD 55:** 24231 100
Medium Beige
iD 70: 24201 127 **iD 55:** 24231 127
Dark Beige
iD 70: 24201 102 **iD 55:** 24231 102
Light Grey
iD 70: 24201 103 **iD 55:** 24231 103
Medium Grey
iD 70: 24201 104 **iD 55:** 24231 104
Dark Grey
iD 70: 24201 105 **iD 55:** 24231 105

Patina Ash



Beige
iD 70: 24201 106 **iD 55:** 24231 106
Grey
iD 70: 24201 108 **iD 55:** 24231 108
Brown
iD 70: 24201 107 **iD 55:** 24231 107

Trend Line

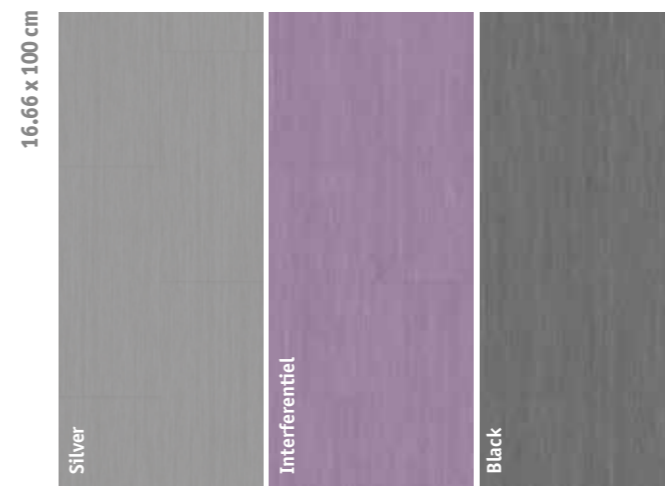


Silver
iD 70: 24205 090 **iD 55:** 24235 090
Interferentiel
iD 70: 24205 089 **iD 55:** 24235 089
Black
iD 70: 24205 088 **iD 55:** 24235 088

Vintage Teak



Grey
iD 70: 24201 092 **iD 55:** 24231 092
Natural
iD 70: 24201 093 **iD 55:** 24231 093

Rustic Oak

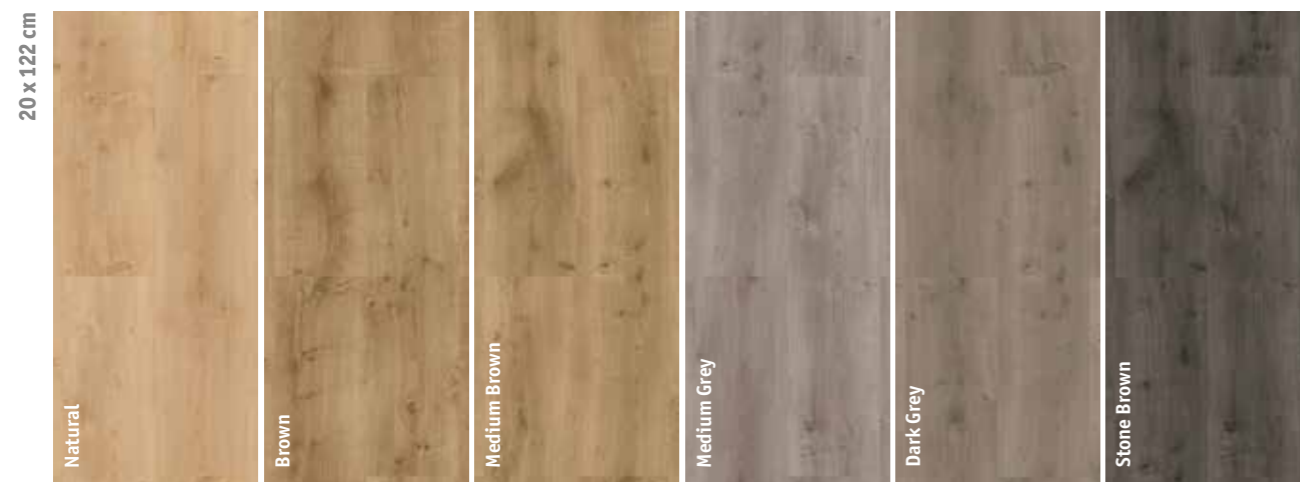

Natural
iD 70: 24201 125 **iD 55:** 24231 125
Brown
iD 70: 24201 127 **iD 55:** 24231 127
Medium Brown
iD 70: 24201 128 **iD 55:** 24231 128
Medium Grey
iD 70: 24201 123 **iD 55:** 24231 123
Dark Grey
iD 70: 24201 122 **iD 55:** 24231 122
Stone Brown
iD 70: 24201 121 **iD 55:** 24231 121

Wenge



Grege
iD 70: 24205 012 **iD 55:** 24235 012
Grey
iD 70: 24205 011 **iD 55:** 24235 011
Black
iD 70: 24205 009 **iD 55:** 24235 009
Natural
iD 70: 24205 010 **iD 55:** 24235 010

iD INSPIRATION 55-70

AUTHENTIC STONES

Bardiglio




AUTHENTIC STONES


Rock



Composite

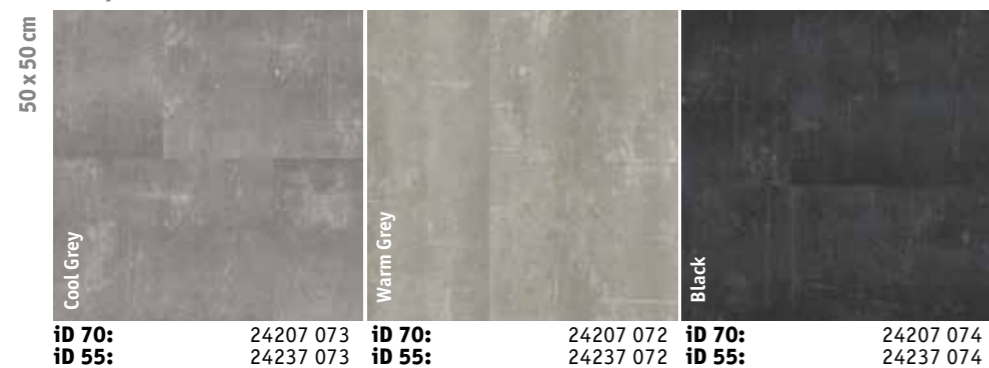


Rock

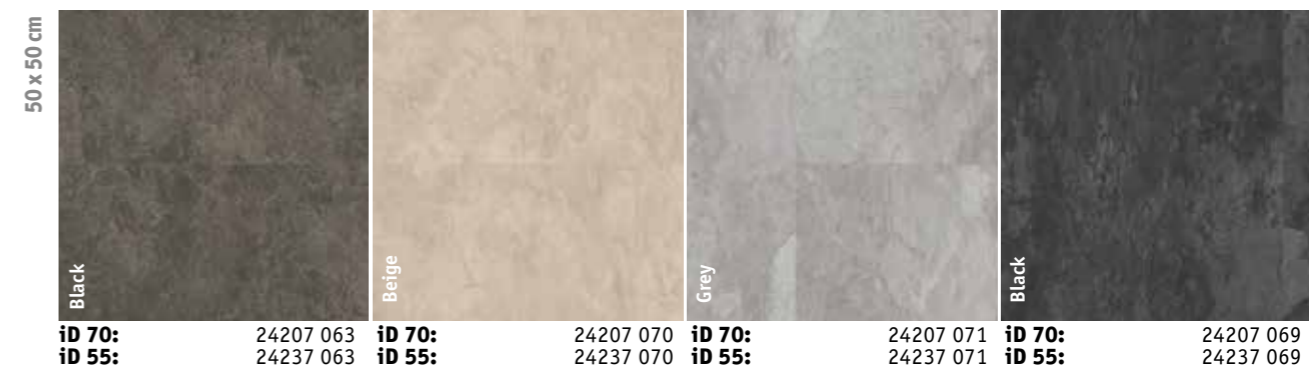


Rustic Slate

Polished Concrete

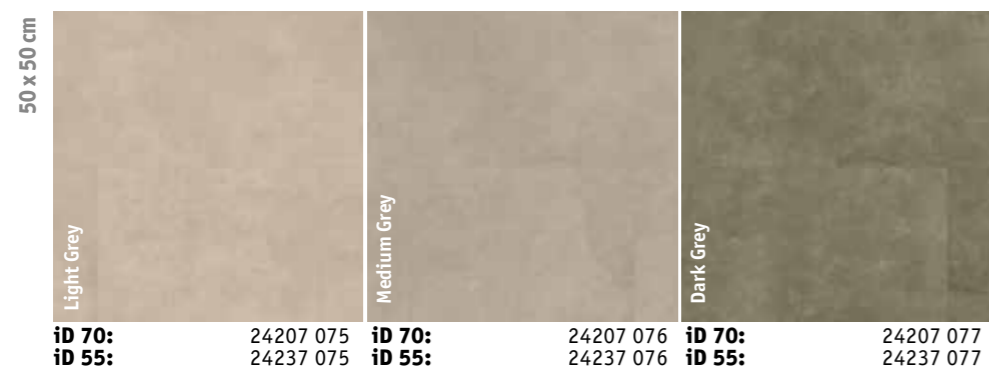


Terrazzo

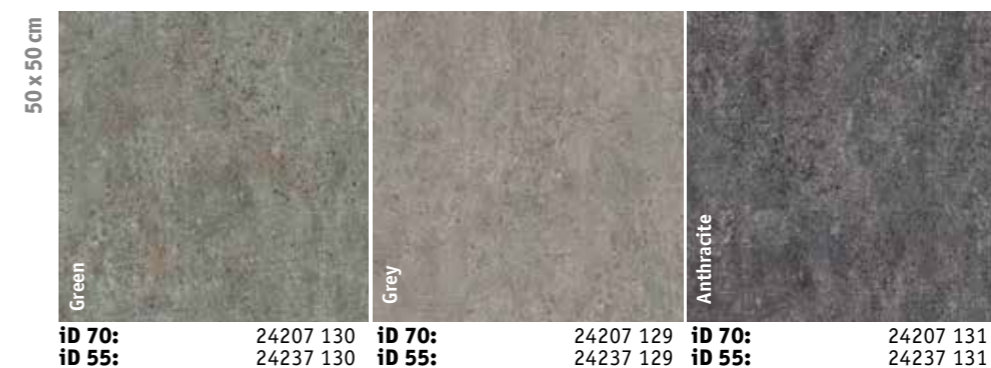


iD INSPIRATION 55-70

MATERIAL EFFECTS

Caviar

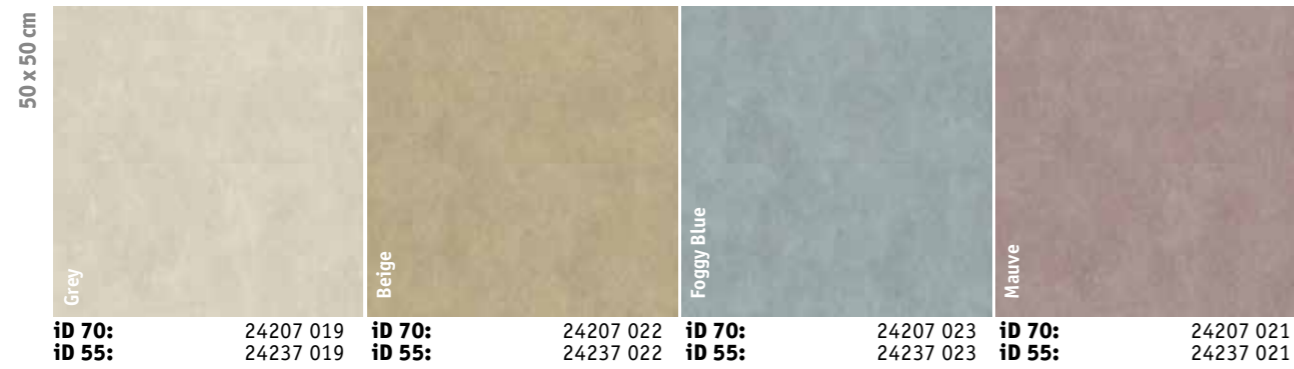


Tisse

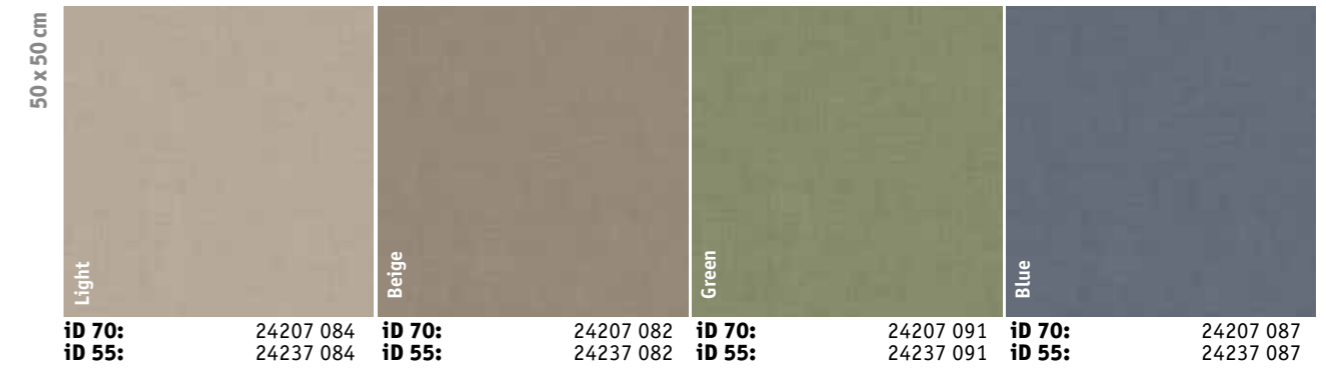


MATERIAL EFFECTS


Caviar

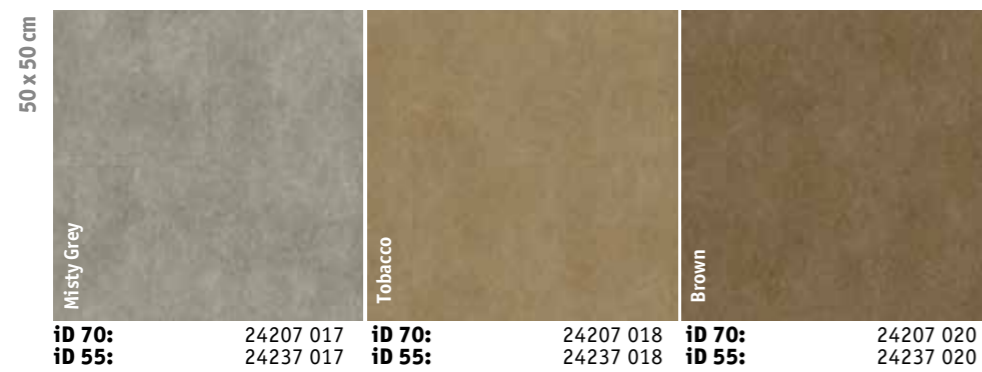


Tisse

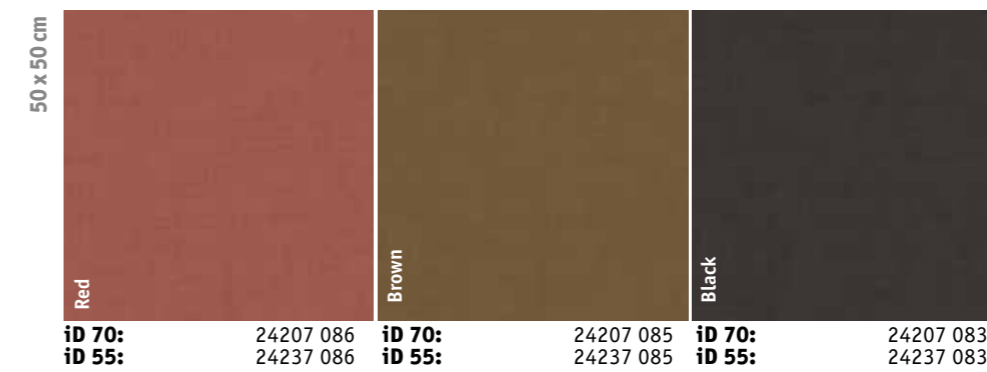

Oxide

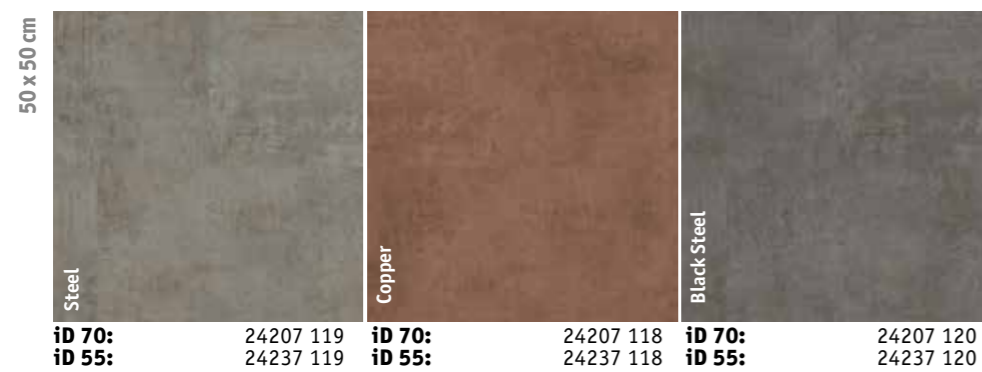

Vintage Zinc

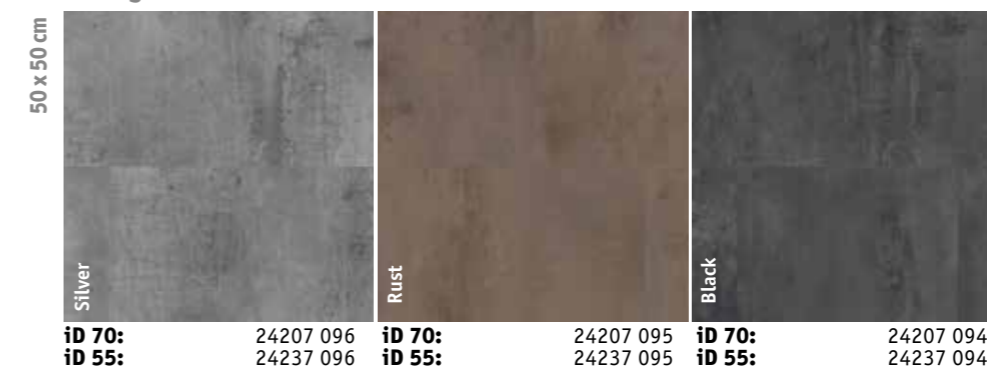

iD INSPIRATION 55-70

MATERIAL EFFECTS

Twine

50 x 50 cm

Light Grey	Medium Grey	Blue Grey	Purple
iD 70: 24207 038 iD 55: 24237 038	iD 70: 24207 039 iD 55: 24237 039	iD 70: 24207 041 iD 55: 24237 041	iD 70: 24207 045 iD 55: 24237 045

Twine

50 x 50 cm

Turquoise	Denim	Indigo	Dark Grey
iD 70: 24207 042 iD 55: 24237 042	iD 70: 24207 043 iD 55: 24237 043	iD 70: 24207 044 iD 55: 24237 044	iD 70: 24207 040 iD 55: 24237 040

Metal Frame

50 x 50 cm

Rose	Platinum	Aluminium	Stainless
iD 70: 24207 019 iD 55: 24237 019	iD 70: 24207 022 iD 55: 24237 022	iD 70: 24207 023 iD 55: 24237 023	iD 70: 24207 021 iD 55: 24237 021

DESIGN EFFECTS

iD INSPIRATION 55-70


FEATURE STRIP COLOURS

Create visual effects with contrasts of colours to highlight interior features, shape perceptions of a room size or personalise your flooring design.

BLACK	1421 001	RED	1421 010	TOBACCO	1421 008
DARK GREY	1421 009	COPPER	1421 012	SILVER	1421 002
ROYAL BLUE	1421 011	GOLD	1421 003	EGGSHELL	1421 013




ACCESSORIES



PVC DECORATIVE SKIRTING


- Compact skirting with decorative film and PUR surface treatment to perfectly match all designs
- 📦 2.02 lm skirting in packs x 10

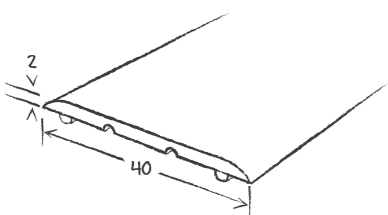

SELF-ADHESIVE TRANSITION PROFILE - MT40SA

Self-adhesive aluminium transition strip, for a perfect transition between different flooring materials


- Silver 1470 008
- 📦 10 units of 2.7 lm

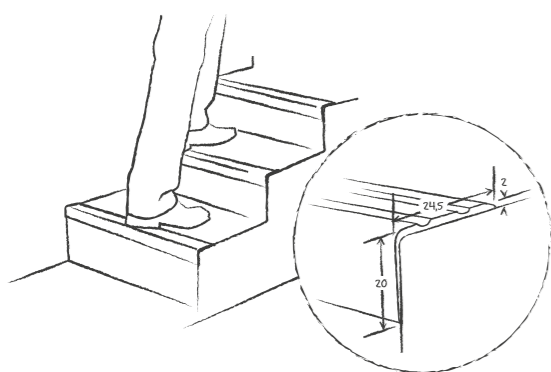

STAIRNOSE - MSN24SA

Aluminum stairnose, self-adhesive, to be screwed

- Silver 1480 008
- 📦 10 units of 2.7 lm

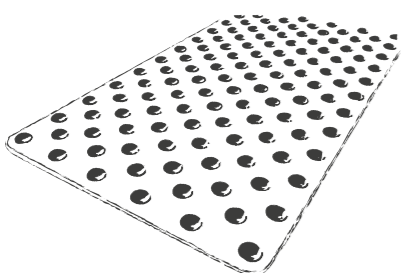

3D STUD

- Accessibility accessory
- Ready-to-use podotactile studs to be simply fitted on top of the existing floorcovering
- White 1440 050
- Grey 1440 051
- Black 1440 052
- Ivory 1440 053
- Red 1440 054
- Yellow 1440 055
- 📦 5mm x 25mm stud in packs x 200



Contemporary Oak / Grey - Grege - Brown

CUSTOMIZATION SERVICE

- Let our design team work with you !
This service enables you to add those special touches, such as company logos, graphics or design effects to your flooring choice. We can create unique designs built on your ideas or our designs catalogue.
- Classification 32, 33 or 34 (commercial)*
- Choose from a large possibility of materials: modular vinyl, vinyl rolls, linoleum

*Depending on your chosen base of resilient material




This bespoke design was created by FLOORCRAFT using sonic cut. Each cut was then individually assembled into panels.




3 POSSIBILITIES OF FLOORCRAFT STANDARD DESIGNS

COME IN THE 3 FOLLOWING COLOUR COMBINATIONS


Houndstooth



Polished Concrete
Dark Grey / Light Grey
24970





Oxide
Black Steel / Steel
24971



Twine
Medium Grey / Light Grey
24972

Stripes



Polished Concrete
Dark Grey / Light Grey
24973





Oxide
Black Steel / Steel
24974




Twine
Medium Grey / Light Grey
24975


Vintage



Polished Concrete
Dark Grey / Light Grey
24976



Oxide
Black Steel / Steel
24977



Twine
Medium Grey / Light Grey
24978

25cm x 25cm tiles of your requested order

No minimum order quantity



iD INSPIRATION 40

iD Inspiration 40's versatile design and durability make it a great choice for commercial interiors. For hotels, offices and shops as well as aged-care environment, with light to moderate traffic.

White Oak / Light - Grey

iD INSPIRATION 40

DESIGN YOUR OWN FLOOR DECOR

- Get creative with a carefully chosen range of 34 colours and patterns plus a variety of plank and tile formats.

ACCESSORY PACKAGE

- Compact skirting with decorative film and PUR surface treatment to match all 34 designs.
- All accessories for user safety, stairs and transitions.

HARD WEARING AND EASY CLEANING

- Hygienic surface treated with the Tarkett unique TopClean XP coating that strengthens it, extends the life-cycle and simplifies cleaning and maintenance.

A SUSTAINABLE SOLUTION



Helps improve indoor air quality with VOC emissions below quantifiable levels, under $10\mu\text{g}/\text{m}^3$ after 28 days (10 times below the official standards level).



100% recyclable & composed of 36% of recycled components.



Phthalate-free technology based on alternative plasticizers.



Made in Europe to benefit from our best-in-class industrial expertise.



White Oak / Light - Grey

iD INSPIRATION 40


Antik Oak



Modern Oak



Brushed Pine

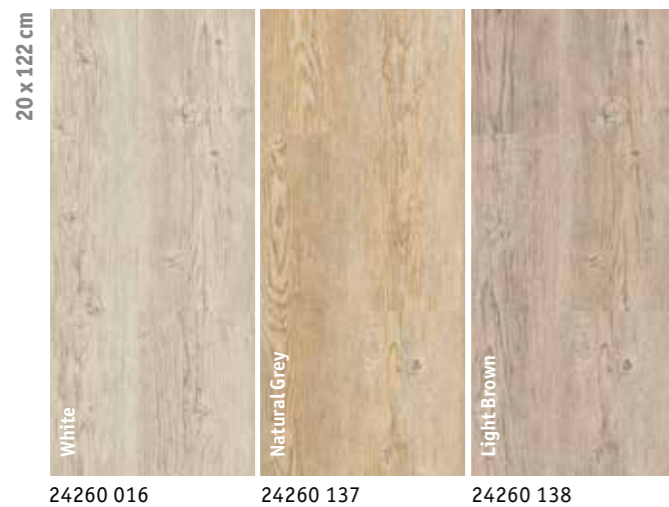

Large Beech



Patina Ash



Soft Walnut



English Oak



Maple



Rustic Oak




iD INSPIRATION 40

White Oak



Polished Concrete

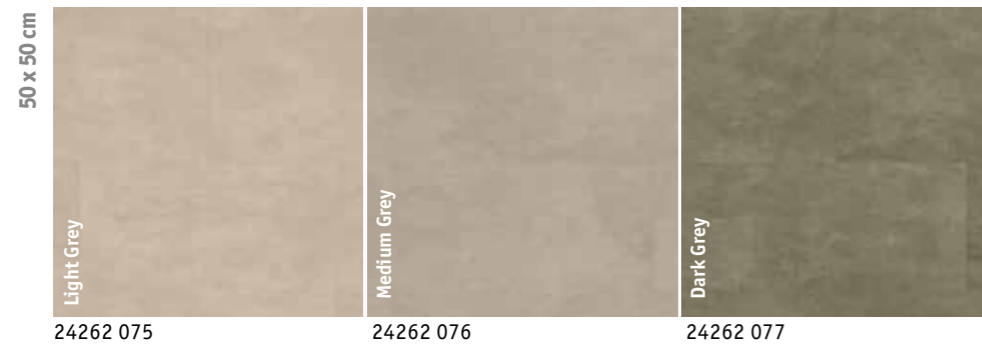

Rock



Vintage Zinc




Soft Walnut / Red Brown
Modern Oak / Beige

iD INSPIRATION 40

FEATURE STRIP COLOURS


Create visual effects with contrasts of colours to highlight interior features, shape perceptions of a room size or personalise your flooring design.

BLACK	1421 001	RED	1421 010	TOBACCO	1421 008
DARK GREY	1421 009	COPPER	1421 012	SILVER	1421 002
ROYAL BLUE	1421 011	GOLD	1421 003	EGGSHELL	1421 013

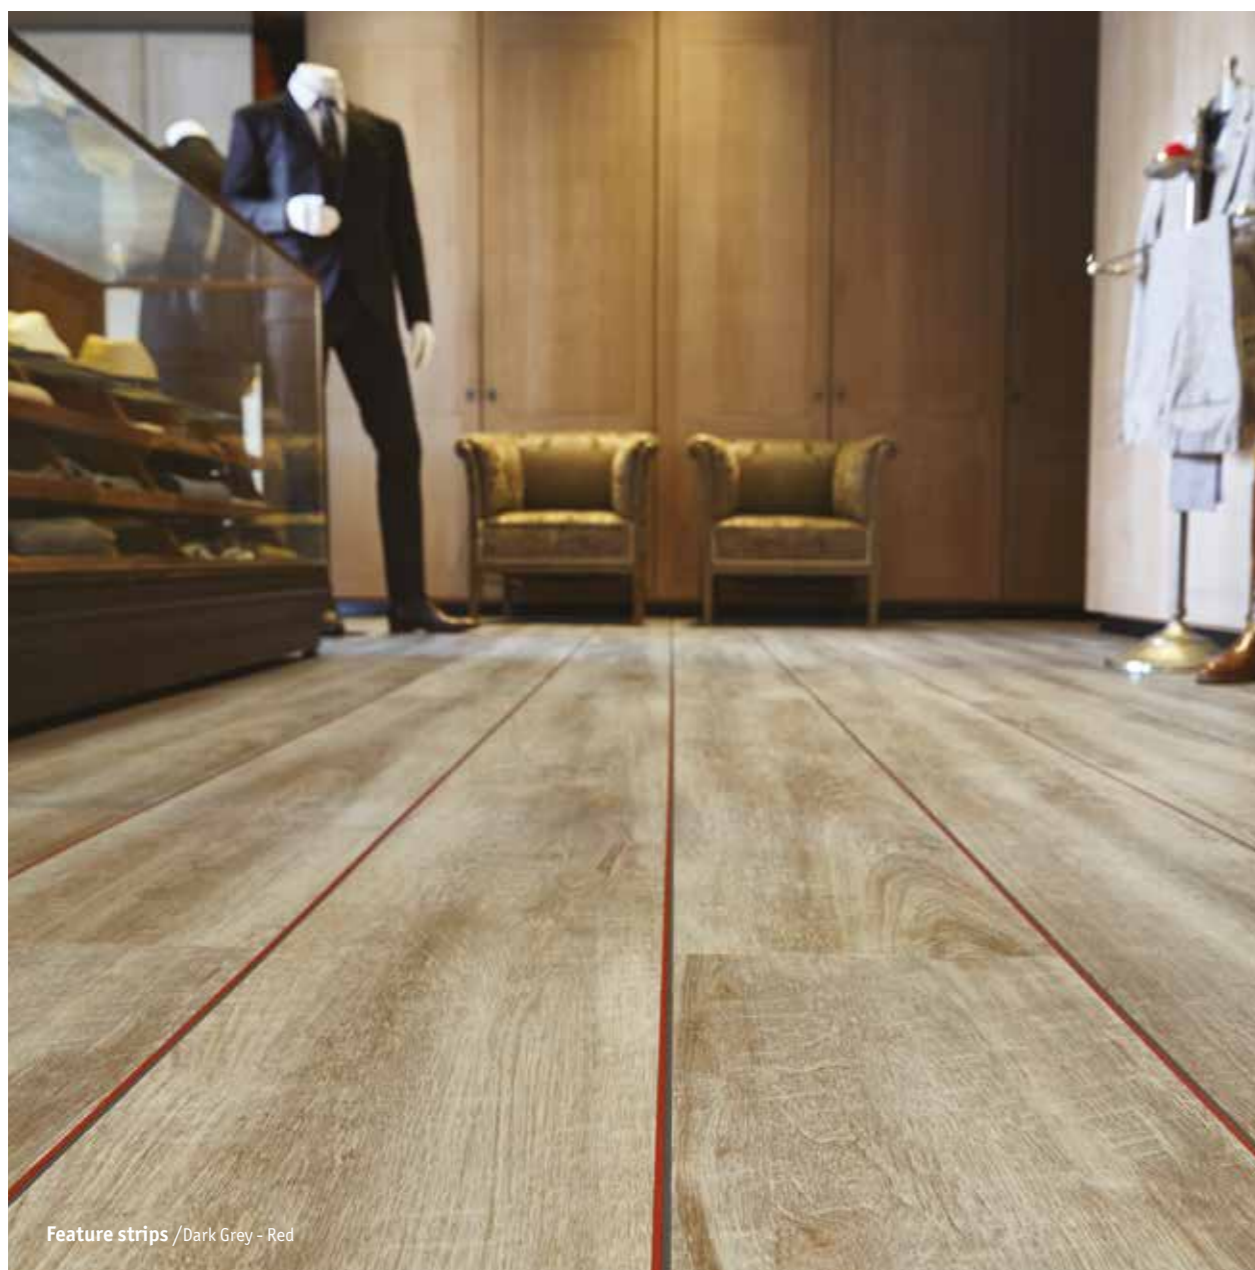

Feature strips / Dark Grey - Red


ACCESSORIES



PVC DECORATIVE SKIRTING

Compact skirting with decorative film and PUR surface treatment to perfectly match all designs

📦 2.02 lm skirting in packs x 10

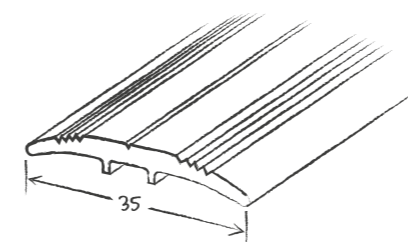


ALUMINIUM TRANSITION PROFILE - TMT

Transition profile, to be screwed

● Silver 1451 000

● Bronze 1451 001

📦 2.7 lm profiles in packs x 10

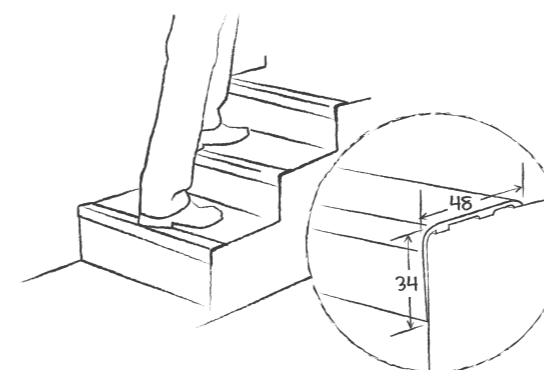


ALUMINIUM STAIRNOSE - MS1

Stairnose, to be screwed over the floorcovering

● Silver 1434 001

📦 2.6 lm profiles in packs x 10

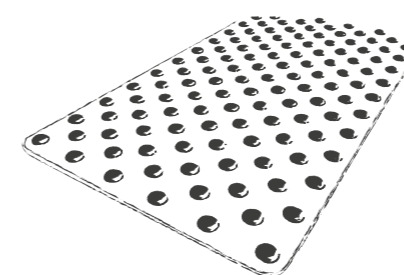

3D STUD

■ Accessibility accessory

■ Ready-to-use podotactile studs to be simply fitted on top of the existing floorcovering

○ White 1440 050

● Grey 1440 051

● Black 1440 052

● Ivory 1440 053

● Red 1440 054

● Yellow 1440 055

📦 5mm x 25mm stud in packs x 200



iD ESSENTIAL 30

With 43 colours, 2 formats and 9 finishes, iD Essential 30 is the best value for money. Mix and match wood, stones and metallic designs, play with colour shades. For commercial environment with light traffic.

Country Oak / Brown



iD ESSENTIAL 30

In the iD Essential 30 collection, 3 patterns and 12 different colours are available with embossing in register. This technique is used to create a precise texture that enhances a wood design. The surface is carved to match the natural essence of the wood, but unlike real wood, the surface interior does not absorb water and dirt and can be easily cleaned.

GREAT DESIGN OPTIONS

- 43 colour options and 9 different surface aspects.
- Plank and tile dimensions that you can combine to compose your own flooring expressions.

GREAT RESISTANCE AND EASY CLEANING

- Hygienic surface treated with the Tarkett unique TopClean XP coating that strengthens it, extends the life-cycle and simplifies cleaning and maintenance.


A PEOPLE-FRIENDLY SOLUTION

- Tarkett aims to provide tangible environmental and health benefits to flooring users, for domestic and light commercial use.

A SUSTAINABLE SOLUTION



Total VOC emissions are at least 10 times lower than Europe's strictest standards.



100% recyclable.



Uses a phthalate-free technology, based on alternative plasticizers that can be used for sensitive applications such as the production of toys, food packaging and medical devices.

Country Oak / Brown

iD ESSENTIAL 30

EMBOSSING IN REGISTER

Cerused Oak



Aspen Oak



Beech



Country Oak



Primary Pine



Washed Pine



Smoked Oak



iD ESSENTIAL 30

Soft Oak

22.9 x 121.9 cm
15.2 x 91.4 cm



White 3977 011
Light Beige 3977 015
Beige 3977 009
3976 009
Light Brown 3977 012
3976 012
Light Grey 3977 010
3976 010

Soft Oak

22.9 x 121.9 cm
15.2 x 91.4 cm



Natural 3977 008
3976 008
Brown 3977 007

Maple

15.2 x 91.4 cm



Natural 3976 031

Walnut


15.2 x 91.4 cm



Light Brown 3976 034

Original Slate

61 x 30.5 cm

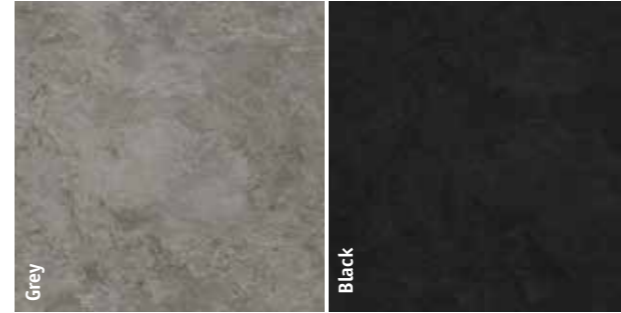

Grey 3979 007
Black 3979 006

Sandstone

61 x 30.5 cm



Brown 3979 005
Black 3979 004

Scratched Metal

61 x 30.5 cm



Grey 3979 008

Venezia


61 x 30.5 cm



Beige 3979 002
Grey 3979 001

ACCESSORIES


SKIRTING



PVC DECORATIVE SKIRTING

- Compact skirting with decorative film and PUR surface treatment to perfectly match all designs
- 📦 2.02 lm skirting in packs x 10


PROFILE

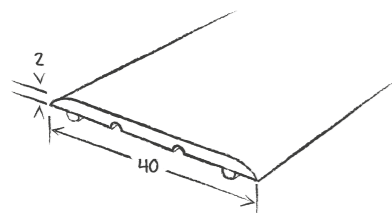

SELF-ADHESIVE TRANSITION PROFILE - MT40SA

Self-adhesive aluminium transition strip, for a perfect transition between different flooring materials

- Silver 1470 008
- 📦 10 units of 2.7 lm

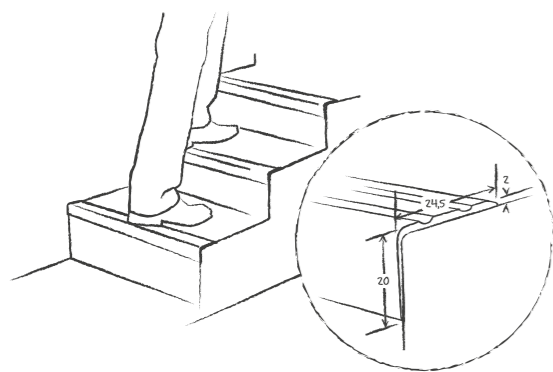


STAIRNOSE - MSN24SA

Aluminum stairnose, self-adhesive, to be screwed


- Silver 1480 008
- 📦 10 units of 2.7 lm

UNDERLAY

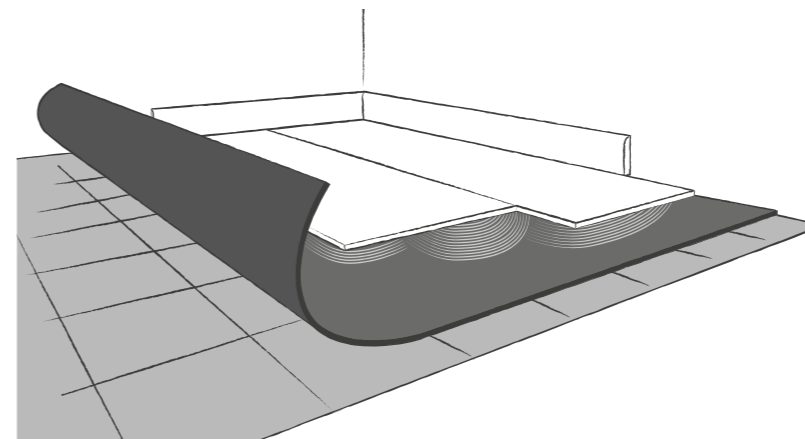

TARKOFLAT LOOSE-LAY

- Ready-to-use solution to reduce slight unevenness by up to 1.5mm depth
- Quick and easy-to-install solution
- Calendered PVC foil, loose-lay (naked)
- Grey 3568 004

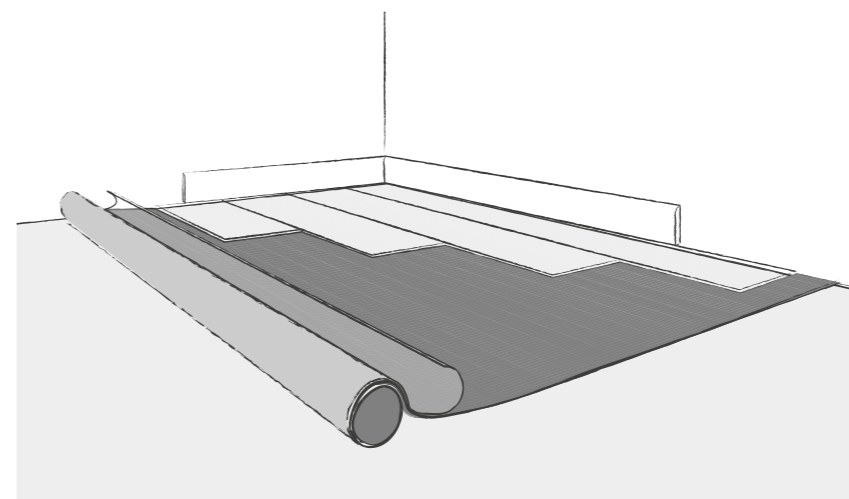

TARKOFLAT SELF-ADHESIVE

- Ready-to-use solution to reduce slight unevenness by up to 1.5 mm depth
- Quick and easy-to-install solution
- Environmentally-friendly solution (no adhesive needed)
- Grey 3569 004

*Tarkett recommend a selection of manufacturer adhesive (list available at: professionals.tarkett.com/content/list-recommended-adhesives). It is the responsibility of the adhesive manufacturer and flooring contractor to ensure the product being used is appropriate to use and applied in accordance with the manufacturer recommendations.



iD INSPIRATION CLICK

The iD Inspiration Click range features a refined palette of expressive wood textures. The motifs on all 20 designs were exclusively created to match the natural essence of wood.

Contemporary Oak / Grey - Natural - Brown



iD INSPIRATION CLICK

iD Inspiration Click is an ideal solution for semi-commercial areas. It requires little to no subfloor preparation and can be installed over existing flooring. Its unique click system makes for a floating installation, without the need of glue, making installation 35% quicker than with glue-down products and 15% quicker than with other click systems*.

The new iD Inspiration Click collection features 20 elegant colours that best express the latest trends.

THE IDEAL BLEND OF DURABILITY AND SUSTAINABILITY

- Hygienic surface treated with the Tarkett unique TopClean XP coating that strengthens it, extends the life-cycle and simplifies cleaning and maintenance.

A SUSTAINABLE SOLUTION



Helps improve indoor air quality with VOC emissions below quantifiable levels, under $10\mu\text{g}/\text{m}^3$ after 28 days (10 times below the official standards level).



100% recyclable.



Phthalate-free technology based on alternative plasticizers.



Made in Europe to benefit from our best-in-class industrial expertise.

*Estimation - not binding

Contemporary Oak / Grey - Natural - Brown


WOOD

AUTHENTIC STONES

Contemporary Oak



Terrazzo

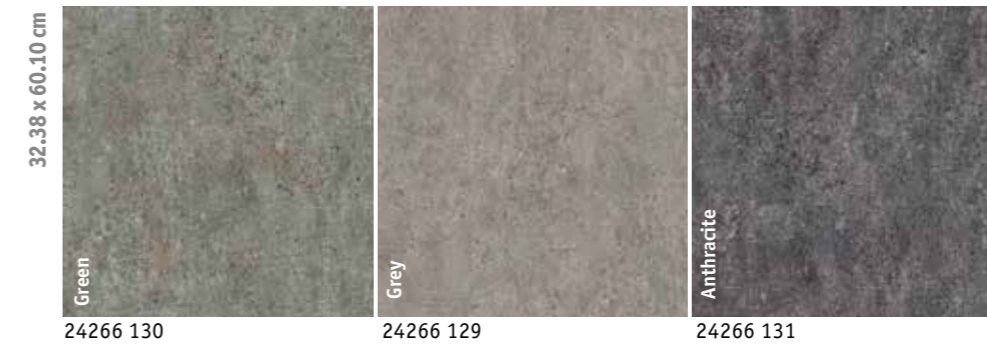

ELM




Patina Ash



MATERIAL EFFECTS

Oxide

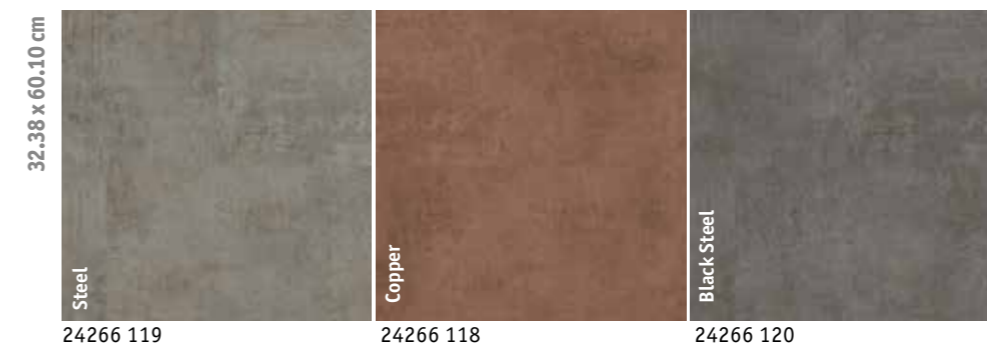

Patina Ash




Rustic Oak



ACCESSORIES


SKIRTING



PVC DECORATIVE SKIRTING


- Compact skirting with decorative film and PUR surface treatment to perfectly match all designs
- 📦 2.02 lm skirting in packs x 10

ACCESSIBILITY

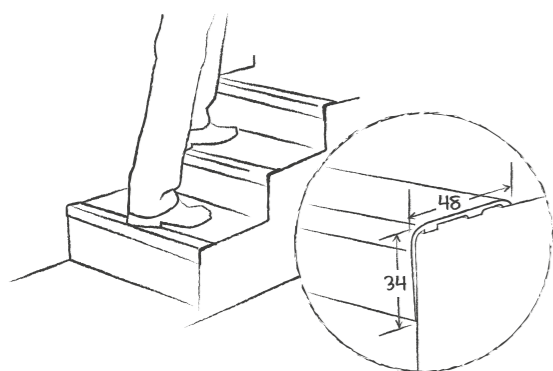

ALUMINIUM STAIRNOSE


- Aluminium stairnose, to be screwed over the floor
- Silver 1434 011
- 📦 10 units of 2.6 lm

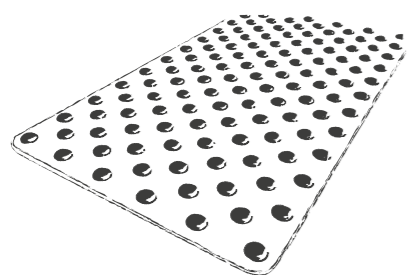

3D STUD


- Accessibility accessory
- Ready-to-use podotactile studs to be simply fitted on top of the existing floorcovering
- White 1440 050
- Grey 1440 051
- Black 1440 052
- Ivory 1440 053
- Red 1440 054
- Yellow 1440 055
- 📦 5mm x 25mm stud in packs x 200

UNDERLAY

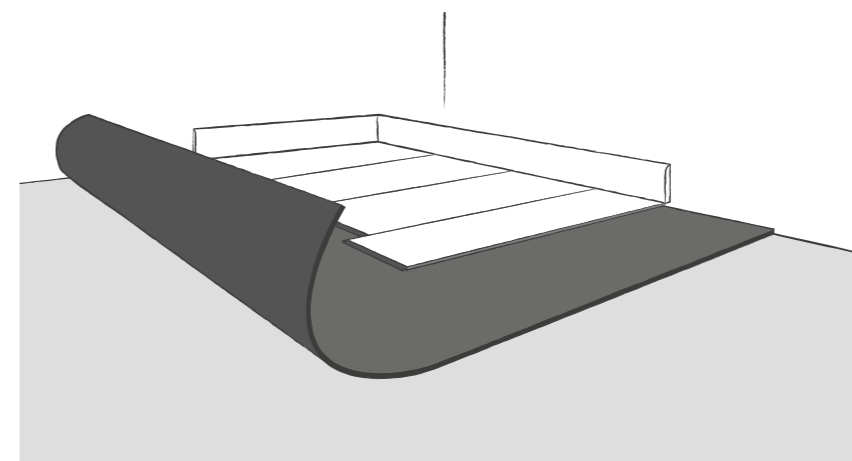

TARKOMFORT PREMIUM

- Provides high-impact sound reduction of up to 19dB and in-room noise reduction (72dB)
- Black 24992 030
- 📦 1 roll of 1m x 15m

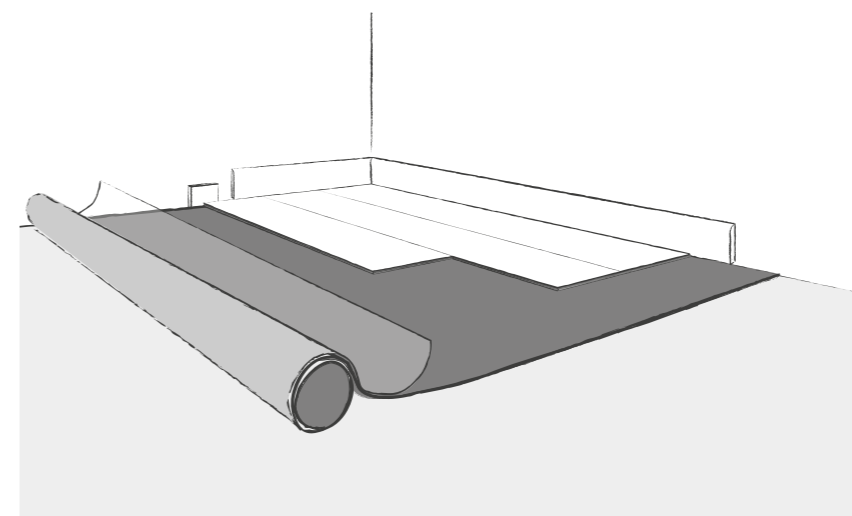


TARKOMFORT PRO

- Acoustic Performance**
- Powerful acoustic insulation, reducing both impact sound and in-room noise (13dB)
- Quick and easy to install
- Woven anti-slip surface to grip floor covering
- Brown 2499 2020

ACCESSORIES


PROFILE

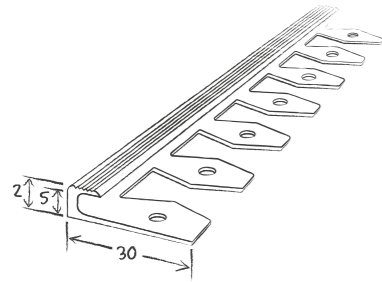

BENDABLE PROFILE

Aluminium stop profile, to be screwed


- Silver 1456 011
 - Stainless Steel 1456 012
- 📦 10 units of 2.5 lm

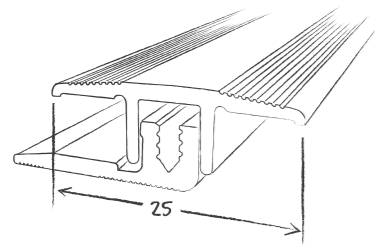

TRANSITION STRIP

Very high traffic aluminium transition strip, to be screwed


- Silver 1451 011
 - Stainless Steel 1451 012
- 📦 10 units of 2.7 lm

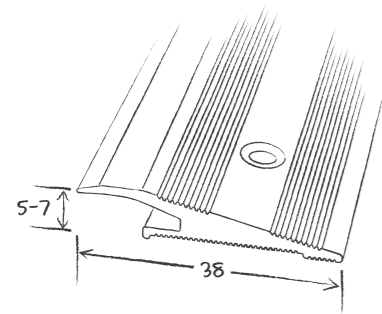

RAMP PROFILE

Very heavy traffic aluminium transition strip, to be screwed

- Silver 1454 011
 - Stainless Steel 1454 012
- 📦 10 units of 2.7 lm

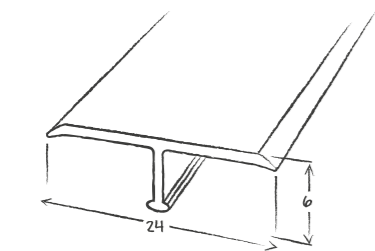

TRANSITION STRIP

General traffic aluminium transition strip, to be screwed

- Silver 1451 021
 - Stainless Steel 1451 022
- 📦 10 units of 2.7 lm



Rustic Oak / Stone Brown- Light Grey - Medium Grey - Dark Grey



iD ESSENTIAL CLICK

Express yourself through flooring design with 8 versatile and amazing colours from the iD Essential Click collection. You can also add a 19 dB impact sound reduction acoustic underlay for more at-home comfort.

Limewashed Oak / Beige
Delicate Oak / Natural

iD ESSENTIAL CLICK

iD Essential Click is the ideal solution for new build and renovation in domestic environments. It requires no or little subfloor preparation and can even be installed on some existing flooring. Its click system allows a floating installation, avoiding the use of glue, making the installation 20% quicker than with glue-down products*.

Future renovations are also easier and cheaper as the product can be removed with no damage to the subfloor. With Tarkomfort Premium underlay, your iD Essential Click flooring will benefit from a 19dB acoustic sound reduction.

ID ESSENTIAL CLICK FINISHING TOUCH

- Easy and rapid installation is matched by a permanent hold for a long-lasting solution.
- Comes with a complete range of accessories for user safety and efficient installation and project completion.


GREAT RESISTANCE AND EASY CLEANING

- Hygienic surface treated with the Tarkett unique TopClean XP coating that strengthens it, extends the life-cycle and simplifies cleaning and maintenance.

A SUSTAINABLE SOLUTION



Total VOC emissions are at least 10 times lower than Europe's strictest standards.



100% recyclable.




Phthalate-free technology based on alternative plasticizers.

*Estimation - not binding




Limewashed Oak / Beige
Delicate Oak / Natural

iD ESSENTIAL CLICK

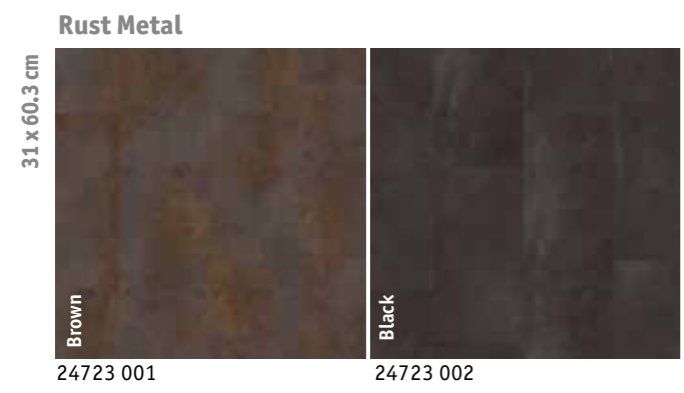

ACCESSORIES


SKIRTING



PVC DECORATIVE SKIRTING


- Compact skirting with decorative film and PUR surface treatment to perfectly match all designs
- 📦 2.02 lm skirting in packs x 10

PROFILE

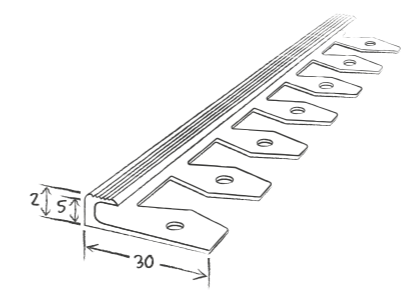


BENDABLE PROFILE

- Aluminium stop profile, to be screwed
- Silver 1456 011
- Stainless Steel 1456 012
- 📦 10 units of 2.5 lm

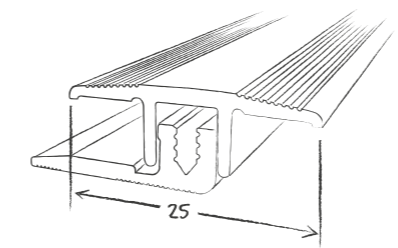

TRANSITION STRIP

- Very high traffic aluminium transition strip, to be screwed
- Silver 1451 011
- Stainless Steel 1451 012
- 📦 10 units of 2.7 lm



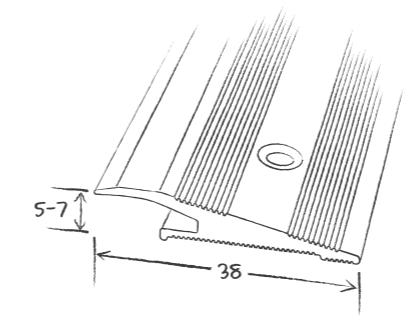


RAMP PROFILE

- Aluminium ramp profile, to be screwed
- Silver 1454 011
- Stainless Steel 1454 012
- 📦 10 units of 2.7 lm

ACCESSORIES

ACCESSIBILITY

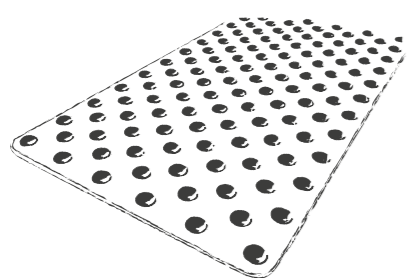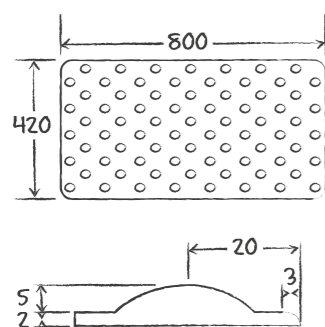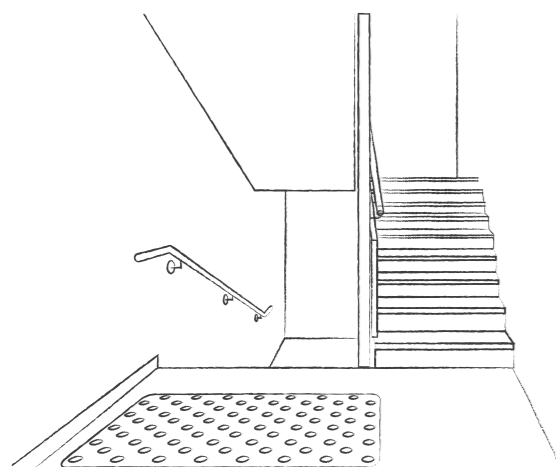

WARNING TILE

- Helps recognize a change in level, in accordance with regulatory requirements for disabled access and safety

- Self-adhesive or to be glued to the floorcovering (according to product), Format: 800 x 420 x 7mm

- 📦 1 box of 6 tiles

- White 1431 001

- Black 1431 002

- light Grey 1431 003

- Yellow 1431 006

- Self-adhesive rectangular tiles, Format: 815 x 420 x 8mm

- 📦 1 box of 6 tiles

- Self-adhesive square tiles, Format: 450 x 420 x 8mm

- 📦 1 box of 20 tiles

- White 1440 350 - 1440 450

- Grey 1440 351 - 1440 451

- Black 1440 352 - 1440 452

- Ivory 1440 353 - 1440 453

- Red 1440 354 - 1440 454

- Yellow 1440 355 - 1440 455

3D STUD

- Accessibility accessory

- Ready-to-use podotactile studs to be simply fitted on top of the existing floorcovering

- White 1440 050

- Grey 1440 051

- Black 1440 052


- Ivory 1440 053

- Red 1440 054

- Yellow 1440 055

- 📦 5mm x 25mm stud in packs x 200

UNDERLAY

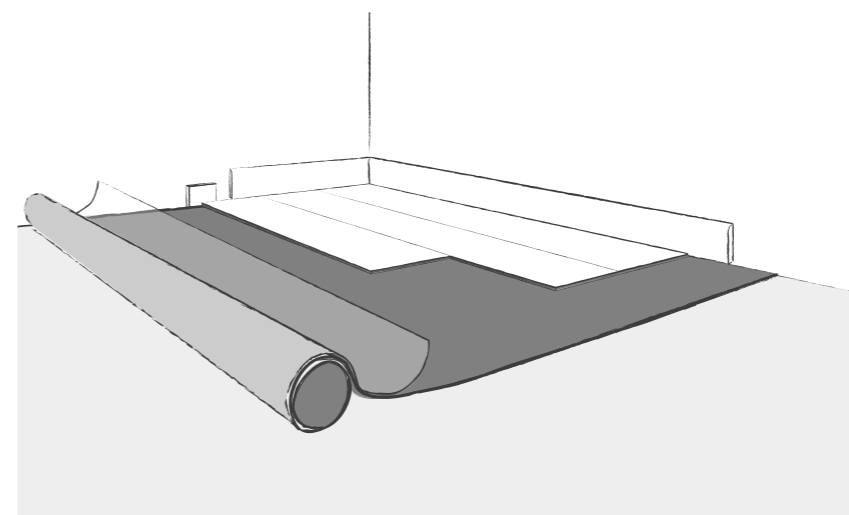

TARKOMFORT PRO


Acoustic Performance

- Powerful acoustic insulation, reducing both impact sound and in-room noise (13dB)

- Quick and easy to install

- Woven anti-slip surface to grip floor covering

- Brown 2499 2020

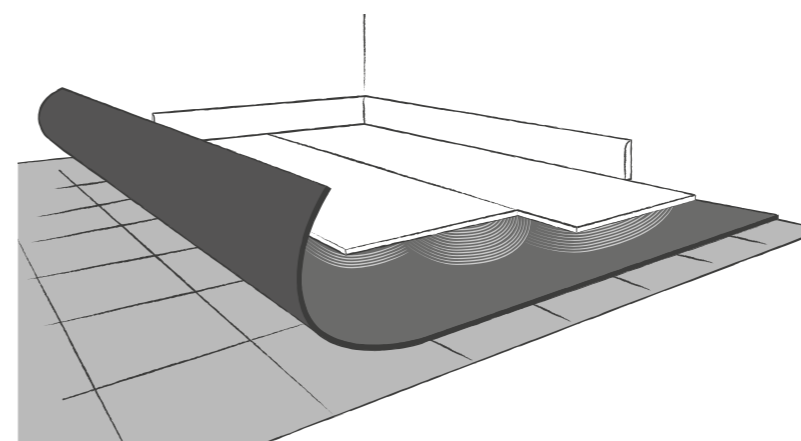

TARKOFLAT LOOSE-LAY

- Ready-to-use solution to reduce slight unevenness by up to 1.5mm depth

- Quick and easy-to-install solution

- Calendered PVC foil, loose-lay (naked)

- Grey 3568 004

*Tarkett recommend a selection of manufacturer adhesive (list available at: professionals.tarkett.com/content/list-recommended-adhesives). It is the responsibility of the adhesive manufacturer and flooring contractor to ensure the product being used is appropriate to use and applied in accordance with the manufacturer recommendations.



iD INSPIRATION LOOSE-LAY

Take a look at iD Inspiration Loose-lay collection with its unique herringbone anti-skid technology that provides stronger plank adherence and stability than other modular vinyl solutions. It also lets you mix and match from a wealth of great designs.

Limed Oak / Beige - Grey - Brown



Limed Oak / Beige - Grey - Brown

iD INSPIRATION LOOSE-LAY

iD Inspiration Loose-lay is up to three times faster to install than other modular vinyl solutions (1), making it ideal for small or occupied surfaces, or environments requiring fast installation. It even makes overnight renovation possible. It requires no or little subfloor preparation, as it absorbs uneven patches, and no glue (2) for installation. iD Inspiration Loose-lay's anti-skid backing is unique. Its patented herringbone design and pattern ensures strong plank adherence and stability.

A UNIQUE LAYING TECHNOLOGY FOR FAST AND COST-SAVING INSTALLATIONS

- 2.5 times higher adherence than its competitors (3).
- Totally dimensionally stable, and as durable and reliable as a glue-down flooring.
- Easily removable with no damage to the product or the subfloor.

A WIDE SELECTION OF EXCLUSIVE AND ULTRA-REALISTIC DESIGNS

- 22 refined designs in plank (19 wood essences) and tile (3 stone patterns) formats.
- Coordinated with Tarkett accessories: skirtings, transitions and profiles.


GREAT RESISTANCE AND LOW MAINTENANCE

- Hygienic surface treated with the Tarkett unique TopClean XP coating that strengthens it, extends the life-cycle and simplifies cleaning and maintenance.

A SUSTAINABLE SOLUTION



Contributes to improved indoor air quality with total VOC emissions at least 10 times lower than Europe's strictest standards.



100% recyclable.



Phthalate-free technology based on alternative plasticizers.



Made in Europe to benefit from our best-in-class industrial expertise.

(1) and (3) Estimation based on Tarkett's internal tests

(2) No acrylic adhesive needed, only a tackifier for very large areas. Please refer to installation instructions.

id INSPIRATION LOOSE-LAY

Beach Wood



Mountain Oak



Christmas Pine



Delicate Wood



Sawn Oak




Elegant Oak



Limed Oak




Béton

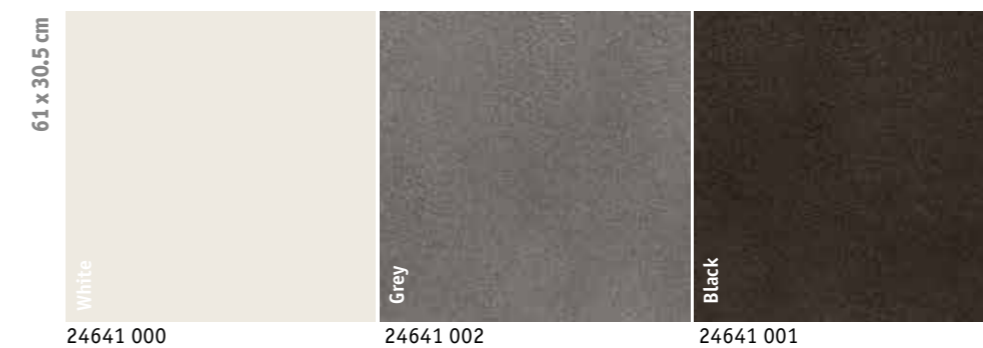

ACCESSORIES

SKIRTING




PVC DECORATIVE SKIRTING

Compact skirting with decorative film and PUR surface treatment to perfectly match all designs

📦 2.02 lm skirting in packs x 10

PROFILE

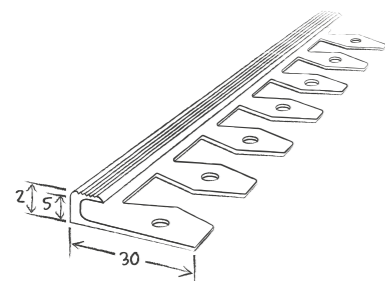


BENDABLE PROFILE

Aluminium stop profile, to be screwed

● Silver 1456 011

● Stainless Steel 1456 012

📦 10 units of 2.5 lm

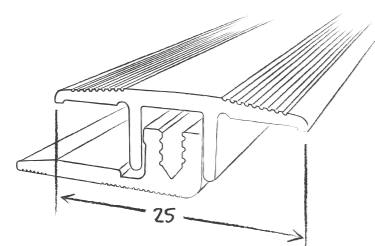


TRANSITION STRIP

Very high traffic aluminium transition strip, to be screwed

● Silver 1451 011

● Stainless Steel 1451 012

📦 10 units of 2.7 lm

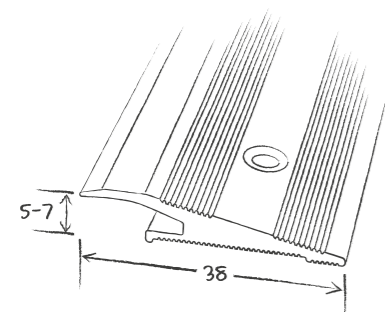

RAMP PROFILE

Very heavy traffic aluminium profile, to be screwed


● Silver 1454 011

● Stainless Steel 1454 012

📦 10 units of 2.7 lm



Beach Wood / Beige - Grey

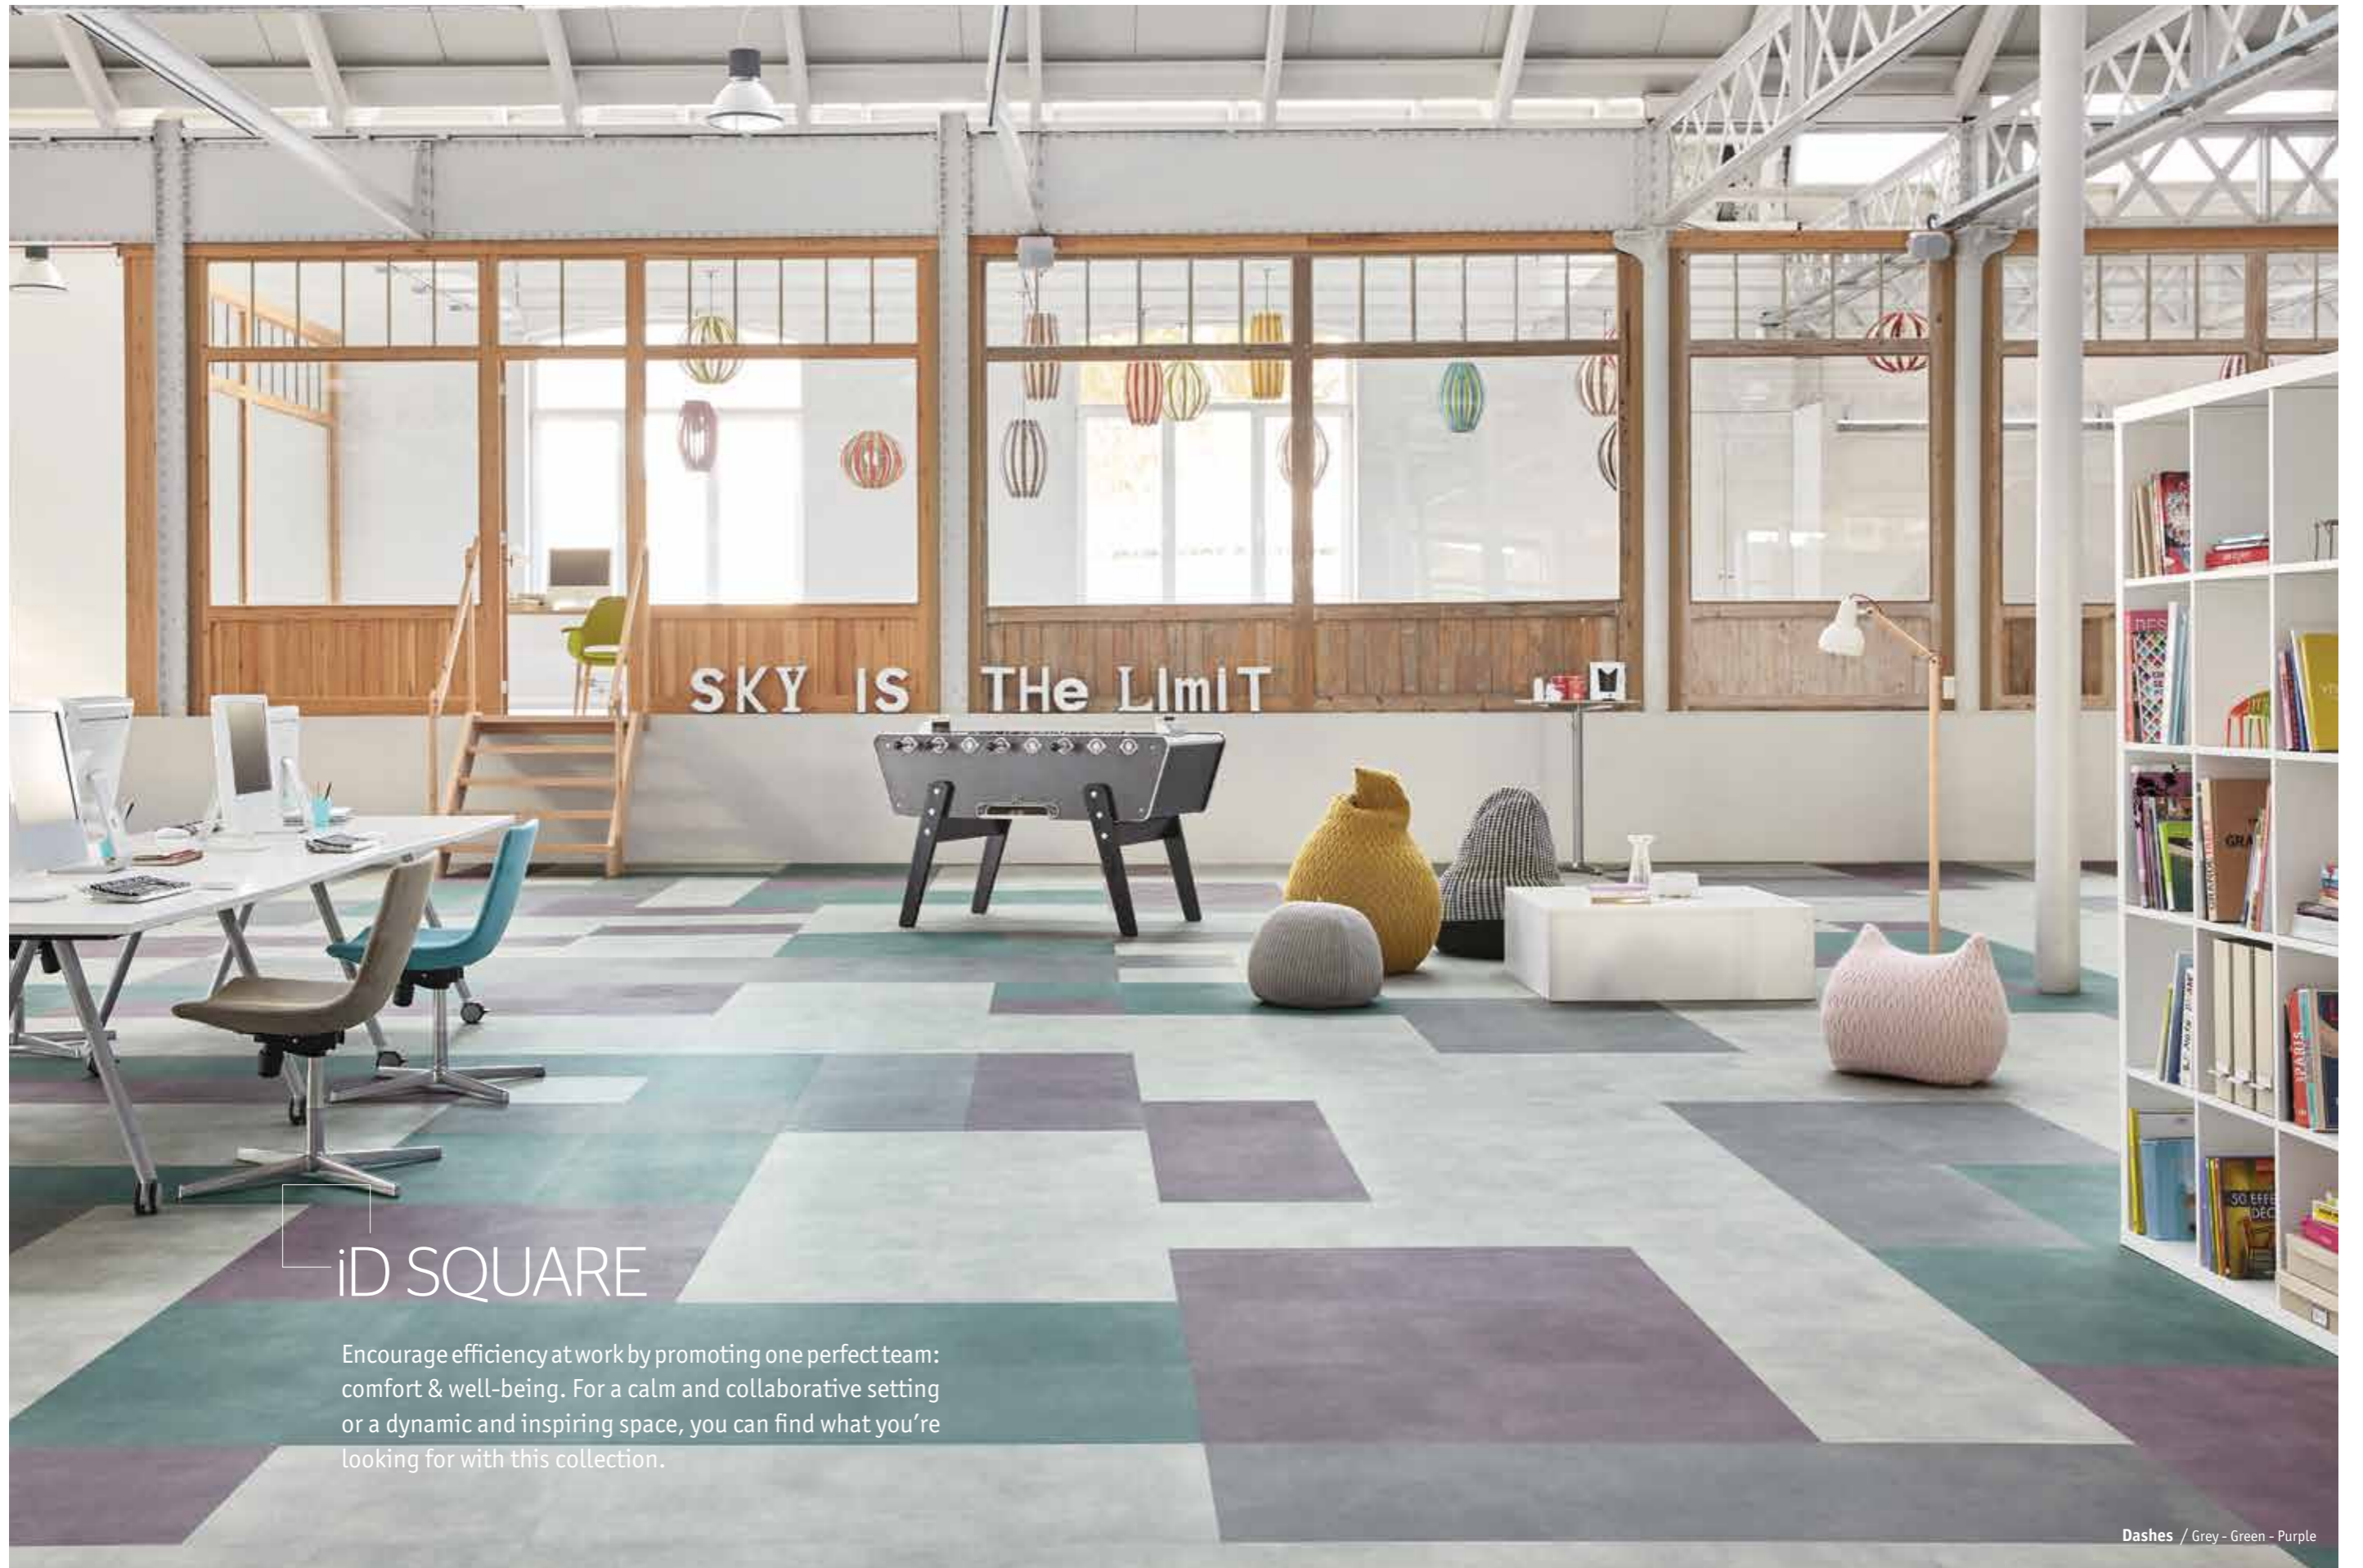

iD SQUARE

Encourage efficiency at work by promoting one perfect team: comfort & well-being. For a calm and collaborative setting or a dynamic and inspiring space, you can find what you're looking for with this collection.

Dashes / Grey - Green - Purple

iD SQUARE

iD Square has the largest variety of designs & colours on the market to create serene or more stimulating ambiances to reflect the image and values of your company. Its colours combine and coordinate to enhance zoning. This unique offer has 3 different formats: 50 x 50 cm for classic & timeless designs, 66 x 66 cm with modern designs and fewer joints for optimal aesthetic, 25 x 100 cm and 50 x 50 cm to play on multi-combinations.

EMPLOYEES COMFORT & WORK EFFECTIVENESS

- Better in-room acoustic with less sound transmission - ideal for working areas where concentration is needed.

EASY AND QUICK TO INSTALL & REMOVE

- Tackified offer: the flooring is easier to install and remove to ensure a tile replacement or to reach the subfloor.
- Smaller, more manageable pack quantities to minimise wastage on site.
- 66 x 66 cm format that allows a 10% faster installation.


GREAT RESISTANCE AND EASY CLEANING

- Specifically developed for the demanding heavy-traffic work environment.
- Resistant to spread of water & coffee stains and easy to keep clean.
- Hygienic surface treated with the Tarkett unique TopClean XP coating that strengthens it, extends the life-cycle and simplifies cleaning and maintenance.

A SUSTAINABLE SOLUTION



Unmatched indoor air quality with $\leq 10\mu\text{g}/\text{m}^3$ emission.



100% recyclable.



Phthalate-free technology is a guaranteed standard to ensure your employees' health.




Made in Germany to benefit from our best-in-class industrial expertise.




Dashes / Grey - Green - Purple

Grid

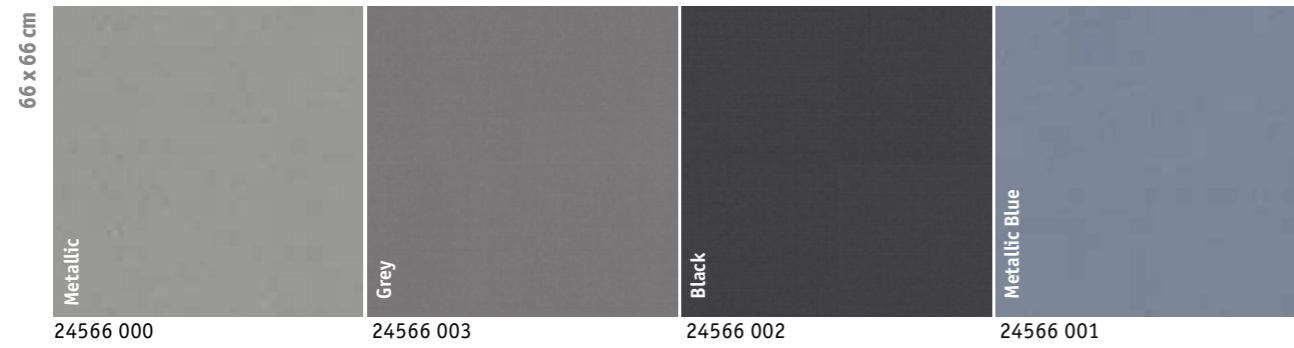

Dashes

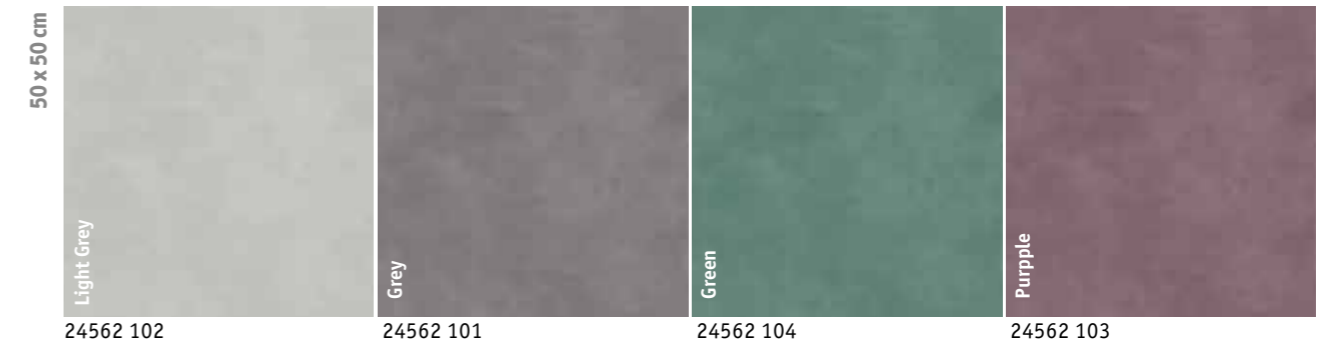

Vintage Zinc



Dashes




Patchwood



Vintage Zinc




Fabrics

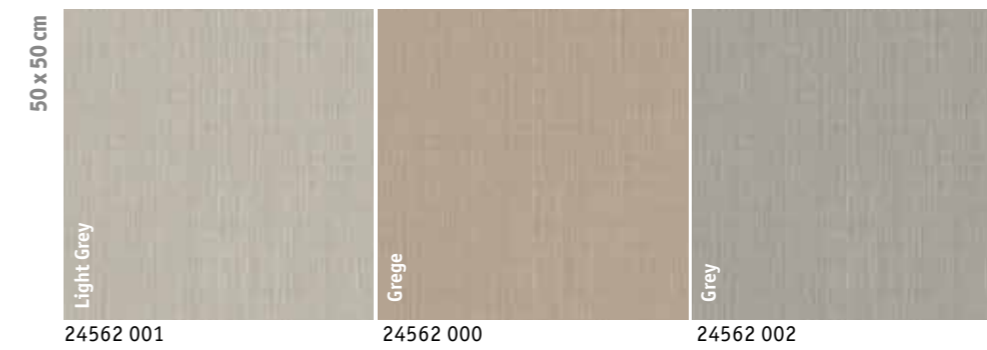


Patchwork




Tisse

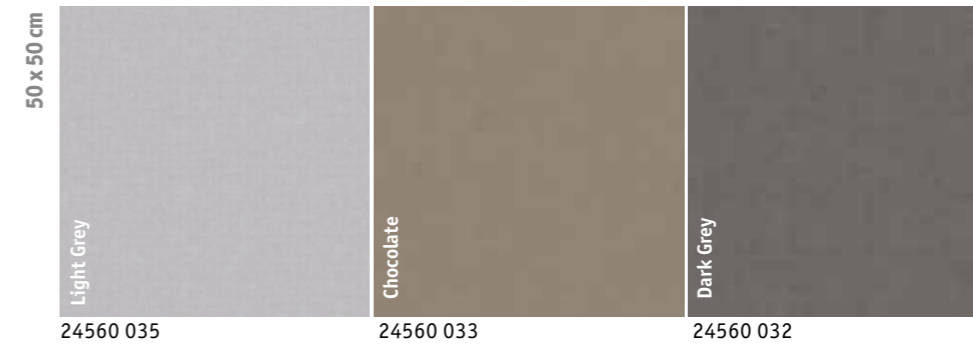


Patine

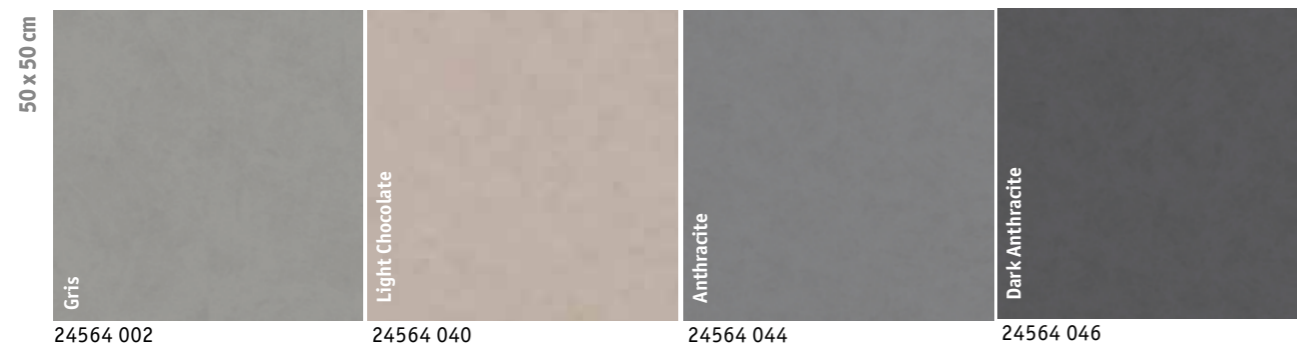


Zen

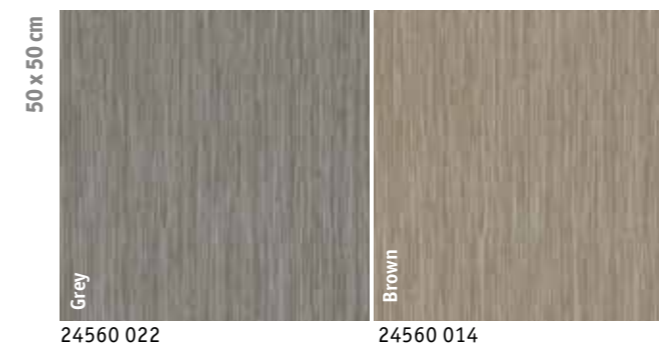

Patine

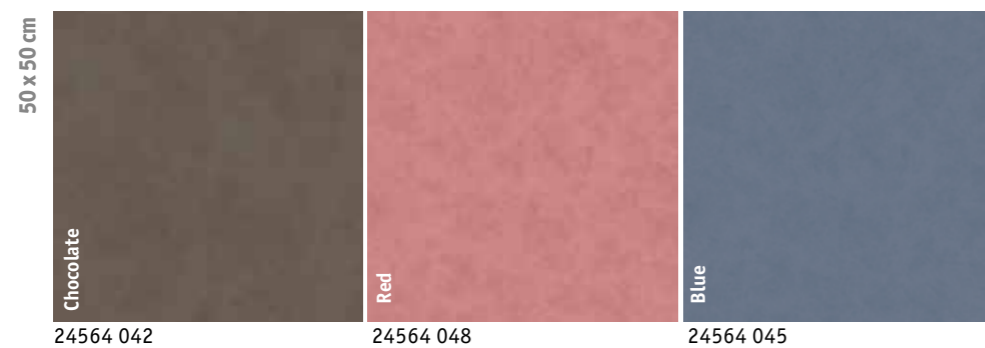

Minimal Wood

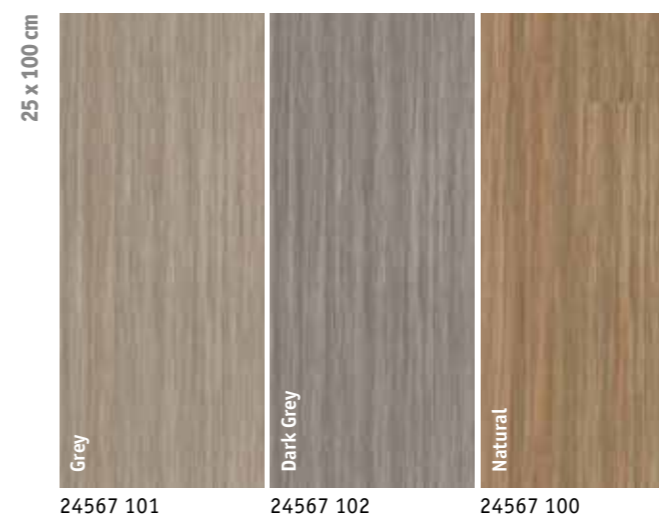


Plateau Ash



ACCESSORIES

SKIRTING




WALL BASE DECORATIVE SET-ON SKIRTING

■ Compact skirting with decorative film and PUR surface treatment, to be glued

- White 26640 700
- Aluminium 26640 701
- 📦 2.02 lm skirting in packs x 10


PROFILE

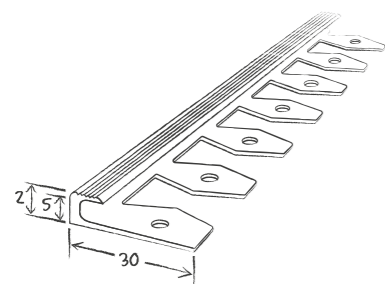

BENDABLE PROFILE

Aluminium stop profile, to be screwed


- Silver 1456 011
- Stainless Steel 1456 012
- 📦 10 units of 2.5 lm

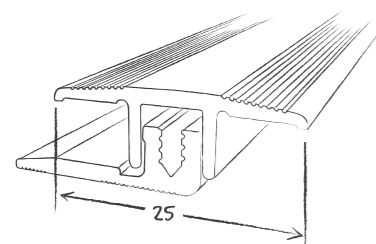

TRANSITION STRIP

Very high traffic aluminium transition strip, to be screwed

- Silver 1451 011
- Stainless Steel 1451 012
- 📦 10 units of 2.7 lm

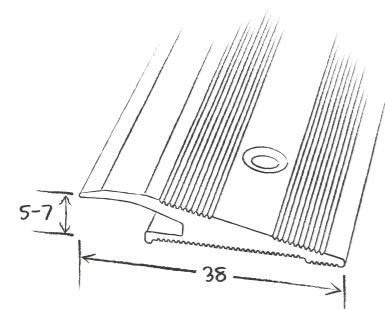


RAMP PROFILE

Very heavy traffic aluminium profile, to be screwed

- Silver 1454 011
- Stainless Steel 1454 012
- 📦 10 units of 2.7 lm

ACCESSIBILITY

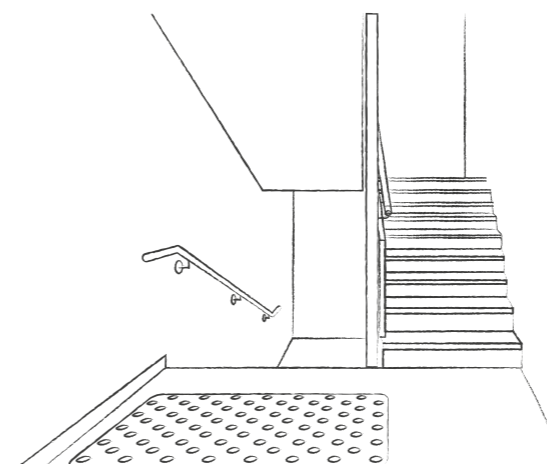

WARNING TILE

■ Helps recognize a change in level, in accordance with regulatory requirements for disabled access and safety

■ Self-adhesive or to be glued to the floorcovering (according to product), Format: 800 x 420 x 7mm

📦 1 box of 6 tiles

- White 1431 001
- Black 1431 002
- light Grey 1431 003
- Yellow 1431 006



■ Self-adhesive rectangular tiles, Format: 815 x 420 x 8mm

📦 1 box of 6 tiles

■ Self-adhesive square tiles, Format: 450 x 420 x 8mm

📦 1 box of 20 tiles

- White 1440 350 - 1440 450
- Grey 1440 351 - 1440 451
- Black 1440 352 - 1440 452
- Ivory 1440 353 - 1440 453
- Red 1440 354 - 1440 454
- Yellow 1440 355 - 1440 455

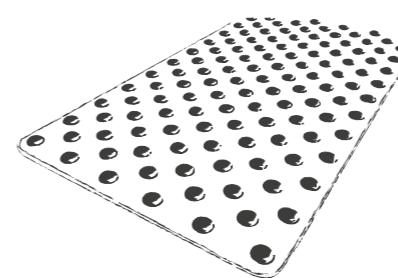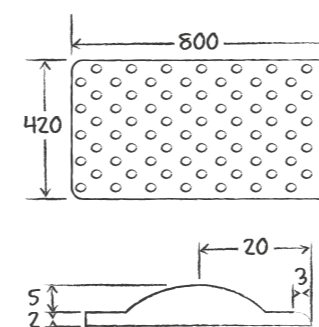


3D STUD

■ Accessibility accessory

■ Ready-to-use podotactile studs to be simply fitted on top of the existing floorcovering

- White 1440 050
- Grey 1440 051
- Black 1440 052
- Ivory 1440 053
- Red 1440 054
- Yellow 1440 055
- 📦 5mm x 25mm stud in packs x 200

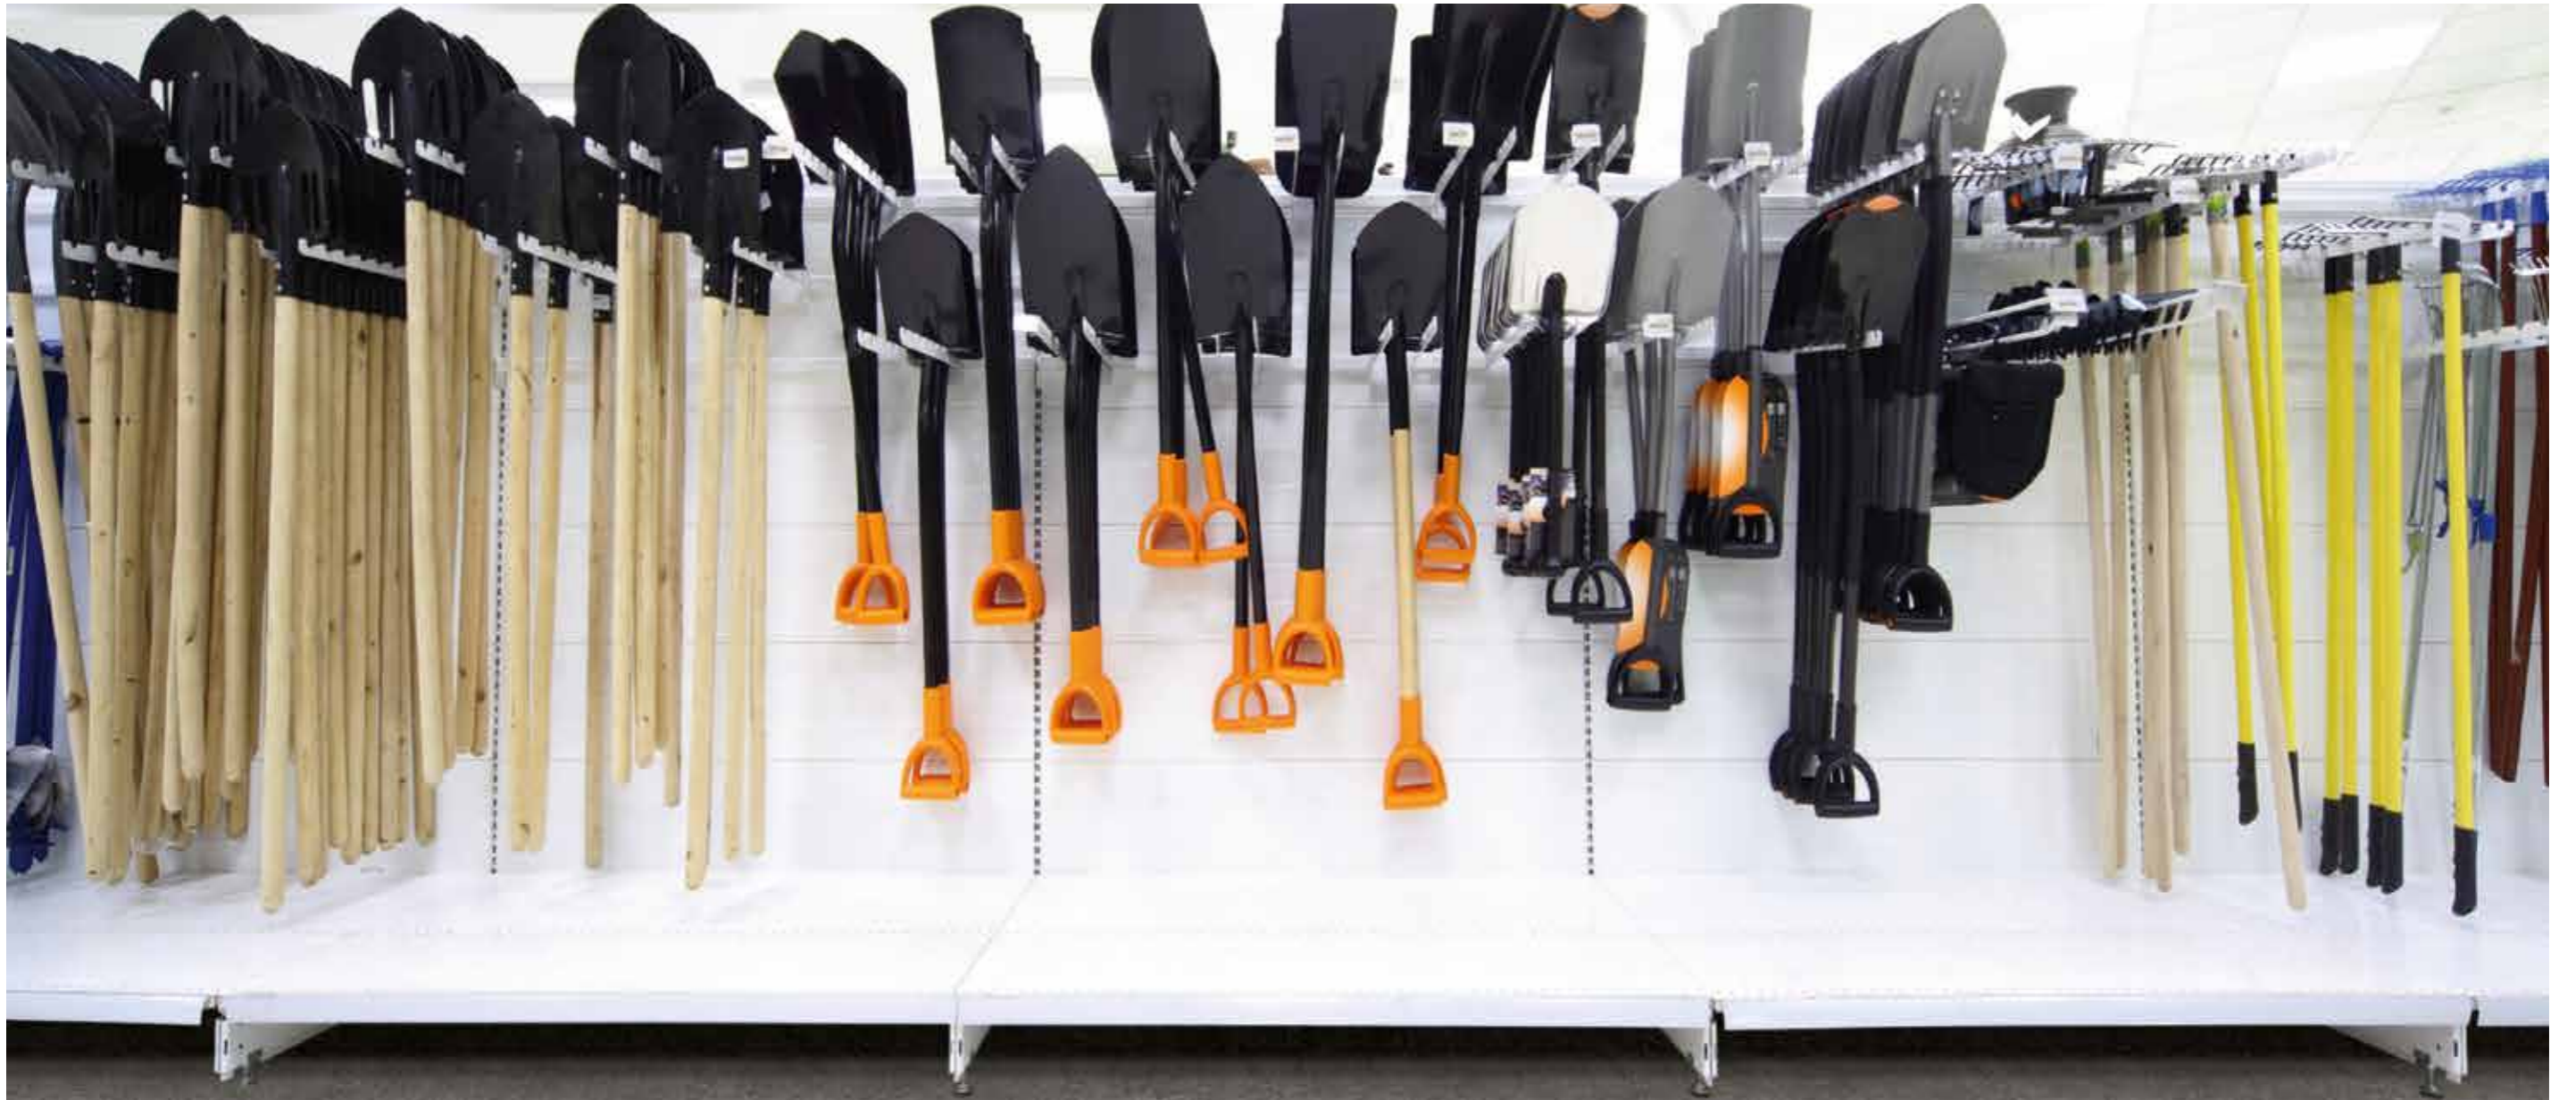

iD TILT

Get tough with iD Tilt, the floor designed to meet your high traffic commercial and industrial needs. Even in heavy-traffic areas, flooring designs and layouts can enhance pathways or zoning and still be playful.

Concrete / Dark Grey



iD TILT

iD TILT is Tarkett's floating floorcovering solution designed for commercial or industrial applications in both new builds and renovation projects. Easy to install, it keeps installation time to a minimum and iD TILT also reduces business losses due to construction downtime. Good value for your money, iD TILT saves you time and is an invaluable cost-saver on any construction project.

EASY TO INSTALL

- Limited subfloor preparation = time saved: 20% quicker than glue-down products.
- No glue required = cost & time savings: 10% lower installation costs.
- Your floor immediately available for use = no loss of business: overnight installation.

EASY TO MAINTAIN

- Easy to remove & to renovate.
- No damage to subfloor.
- Easy to clean: TopClean XP™ surface treatment.

HELPS DEFINE SPACES

- Create shop in shop corners and demo areas.
- Directional signage.
- Divide areas.

A SOLID CONSTRUCTION

- Suitable for high traffic areas.
- Very resistant interlocking system.
- Clean appearance.
- Long-lasting performance.

A SUSTAINABLE SOLUTION



Total VOC emissions are at least 10 times lower than Europe's strictest standards.




100% recyclable.




Phthalate-free technology based on alternative plasticizers.

Concrete

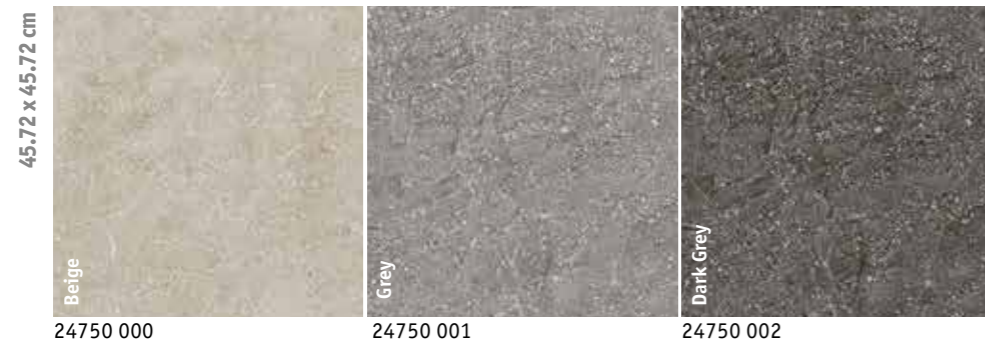


Granite

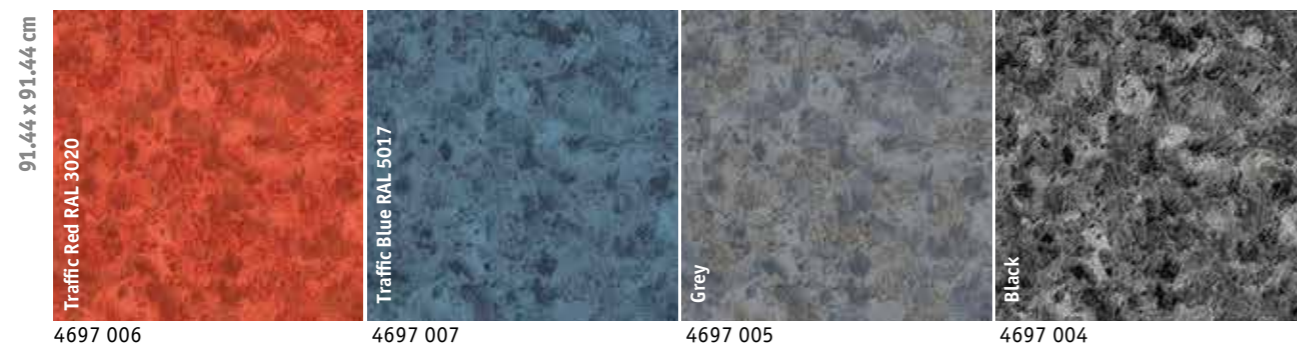

ACCESSORIES

SKIRTING




WALL BASE DECORATIVE SET-ON SKIRTING

■ Compact skirting with decorative film and PUR surface treatment, to be glued

- White 26640 700
- Aluminium 26640 701
- 📦 2.02 lm skirting in packs x 10


PROFILE

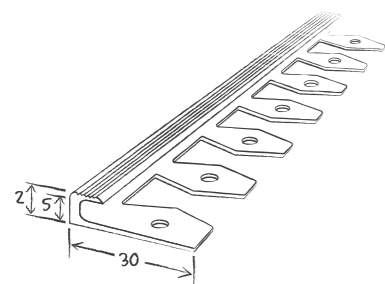

BENDABLE PROFILE

Aluminium stop profile, to be screwed


- Silver 1456 011
- Stainless Steel 1456 012
- 📦 10 units of 2.5 lm

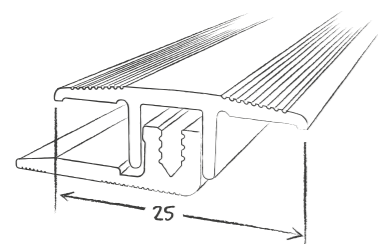

TRANSITION STRIP

Very high traffic aluminium transition strip, to be screwed

- Silver 1451 011
- Stainless Steel 1451 012
- 📦 10 units of 2.7 lm

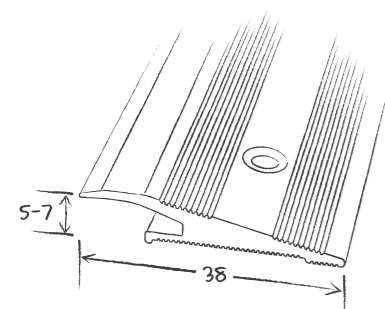


RAMP PROFILE

Very heavy traffic aluminium profile, to be screwed

- Silver 1454 011
- Stainless Steel 1454 012
- 📦 10 units of 2.7 lm

ACCESSIBILITY

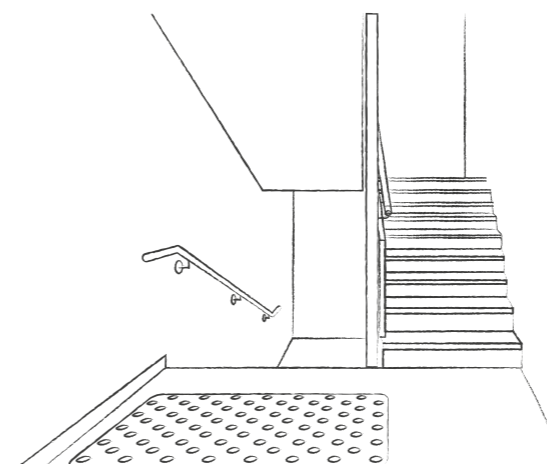

WARNING TILE

■ Helps recognize a change in level, in accordance with regulatory requirements for disabled access and safety

■ Self-adhesive or to be glued to the floorcovering (according to product), Format: 800 x 420 x 7mm

📦 1 box of 6 tiles

- White 1431 001
- Black 1431 002
- light Grey 1431 003
- Yellow 1431 006



■ Self-adhesive rectangular tiles, Format: 815 x 420 x 8mm

📦 1 box of 6 tiles

■ Self-adhesive square tiles, Format: 450 x 420 x 8mm

📦 1 box of 20 tiles

- White 1440 350 - 1440 450
- Grey 1440 351 - 1440 451
- Black 1440 352 - 1440 452
- Ivory 1440 353 - 1440 453
- Red 1440 354 - 1440 454
- Yellow 1440 355 - 1440 455

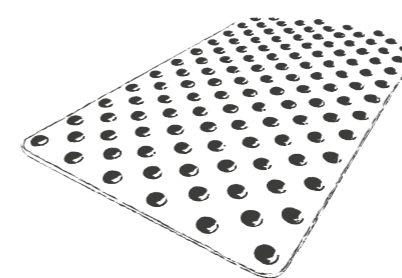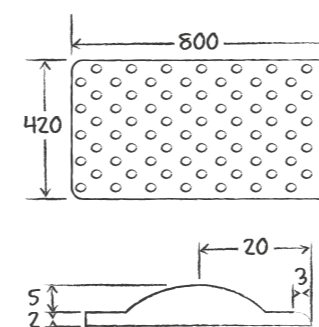

3D STUD

■ Accessibility accessory

■ Ready-to-use podotactile studs to be simply fitted on top of the existing floorcovering

- White 1440 050
- Grey 1440 051
- Black 1440 052
- Ivory 1440 053
- Red 1440 054
- Yellow 1440 055
- 📦 5mm x 25mm stud in packs x 200

TECHNICAL DATA iD INSPIRATION 55-70

Certification & classification	Standards	iD Inspiration 55	iD Inspiration 70
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering	Heterogeneous Compact Resilient Floorcovering
Classification	EN ISO 10874	Domestic: 23 Commercial: 33 Industrial: 42	Domestic: 23 Commercial: 34 Industrial: 43
Technical characteristics			
Total thickness	EN ISO 24346	2,5 mm	2,5 mm
Wear layer thickness	EN ISO 24340	0,55 mm	0,7 mm
Total weight	EN ISO 23997	4000 g/m ²	4000 g/m ²
Wear layer binder content	EN ISO 10582	Type I	Type I
Dimensions	EN ISO 24342	Planks 16,66 x 100 cm, 22 planks/box = 3,67 m ² 12,5 x 122 cm, 24 planks/box = 3,66 m ² 20 x 122 cm, 15 planks/box = 3,66 m ² 25 x 122 cm, 12 planks/box = 3,66 m ² 25 x 150 cm, 10 planks/box = 3,75 m ² Tiles 25 x 50 cm, 30 tiles/box = 3,75 m ² 50 x 50 cm, 15 tiles/box = 3,75 m ² 50 x 100 cm, 7 tiles/box = 3,50 m ² 100 x 100 cm, 3 tiles/box = 3 m ²	
Surface treatment (PUR)		TopCleanXP™	TopCleanXP™
Beveled edges		Yes	Yes
Technical performances			
Dimensional stability	EN ISO 23999	≤ 0,10 %	≤ 0,10 %
Curl resultant to heat	EN ISO 23999	≤ 2 mm	≤ 2 mm
Reaction to fire	EN 13501-1	B _n -s1 glued on wood panel and concrete	B _n -s1 glued on wood panel and concrete
Residual indentation	EN ISO 24343-1	≤ 0,05 mm	≤ 0,05 mm
Furniture leg	EN 424	No damage	No damage
Castor chair	ISO 4918 - EN 425	No damage	No damage
Impact sound reduction	EN ISO 717-2	ΔL _w = 2 dB	ΔL _w = 2 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,e,w} < 85 dB)	Class C (L _{n,e,w} < 85 dB)
Thermal resistance	EN ISO 10456	0,02 m ² K/W	0,02 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	Not affected (0)	Not affected (0)
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing μ ≥ 0,30	R9 / R10 depending on embossing μ ≥ 0,30
Electrical properties	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm	<2 kV on concrete > 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm	≥ 50N / 50mm
Underfloor heating		Suitable - max. 27 °C	Suitable - max. 27 °C

The above information is subject to modification for the benefit of further improvement. (01/17).

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

CUSTOMS TARIFF : 4820 5000 00

iD Inspiration 55-70



PRODUCTS & ACCESSORIES DETAILS

DESIGN	COLOUR	LRV	SKIRTING	DESIGN	COLOUR	LRV	SKIRTING
Antik Oak	Beige	30,05%	26640601	Bardiglio	Lime Stone	33,13%	26640355
Antik Oak	Brown	17,42%	26640602	Bardiglio	Grey	38,86%	26640356
Antik Oak	Dark Grey	23,89%	26640603	Bardiglio	Dark Grey	29,76%	26640357
Antik Oak	Grey	33,95%	26640264	Bardiglio	Anthracite	16,04%	26640358
Antik Oak	Natural	22,72%	26640605	Caviar	Misty Grey	25,81%	26640326
Antik Oak	Light Grey	26,02%	26640261	Caviar	Tobacco	19,62%	26640327
Antik Oak	Anthracite	15,04%	26640262	Caviar	Grey	49,89%	26640328
Antik Oak	Middle Grey	25,50%	26640263	Caviar	Brown	13,64%	26640329
Brushed Pine	Brown	19,90%	26640613	Caviar	Mauve	30,02%	26640330
Brushed Pine	Grey	27,95%	26640614	Caviar	Beige	37,77%	26640331
Brushed Pine	Natural	24,60%	26640265	Caviar	Foggy Blue	35,24%	26640332
Brushed Pine	White	42,66%	26640266	Composite	Warm Grey	37,82%	26640316
Contemporary Oak	Grey	28,20%	26640346	Composite	Cool Grey	30,45%	26640317
Contemporary Oak	Grege	30,32%	26640347	Composite	Black	8,87%	26640318
Contemporary Oak	Natural	26,42%	26640348	Metal Frame	Rose	42,20%	26640322
Contemporary Oak	Brown	16,06%	26640349	Metal Frame	Platinum	37,04%	26640323
Elm	Light Grey	45,88%	26640350	Metal Frame	Aluminium	39,91%	26640324
Elm	Beige	45,40%	26640351	Metal Frame	Stainless	28,11%	26640325
Elm	Natural	38,47%	26640352	Oxide	Copper	10,85%	26640359
Elm	Grege	37,52%	26640353	Oxide	Steel	18,07%	26640360
Elm	Brown	21,92%	26640354	Oxide	Black Steel	10,67%	26640361
English Oak	Beige	23,69%	26640624	Polished Concrete	Light Grey	41,57%	26640319
English Oak	Brown	17,58%	26640625	Polished Concrete	Medium Grey	31%	26640320
English Oak	Light	25,10%	26640626	Polished Concrete	Dark Grey	17,32%	26640321
English Oak	Natural	24,52%	26640627	Rock	Beige	43,87%	26640269
English Oak	Light Beige	45,42%	26640267	Rock	Black	9,74%	26640270
English Oak	Grey Beige	33,74%	26640268	Rock	Brown	11,27%	26640271
Pallet Pine	White	49,16%	26640339	Rock	Grege	48,04%	26640272
Pallet Pine	Beige	38,20%	26640340	Rock	Grey	34,79%	26640273
Pallet Pine	Natural	40,21%	26640341	Rustic Slate	Black	5,59%	26640274
Pallet Pine	Brown	30,11%	26640342	Rustic Slate	Beige	29%	26640275
Patina Ash	Beige	43,21%	26640343	Rustic Slate	Grey	31,83%	26640276
Patina Ash	Brown	29,79%	26640344	Terrazzo	Grey	23,18%	26640378
Patina Ash	Grey	31,03%	26640345	Terrazzo	Green	24,02%	26640379
Rustic Oak	Stone Brown	7,5%	26640370	Terrazzo	Anthracite	9,42%	26640380
Rustic Oak	Dark Grey	14,18%	26640371	Tisse	Beige	19,25%	26640277
Rustic Oak	Medium Grey	21,68%	26640372	Tisse	Black	5,02%	26640278
Rustic Oak	Light Grey	45,58%	26640373	Tisse	Light	30,19%	26640279
Rustic Oak	Natural	35,52%	26640374	Tisse	Brown	12,11%	26640280
Rustic Oak	Beige	34,56%	26640375	Tisse	Red	12,31%	26640281
Rustic Oak	Brown	20,49%	26640376	Tisse	Blue	13,05%	26640282
Rustic Oak	Medium Brown	19,91%	26640377	Tisse	Green	20,32%	26640283
Scandinavian Oak	Light Beige	46,86%	26640333	Trend Line	Black	11,10%	26640284
Scandinavian Oak	Medium Beige	38,13%	26640334	Trend Line	Interferential	10,60%	26640285
Scandinavian Oak	Dark Beige	38,75%	26640335	Trend Line	Silver	24,61%	26640286
Scandinavian Oak	Light Grey	45,99%	26640336	Twine	Light Grey	32,60%	26640362
Scandinavian Oak	Medium Grey	39,50%	26640337	Twine	Medium Grey	25,16%	26640363
Scandinavian Oak	Dark Grey	21,63%	26640338	Twine	Dark Grey	15,91%	26640364
Trend Line	Black	11,10%	26640284	Twine	Blue Grey	24,34%	26640365
Trend Line	Interferential	10,60%	26640285	Twine	Turquoise	16,08%	26640366
Trend Line	Silver	24,61%	26640286	Twine	Denim	13,52%	26640367
Vintage Teak	Grey	17,72%	26640692	Twine	Indigo	11,86%	26640368
Vintage Teak	Natural	6,61%	26640693	Twine	Purple	17,18%	26640369
Wenge	Black	6,15%	26640290	Vintage Zinc	Black	5,24%	26640287
Wenge	Natural	6,01%	26640291	Vintage Zinc	Rust	10,10%	26640288
Wenge	Grey	17,66%	26640292	Vintage Zinc	Silver	19,36%	26640289
Wenge	Grege	23,89%	26640315				

PRODUCTS & ACCESSORIES DETAILS

NEW iD INSPIRATION 55/70 - WOOD DESIGNS

Formats - standard 4 bevels

Design	Color	Embossing	12,5 x 122		20 x 122		25 x 122		25 x 150		16,66 x 100	
			iD 55	iD 70	iD 55	iD 70	iD 55	iD 70	iD 55	iD 70	iD 55	iD 70
Antik Oak	Beige	Rustic	24230001	24200001	24231001	24201001	24232001	24202001	24233001	24203001		
Antik Oak	Brown	Rustic	24230002	24200002	24231002	24201002	24232002	24202002	24233002	24203002		
Antik Oak	Dark Grey	Rustic	24230003	24200003	24231003	24201003	24232003	24202003	24233003	24203003		
Antik Oak	Grey	Rustic	24230004	24200004	24231004	24201004	24232004	24202004	24233004	24203004		
Antik Oak	Natural	Rustic	24230005	24200005	24231005	24201005	24232005	24202005	24233005	24203005		
Antik Oak	Light Grey	Rustic	24230006	24200006	24231006	24201006	24232006	24202006	24233006	24203006		
Antik Oak	Anthracite	Rustic	24230007	24200007	24231007	24201007	24232007	24202007	24233007	24203007		
Antik Oak	Middle Grey	Rustic	24230008	24200008	24231008	24201008	24232008	24202008	24233008	24203008		
Brushed Pine	Brown	Rustic	24230013	24200013	24231013	24201013	24232013	24202013				
Brushed Pine	Grey	Rustic	24230014	24200014	24231014	24201014	24232014	24202014				
Brushed Pine	Natural	Rustic	24230015	24200015	24231015	24201015	24232015	24202015				
Brushed Pine	White	Rustic	24230016	24200016	24231016	24201016	24232016	24202016				
Contemporary Oak	Grey	Natural	24230109	24200109	24231109	24201109	24232109	24202109				
Contemporary Oak	Grege	Natural	24230110	24200110	24231110	24201110	24232110	24202110				
Contemporary Oak	Natural	Natural	24230111	24200111	24231111	24201111	24232111	24202111				
Contemporary Oak	Brown	Natural	24230112	24200112	24231112	24201112	24232112	24202112				
Elm	Light Grey	Natural			24231113	24201113	24232113	24202113	24233113	24203113		
Elm	Beige	Natural			24231114	24201114	24232114	24202114	24233114	24203114		
Elm	Natural	Natural			24231115	24201115	24232115	24202115	24233115	24203115		
Elm	Grege	Natural			24231116	24201116	24232116	24202116	24233116	24203116		
Elm	Brown	Natural			24231117	24201117	24232117	24202117	24233117	24203117		
English Oak	Beige	Natural	24230024	24200024	24231024	24201024	24232024	24202024				
English Oak	Brown	Natural	24230025	24200025	24231025	24201025	24232025	24202025				
English Oak	Light	Natural	24230026	24200026	24231026	24201026	24232026	24202026				
English Oak	Natural	Natural	24230027	24200027	24231027	24201027	24232027	24202027				
English Oak	Light Beige	Natural	24230028	24200028	24231028	24201028	24232028	24202028				
English Oak	Grey Beige	Natural	24230029	24200029	24231029	24201029	24232029	24202029				
Pallet Pine	White	Weathered			24231030	24201030	24232030	24202030				
Pallet Pine	Beige	Weathered			24231031	24201031	24232031	24202031				
Pallet Pine	Natural	Weathered			24231032	24201032	24232032	24202032				
Pallet Pine	Brown	Weathered			24231033	24201033	24232033	24202033				
Patina Ash	Beige	Weathered	24230106	24200106	24231106	24201106	24232106	24202106				
Patina Ash	Brown	Weathered	24230107	24200107	24231107	24201107	24232107	24202107				
Patina Ash	Grey	Weathered	24230108	24200108	24231108	24201108	24232108	24202108				
Rustic Oak	Stone Brown	Natural	24230121	24200121	24231121	24201121	24232121	24202121	24233121	24203121		
Rustic Oak	Dark Grey	Natural	24230122	24200122	24231122	24201122	24232122	24202122	24233122	24203122		
Rustic Oak	Medium Grey	Natural	24230123	24200123	24231123	24201123	24232123	24202123	24233123	24203123		
Rustic Oak	Light Grey	Natural	24230124	24200124	24231124	24201124	24232124	24202124	24233124	24203124		
Rustic Oak	Natural	Natural	24230125	24200125	24231125	24201125	24232125	24202125	24233125	24203125		
Rustic Oak	Beige	Natural	24230126	24200126	24231126	24201126	24232126	24202126	24233126	24203126		
Rustic Oak	Brown	Natural	24230127	24200127	24231127	24201127	24232127	24202127	24233127	24203127		
Rustic Oak	Medium Brown	Natural	24230128	24200128	24231128	24201128	24232128	24202128	24233128	24203128		
Scandinavian Oak	Light Beige	Weathered	24230100	24200100	24231100	24201100	24232100	24202100				
Scandinavian Oak	Medium Beige	Weathered	24230101	24200101	24231101	24201101	24232101	24202101				
Scandinavian Oak	Dark Beige	Weathered	24230102	24200102	24231102	24201102	24232102	24202102				
Scandinavian Oak	Light Grey	Weathered	24230103	24200103	24231103	24201103	24232103	24202103				
Scandinavian Oak	Medium Grey	Weathered	24230104	24200104	24231104	24201104	24232104	24202104				
Scandinavian Oak	Dark Grey	Weathered	24230105	24200105	24231105	24201105	24232105	24202105				
Trend Line	Black	Brushed Alu									24235088	24205088
Trend Line	Interferential	Brushed Alu									24235089	24205089
Trend Line	Silver	Brushed Alu									24235090	24205090
Vintage Teak	Grey	Weathered	24230092	24200092	24231092	24201092	24232092	24202092				
Vintage Teak	Natural	Weathered	24230093	24200093	24231093	24201093	24232093	24202093				
Wenge	Black	Soft wood									24235009	24205009
Wenge	Natural	Soft wood									24235010	24205010
Wenge	Grey	Soft wood									24235011	24205011
Wenge	Grege	Soft wood									24235012	24205012

NEW iD INSPIRATION 55/70 - WOOD DESIGNS

Formats - standard 4 bevels

Design	Color	Embossing	25 x 50		50 x 50		50 x 100		100 x 100	
			iD 55	iD 70	iD 55	iD 70	iD 55	iD 70	iD 55	iD 70
Bardiglio	Lime Stone	Flat			24237034	24207034	24238034	24208034	24239034	24209034
Bardiglio	Grey	Flat			24237035	24207035	24238035	24208035	24239035	24209035
Bardiglio	Dark Grey	Flat			24237036	24207036	24238036	24208036	24239036	24209036
Bardiglio	Anthracite	Flat			24237037	24207037	24238037	24208037	24239037	24209037
Caviar	Misty Grey	Flat			24237017	24207017			24239017	24209017
Caviar	Tobacco	Flat			24237018	24207018			24239018	24209018
Caviar	Grey	Flat			24237019	24207019			24239019	24209019
Caviar	Brown	Flat			24237020	24207020			24239020	24209020
Caviar	Mauve	Flat			24237021	24207021			24239021	24209021
Caviar	Beige	Flat			24237022	24207022			24239022	24209022
Caviar	Foggy Blue	Flat			24237023	24207023			24239023	24209023
Composite	Warm Grey	Beton	24236072	24206072	24237072	24207072	24238072	24208072		
Composite	Cool Grey	Beton	24236073	24206073	24237073	24207073	24238073	24208073		
Composite	Black	Beton	24236074	24206074	24237074	24207074	24238074	24208074		
Metal Frame	Rose	Flat			24237078	24207078			24239078	24209078
Metal Frame	Platinum	Flat			24237079	24207079			24239079	24209079
Metal Frame	Aluminium	Flat			24237080	24207080			24239080	24209080
Metal Frame	Stainless	Flat			24237081	24207081			24239081	24209081
Oxide	Copper	Flat			24237118	24207118	24238118	24208118	24239118	24209118
Oxide	Steel	Flat			24237119	24207119	24238119	24208119	24239119	24209119
Oxide	Black Steel	Flat			24237120	24207120	24238120	24208120	24239120	24209120
Polished Concrete	Light Grey	Beton	24236075	24206075	24237075	24207075	24238075	24208075		
Polished Concrete	Medium Grey	Beton	24236076	24206076	24237076	24207076	24238076	24208076		
Polished Concrete	Dark Grey	Beton	24236077	24206077	24237077	24207077	24238077	24208077		
Rock	Beige	Stone	24236062	24206062	24237062	24207062			24239062	24209062
Rock	Black	Stone	24236063	24206063	24237063	24207063			24239063	24209063
Rock	Brown	Stone	24236064	24206064	24237064	24207064			24239064	24209064
Rock	Grege	Stone	24236065	24206065	24237065	24207065			24239065	24209065
Rock	Grey	Stone	24236066	24206066	24237066	24207066			24239066	24209066
Rustic Slate	Black	Slate			24237069	24207069	24238069	24208069	24239069	24209069
Rustic Slate	Beige	Slate			24237070	24207070	24238070	24208070	24239070	24209070
Rustic Slate	Grey	Slate			24237071	24207071	24238071	24208071	24239071	24209071
Terrazzo	Grey	Beton			24237129	24207129	24238129	24208129	24239129	24209129
Terrazzo	Green	Beton			24237130	24207130	24238130	24208130	24239130	24209130
Terrazzo	Anthracite	Beton			24237131	24207131	24238131	24208131	24239131	24209131
Tisse	Beige	Textstyle			24237082	24207082	24238082	24208082		
Tisse	Black	Textstyle			24237083	24207083	24238083	24208083		
Tisse	Light	Textstyle			24237084	24207084	24238084	24208084		
Tisse	Brown	Textstyle			24237085	24207085	24238085	24208085		
Tisse	Red	Textstyle			24237086	24207086	24238086	24208086		
Tisse	Blue	Textstyle			24237087	24207087	24238087	24208087		
Tisse	Green	Textstyle			24237091	24207091	24238091	24208091		
Trend Line	Black	Brushed Alu			24237088	24207088	24238088	24208088		
Trend Line	Interferential	Brushed Alu			24237089	24207089	24238089	24208089		
Trend Line	Silver	Brushed Alu			24237090	24207090	24238090	24208090		
Twine	Light Grey	Brushed Alu	24236038	24206038	24237038	24207038	24238038	24208038		
Twine	Medium Grey	Brushed Alu	24236039	24206039	24237039	24207039				

TECHNICAL DATA iD INSPIRATION 40

Certification & classification	Standards	iD Inspiration 40
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering
Classification	EN ISO 10874	Domestic: 23 Commercial: 32 Industrial: 41
Technical characteristics		
Total thickness	EN ISO 24346	2,2 mm
Wear layer thickness	EN ISO 24340	0,4 mm
Total weight	EN ISO 23997	3700 g/m ²
Wear layer binder content	EN ISO 10582	Type I
Dimensions	EN ISO 24342	16,66 x 100 cm, 25 planks/box = 4,17 m ² 20 x 122 cm, 17 planks/box = 4,15 m ² 50 x 50 cm, 17 tiles/box = 4,25 m ² 50 x 100 cm, 8 tiles/box = 4,00 m ²
Surface treatment (PUR)		TopCleanXP™
Beveled edges		No
Technical performances		
Dimensional stability	EN ISO 23999	≤ 0,10 %
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	B _n -s1 glued over concrete substrate B _n -s1 glued over wood substrate
Residual indentation	EN ISO 24343-1	≤ 0,05 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔL _w = 3 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,e,w} < 85 dB)
Thermal resistance	EN ISO 10456	0,02 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Chemical resistance	EN ISO 26987	Not affected (0)
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing μ ≥ 0,30
Electrical properties	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Underfloor heating		Suitable - max. 27 °C

The above information is subject to modification for the benefit of further improvement. (01/17).

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

CUSTOMS TARIFF : 4820 5000 00

iD Inspiration 40



PRODUCTS & ACCESSORIES DETAILS

DESIGN	COLOUR	20 x 122 cm	16.6 x 100 cm	50 x 50 cm	50 x 100 cm	LRV	SKIRTING
Antik Oak	Light Brown	24260132				29,30%	26640 381
	White	24260133				36,56%	26640 382
	Grege	24260134				38,05%	26640 383
	Classical	24260135				33,43%	26640 384
Brushed Pine	Dark Brown	24260136				12,48%	26640 385
	White	24260016				42,66%	26640 266
	Natural Grey	24260137				29,59%	26640 387
English Oak	Light Brown	24260138				28,41%	26640 388
	Grege	24260139				32,87%	26640 389
	Dark Brown	24260140				9,16%	26640 390
Large Beech	Classical	24260141				30,06%	26640 391
	Natural		24261142			31,08%	26640 392
Maple	Studio		24261143			44,82%	26640 393
	White	24260144				21,04%	26640 394
Modern Oak	Beige	24260145				43,49%	26640 395
	Classical	24260146				33,86%	26640 396
Rock	Grey			24262066		34,79%	26640 273
	Natural Grey			24262147		39,13%	26640 398
Soft Walnut	Red Brown	24260147				8,25%	26640 399
	Classical	24260149				17,24%	26640 400
Vintage Zinc	Alu				24263150	17,67%	26640 401
	Light	24260151				53,50%	26640 402
White Oak	Grey	24260152				34,89%	26640 403
	Black	24260153				8,44%	26640 404
Polished Concrete	Light Grey			24262075		41,57%	26640 319
	Medium Grey			24262076		31%	26640 320
	Dark Grey			24262077		17,32%	26640 321
Patina Ash	Beige	24260106				43,21%	26640 343
	Brown	24260107				29,79%	26640 344
Rustic Oak	Grey	24260108				31,03%	26640 345
	Medium Grey	24260123				21,68%	26640 372
	Light Grey	24260124				45,58%	26640 373
	Natural	24260125				35,52%	26640 374
	Brown	24260127				20,49%	26640 376

TECHNICAL DATA iD ESSENTIAL 30

Certification & classification	Standards	iD Essential 30
Type of floor covering	EN ISO 10582	Compact Resilient Floorcovering
CE certification	EN 14041	Yes
Classification	EN ISO 10874 (EN 685)	Domestic: 23 Commercial: 31
Technical characteristics		
Total thickness	EN ISO 24346 (EN 428)	2,0 mm
Wear layer thickness	EN ISO 24340	0,3 mm
Total weight	EN ISO 23997	3400 g/m ²
Wear layer binder content	EN ISO 10582	Type I
Dimensions	EN ISO 24342 (EN 427)	
	Planks	15.2 x 91.4 cm - 24 planks /box = 3.34 m ² art. no. 3976 ___ 3 digit colour number 22.9 x 121.9 cm art. no. 3977 / 24707 ___ 3 digit colour number
	Tiles	30.5 x 61.0 cm - 18 tiles/box = 3.34 m ² art. no. 3979 ___ 3 digit colour number
Surface treatment (PUR)		TopCleanXP™
Beveled edges		No
Technical performances		
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0,25 %
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2 mm
Reaction to fire	EN 13501-1	B _n -s1 glued over A2fl or A1fl substrate (concrete)
Residual indentation	EN ISO 24343-1 (EN 433)	Required value: ≤ 0,10 mm Average measured value: 0,03 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔL _w = 4 dB
Thermal resistance	EN ISO 10456	0,07 m ² K/W
Light fastness	EN ISO 105-B02	≥ 6
Slip resistance	DIN 51130 EN 13893	R9
Electrical properties	EN 1815 EN 1081	< 2 kV on concrete R _t > 10 ¹⁰ Ω
Resistance to chemicals	EN ISO 26987 (EN 423)	Good resistance
Underfloor heating		Suitable - max. 27 °C

The above information is subject to modification for the benefit of further improvement. (01/17).

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

CUSTOMS TARIFF : 4820 5000 00



PRODUCTS & ACCESSORIES DETAILS

DESIGN	COLOUR	22.9 x 121.9 cm	15.2 x 91.4 cm	61 x 30.5 cm	LRV	SKIRTING
Aspen Oak	Grey	3977 013			22,60%	
	Beige	3977 014			43,70%	
	Natural	3977 016			20,80%	
Beech	Natural		3976 020		29,80%	
	Beige	24707 009			44,20%	26640 707
Cerused Oak	Light Brown	24707 010			29,80%	26641 709
	Brown	24707 011			24,40%	26642 708
Country Oak	Brown	24707 000			11,40%	
	Beige	24707 001			23,60%	26640 738
	Natural	24707 002			13,30%	26640 737
Maple	Grey	24707 003			22,10%	26640 736
	Natural		3976 031		43,10%	
Original Slate	Black			3979 006	4,20%	
	Grey			3979 007	35,00%	
Primary Pine	Dark Brown	3977 017			11,90%	
	Grege	3977 018			30,10%	
	Dark Grey	3977 019			20,30%	
	Natural	3977 020			21,90%	
Sandstone	White	3978 021			57,60%	
	Black			3979 004	6,60%	
	Brown			3979 005	15,60%	
Scratched Metal	Grey			3979 008	20,60%	
	Black	3977 000			4,30%	
Smoked Oak	Brown	3977 001			10,10%	26640 712
	Natural	3977 002			18%	
	Dark Grey	3977 003			15%	26640 711
	Light Grey	3977 004			30,80%	26640 710
	White	3977 005			49,90%	
Soft Oak	Brown	3977 007			14,60%	
	Natural	3977 008	3976 008		22,30%	26640 715
	Beige	3977 009	3976 009		31,40%	26640 717
	Light Grey	3977 010	3976 010		23,70%	26640 719
	White	3977 011			53%	
Venezia	Light Brown	3977 012	3976 012		30,50%	26640 718
	Light Beige	3977 015			40,60%	26640 716
	Grey			3979 001	21,30%	26640 724
Walnut	Beige			3979 002	41,90%	
	Light Brown		3976 034		19%	
Washed Pine	White	24707 004			40,20%	26640 706
	Beige	24707 005			44,40%	26640 704
	Light Brown	24707 006			32,80%	26640 705
	Snow	24707 007			57,20%	26640 702
	Blue	24707 008			26,70%	26640 703

TECHNICAL DATA iD INSPIRATION CLICK

Certification & classification	Standards	iD Inspiration Click
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering
Classification	EN ISO 10874	Domestic: 23 Commercial: 33 Industrial: 42
Technical characteristics		
Total thickness	EN ISO 24346	4,5 mm
Wear layer thickness	EN ISO 24340	0,55
Total weight	EN ISO 23997	8000 g/m ²
Wear layer binder content	EN ISO 10582	Type I
Dimensions	EN ISO 24342	19,05 x 121,10 cm, 7 planks/box = 1,61 m ² 24,05 x 149,10 cm, 5 planks/box = 1,79 m ² 32,38 x 60,10 cm, 9 tiles/box = 1,75 m ²
Surface treatment (PUR)		Yes - TopCleanXP™
Beveled edges		Yes
Technical performances		
Dimensional stability	EN ISO 23999	≤ 0,10 %
Reaction to fire	EN 13501-1	B _n -s1 loose laid over concrete substrate
Residual indentation	EN ISO 24343-1	≤ 0,10 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,r,w} < 85 dB)
Impact sound reduction	EN ISO 717-2	ΔL _w = 3 dB
Thermal resistance	ISO 10456	0,04 m ² K/W
Light fastness	EN ISO 105-B02	≥ 6
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing μ ≥ 0,30
Chemical resistance	EN ISO 26987	Not affected (0)
Electrical properties	EN 1815 EN 1081	< 2 kV on concrete ≥ 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Underfloor heating		Suitable - max. 27 °C

The above information is subject to modification for the benefit of further improvement. (01/17).

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

CUSTOMS TARIFF : 4820 5000 00

PRODUCTS & ACCESSORIES DETAILS

DESIGN	COLOUR	19.05 x 121.10 cm	24.05 x 149.10 cm	32.38 x 60.10 cm	LRV	SKIRTING
Contemporary Oak	Grey		24265109		28,20%	26640 346
	Grege		24265110		30,32%	26640 347
	Natural		24265111		26,42%	26640 348
	Brown		24265112		16,06%	26640 349
Elm	Light Grey		24265113		45,88%	26640 350
	Beige		24265114		45,40%	26640 351
	Natural		24265115		38,47%	26640 352
Oxide	Copper			24266118	10,85%	26640 359
	Steel			24266119	18,07%	26640 360
	Black Steel			24266120	10,67%	26640 361
Patina Ash	Beige	24264106			43,21%	26640 343
	Brown	24264107			29,79%	26640 344
	Grey	24264108			31,03%	26640 345
Rustic Oak	Stone Brown	24264121			7,25%	26640 370
	Dark Grey	24264122			14,18%	26640 371
	Medium Grey	24264123			21,68%	26640 372
	Light Grey	24264124			45,58%	26640 373
Terrazzo	Grey			24266129	23,18%	26640 378
	Green			24266130	24,02%	26640 379
	Anthracite			24266131	9,42%	26640 380

iD Inspiration Click



According to Classification ISO 10874 - EN 685



TECHNICAL DATA iD ESSENTIAL CLICK

Certification & classification	Standards	iD Essential Click
Type of floor covering	EN ISO 10582	Compact Resilient Floorcovering
CE certification	EN 14041	Yes
Classification	EN ISO 10874 (EN 685)	Residential: 23 Commercial: 31
Technical characteristics		
Total thickness	EN ISO 24346	4,0 mm
Wear layer thickness	EN ISO 24340	0,30 mm
Total weight	EN ISO 23997	7400 g/m ²
Wear layer binder content	EN ISO 10582	Type I
Dimensions	EN ISO 24342	
	Planks	18.3 x 122 cm 9 planks/box (= 2.009 m ²)
	Tiles	31 x 60.3 cm 9 tiles/box (= 1.682 m ²)
Surface treatment (PUR)		Yes - TopClean™
Beveled edges		Yes - micro bevel
Technical performances		
Dimensional stability	EN ISO 23999	≤ 0,10 %
Reaction to fire	EN 13501-1	B _{fl} -s1 over concrete and wood substrate
Residual indentation	EN ISO 24343-1	≤ 0,08 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918	No damage
Reduction of in room impact noise	NF S31-074	78 dB (Class C - L _{n,e,w} < 85 dB)
Impact sound reduction	EN ISO 717-2	ΔL _w = 5 dB 13 dB with Tarkomfort Pro
Thermal resistance	ISO 10456	0,03 m ² K/W
Light fastness	EN ISO 105-B02	≥ 6
Slip resistance	EN 13893 DIN 51130	μ ≥ 0.30 DS R9 (tiles) R10 (planks)
Electrical properties	EN 1815 EN 1081	ca. 10 ⁹ Ω
Resistance to chemicals	EN ISO 26987	High resistance
Underfloor heating		Suitable - max. 27 °C

The above information is subject to modification for the benefit of further improvement. (01/17).


Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

CUSTOMS TARIFF : 4820 5000 00

PRODUCTS & ACCESSORIES DETAILS

DESIGN	COLOUR	18.3 x 122 cm	31 x 60.3 cm	LRV	SKIRTING
Delicate Oak	Natural	24722002		17,3%	26640 715
Limewashed Oak	Beige	24722000		47,5	26640 707
	Brown	24722001		20,7%	26640 708
Rust Metal	Brown		24723001	7,4%	26640 726
	Black		24723002	4,8%	26640 727
Stone	Grey		24723000	27,2%	26640 724
Toasted Oak	Light Grey	24722003		26,7%	26640 710
	Dark Grey	24722004		16,5%	26640 711

iD Essential Click



TECHNICAL DATA iD INSPIRATION LOOSE-LAY

Certification & classification	Standards	iD Inspiration Loose-Lay
Type of floor covering	EN ISO 10582	Compact resilient floor covering
CE certification	EN 14041	Yes
Classification	EN ISO 10874 (EN 685)	Commercial: 33 Industrial: 42
Technical characteristics		
Total thickness	EN ISO 24346	4,5 mm
Wear layer thickness	EN ISO 24340	0,55 mm
Total weight	EN ISO 23997	7500 g/m ²
Wear layer binder content	EN ISO 10582	Type I
Dimensions	EN ISO 24342 (EN 427)	22.9 x 121.9 cm 10 planks/box (= 2.79 m ² - 20.9 kg) 52 boxes/pallet (= 145.08 m ² m ² - 1088.1 kg) 30.5 x 61 cm 14 tiles/box (= 2.6 m ² - 19.5 kg) 54 boxes/pallet (= 140.4 m ² - 1053 kg)
Surface treatment (PUR)		Yes
Beveled edges		No
Technical performances		
Dimensional stability	EN ISO 23999	≤ 0,10 %
Reaction to fire	EN 13501-1	B _n -s1
Residual indentation	EN ISO 24343-1	≤ 0,10 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	8 dB
Thermal resistance	ISO 10456	0,04 m ² K/W
Light fastness	EN ISO 105-B02	≥ 6
Slip resistance	DIN 51130 EN 13893	μ ≥ 0.30 DS R9
Electrical properties	EN 1815 EN 1081	ca. 10 ¹¹ Ω
Resistance to chemicals	EN ISO 26987	High resistance

The above information is subject to modification for the benefit of further improvement. (01/17).

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

CUSTOMS TARIFF : 4820 5000 00

PRODUCTS & ACCESSORIES DETAILS

DESIGN	COLOUR	22.9 x 121.9 cm	61 x 30.5 cm	LRV	SKIRTING
Beach Wood	Beige	24640009		35,6%	26640 753
	Grey	24640010		35,7%	26640 754
Béton	White		24641000	63,1%	26640 740
	Black		24641001	4,9%	26640 741
	Grey		24641002	17,5%	26640 739
Christmas Pine	White	24640006		53,1%	26640 746
	Natural	24640007		20,7%	26640 745
Delicate Wood	Brown	24640008		15,7%	26640 744
	White	24640011		50,4%	26640 758
Elegant Oak	Grege	24640012		23,3%	26640 760
	Black	24640013		7,0%	26640 759
Limed Oak	Beige	24640014		31,5%	26640 743
	Natural	24640015		24,3%	26640 742
Mountain Oak	Beige	24640000		48,9%	26640 750
	Grey	24640001		24,3%	26640 751
	Brown	24640002		6,5%	26640 752
Sawn Oak	Natural	24640003		21,6%	26640 749
	Brown	24640004		15,6%	26640 748
Sawn Oak	Black	24640005		5,3%	26640 747
	Grey	24640016		18,0%	26640 755
	Brown	24640017		17,1%	26640 756
	Dark Brown	24640018		9,9%	26640 757



TECHNICAL DATA iD SQUARE

Certification & classification	Standards	iD Square
Type of floor covering	EN ISO 10582	Acoustic resilient floor covering
CE certification	EN 14041	Yes
Classification	EN ISO 10874 (EN 685)	Commercial very heavy: 34
Technical characteristics		
Total thickness	EN ISO 24346	4.5 mm
Wear layer thickness	EN ISO 24340	0.80 mm
Total weight	EN ISO 23997	5195 g/m ²
Wear layer binder content	EN ISO 10582	Type I
Dimensions	EN ISO 24342 (EN 427)	
	Planks	25 x 100 cm 9 planks/box (= 2.25 m ² - 12 kg) - 48 boxes/pallet
		50 x 50 cm 9 tiles/box (= 2.25 m ² - 12 kg) - 48 boxes/pallet
	Tiles	66 x 66 cm 5 tiles/box (= 2.22 m ² - 12 kg) - 26 boxes/pallet
Technical performances		
Dimensional stability	EN ISO 23999	≤ 0,10 %
Reaction to fire	EN 13501-1	B _{fl} s1 loose-laid or glued over any A _{2fl} or A _{1fl} substrate (concrete) C _{fl} s1 loose-laid or glued over any derivate wood substrate
Residual indentation	Average measured value EN ISO 24343-1 requirement	0,15 mm ≤ 0,20 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Reduction of in room impact noise	NF S 31-074	Class B - L _{n,e,w} = < 75 dB
Impact sound reduction	EN ISO 717-2	ΔL _w = 15 dB (±1 dB)
Thermal resistance	ISO 10456	0,04 m ² K/W
Acoustical absorption	EN ISO 11654	α _w = 0,05
Light fastness	EN ISO 105-B02	≥ 6
Slip resistance	EN 13893 DIN 51130	μ ≥ 0,30 R9
Electrical properties	EN 1081	R _i > 10 ¹⁰ Ohm
Resistance to chemicals	EN ISO 26987	High resistance

The above information is subject to modification for the benefit of further improvement. (01/17).

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

CUSTOMS TARIFF: 4820 5000 00

PRODUCTS & ACCESSORIES DETAILS

DESIGN	COLOUR	25 x 100 cm	50 x 50 cm	66 x 66 cm	LRV
Dashes	Blue		24562100		11,06%
	Grey		24562101		17,39%
	Light Grey		24562102		30,4%
	Purple		24562103		16,38%
	Green		24562104		14,95%
Fabrics	Grege		24562000		10,21%
	Light Grey		24562001		33,47%
	Grey		24562002		26,64%
Grid	Metalic			24566000	30,77%
	Metalic Blue			24566001	24,47%
	Black			24566002	8,3%
	Grey			24566003	20,36%
Minimal Wood	Natural	24567100	24563100		19,1%
	Grey	24567101	24563101		21,97%
	Dark Grey	24567102	24563102		18,26%
Patchwood	White		24563200		35,95%
	Grey		24563201		22,16%
Patchwork	Light Grey		24560026		30,67%
	Anthracite		24560024		13,54%
	Chocolat		24564042		12,24%
Patine	Gris		24564002		24,65%
	Anthracite		24564044		16,1%
	Light Chocolate		24564040		28,89%
	Blue		24564045		13,94%
	Dark Anthracite		24564046		9,79%
	Red		24564048		28,98%
Plateau Ash	Grey	24567009	24563009		22,71%
	Dark Grey		24560032		14,57%
Tisse	Chocolat		24560033		18,65%
	Ligth Grey		24560035		35,46%
	Dark Grey			24565000	18,78%
Vintage Zinc	Beige			24565001	24,66%
	Metalic			24565002	27,78%
	Grege			24565003	10,28%
	Ligth Copper			24565004	19,73%
Zen	Brown		24560014		20,9%
	Grey		24560022		15,17%

iD Square



According to Classification ISO 10874



TECHNICAL DATA iD TILT

Certification & classification	Standards	iD Tilt
Type of floor covering	EN ISO 10582	Modular heterogeneous product with interlocking connection
CE certification	EN 14041	Yes
Classification	EN ISO 10874 (EN 685)	Commercial: 34 Industrial: 43
Technical characteristics		
Total thickness	EN ISO 24346	5,0 mm
Wear layer thickness	EN ISO 24340	0,70 mm
Total weight	EN ISO 23997	7400 g/m ²
Wear layer binder content	EN ISO 10582	Type I
Dimensions	EN ISO 24342 - EN 427 Tiles	91.44 x 91.44 cm (Granite) 3 tiles/box (= 2.51 m ² - 20.10 kg) 45.72 x 45.72 cm (Concrete) 10 tiles/box (= 2.09 m ² - 16.70 kg)
Surface treatment (PUR)		Yes
Technical performances		
Dimensional stability	EN ISO 23999 - EN 434	< 0.15 %
Reaction to fire	EN 13501-1	B _{fl} -s1 over concrete substrate
Residual indentation	EN ISO 24343-1 - EN 433	< 0.10 mm
Furniture leg	ISO 16581 - EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Curl resultant to heat	ISO 23999 - EN 434	≤ 2 mm
Impact sound reduction	EN ISO 717-2	ΔL _w = 6 dB
Thermal resistance	EN ISO 10456	approx. 0,05 m ² K/W
Light fastness	EN ISO 105-B02	≥ 6
Slip resistance	EN 13893 DIN 51130	μ ≥ 0.30 DS R9
Electrical properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ Ω
Resistance to chemicals	EN ISO 26987	Resistance


The above information is subject to modification for the benefit of further improvement. (01/17).

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

CUSTOMS TARIFF : 4820 5000 00

PRODUCTS & ACCESSORIES DETAILS

DESIGN	COLOUR	91.44 x 91.44 cm	45.72 x 45.72 cm	SKIRTING	
				WHITE	ALUMINIUM
Granite	Black	4697 004		26640 700	26640 701
	Grey	4697 005			
	Red	4697 006			
	Blue	4697 007			
Concrete	Beige		24750 000		
	Grey		24750 001		
	Dark Grey		24750 002		



FLOOR IS THE NEW PLAYGROUND

flooristhewnewplayground.tarkett.com

■ **WESTERN EUROPE:** Austria: Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 ■ Belgium: Tarkett France Belux – Tel. +32 16 35 98 80 ■ Denmark: Tarkett A/S – Tel. +45 43 90 60 11 ■ Finland: Tarkett Oy – Tel. +358 9 4257 9000 ■ France: Tarkett SAS – Tel. +33 1 41 20 42 49 ■ Germany: Tarkett Holding GmbH, Bereich Objekt – Tel. +49 62 33 810 ■ Greece: Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340 ■ Italy: Tarkett S.p.A. – Tel. +39 0744 7551 ■ Luxembourg: Tarkett GDL SA – Tel. +352 949 211 8804 ■ Netherlands: Tarkett Holding GmbH, Vestiging Nederland – Tel. +31 416 685 491 ■ Norway: Tarkett AS – Tel. +47 32 20 92 00 ■ Portugal: Tarkett SA – Tel. +351 21 427 64 20 ■ Spain: Tarkett Floors S.L – Tel. +34 91 358 00 35 ■ Sweden: Tarkett Sverige AB – Tel. +46 771 25 19 00 ■ Switzerland: Tarkett Holding GmbH, Bereich Objekt Schweiz – Tel. +41 043 233 79 24 ■ Turkey: Tarkett Aspen – Tel. +90 212 213 65 80 ■ United Kingdom: Tarkett Ltd – Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE: Baltic Countries:** Tarkett Baltics: Tel. +370 37 262 220 ■ Czech Republic: Tarkett France SAS, org. slozka – Tel. +420-271 001 602 ■ Hungary: Tarkett France SAS – Tel. +36 1 437 8150 ■ Poland: Tarkett Polska Sp. z o. o. – Tel. +48 22 16 09 231 ■ Russian Federation: ZA0 Tarkett RUS – Tel. +7 495 775 3737 ■ Slovakia: Tarkett France SAS, org. zlozka – Tel. +421 248 291 317 ■ South East Europe: Tarkett Trade d.o.o. – Tel. +381 21 7557 649 (44) 569 12 21 ■ Ukraine: Tarkett UA – Tel. +38 (0) 44 569 12 21 ■ **ASIA AND OCEANIA:** Australia: Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 ■ China: Tarkett Floor Covering (Shanghai) Co. Ltd. – Tel. +86 (21) 60 95 68 38 ext 841 ■ North East Asia: Tarkett Hong Kong Limited – Tel. +852 2511 8716 ■ India: Tarkett France (India Branch) – Tel. +91 11 4352 4073 ■ South East Asia: Tarkett Flooring Singapore Pte. Ltd. – Tel. +65 6346 1585 ■ **AFRICA:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** Tarkett Middle East: Tel. +961 1 51 3363/4 ■ Israel: Tarkett International: Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA:** USA: Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. +1 440 543 8916 ■ Canada: Tarkett Inc. – Tel. +1 450 293 173 ■ **LATIN AMERICA:** Brazil: Tarkett – Tel. 55 12 3954 7108 ■ Argentina - Chile - Uruguay: Tarkett Latam Mercosur – Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 ■ Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela: Tarkett – Tel. +55 11 98410 9310 / +55 11 95494 0069 ■ Mexico / Central America: Tarkett Latam Mexico – Tel. +55 11 98410 9310



www.tarkett.com