

LUXURY  
VINYL  
TILES


# INSPIRATION CLICK

FLOOR  
IS THE NEW  
PLAYGROUND



THE ULTIMATE  
FLOORING EXPERIENCE



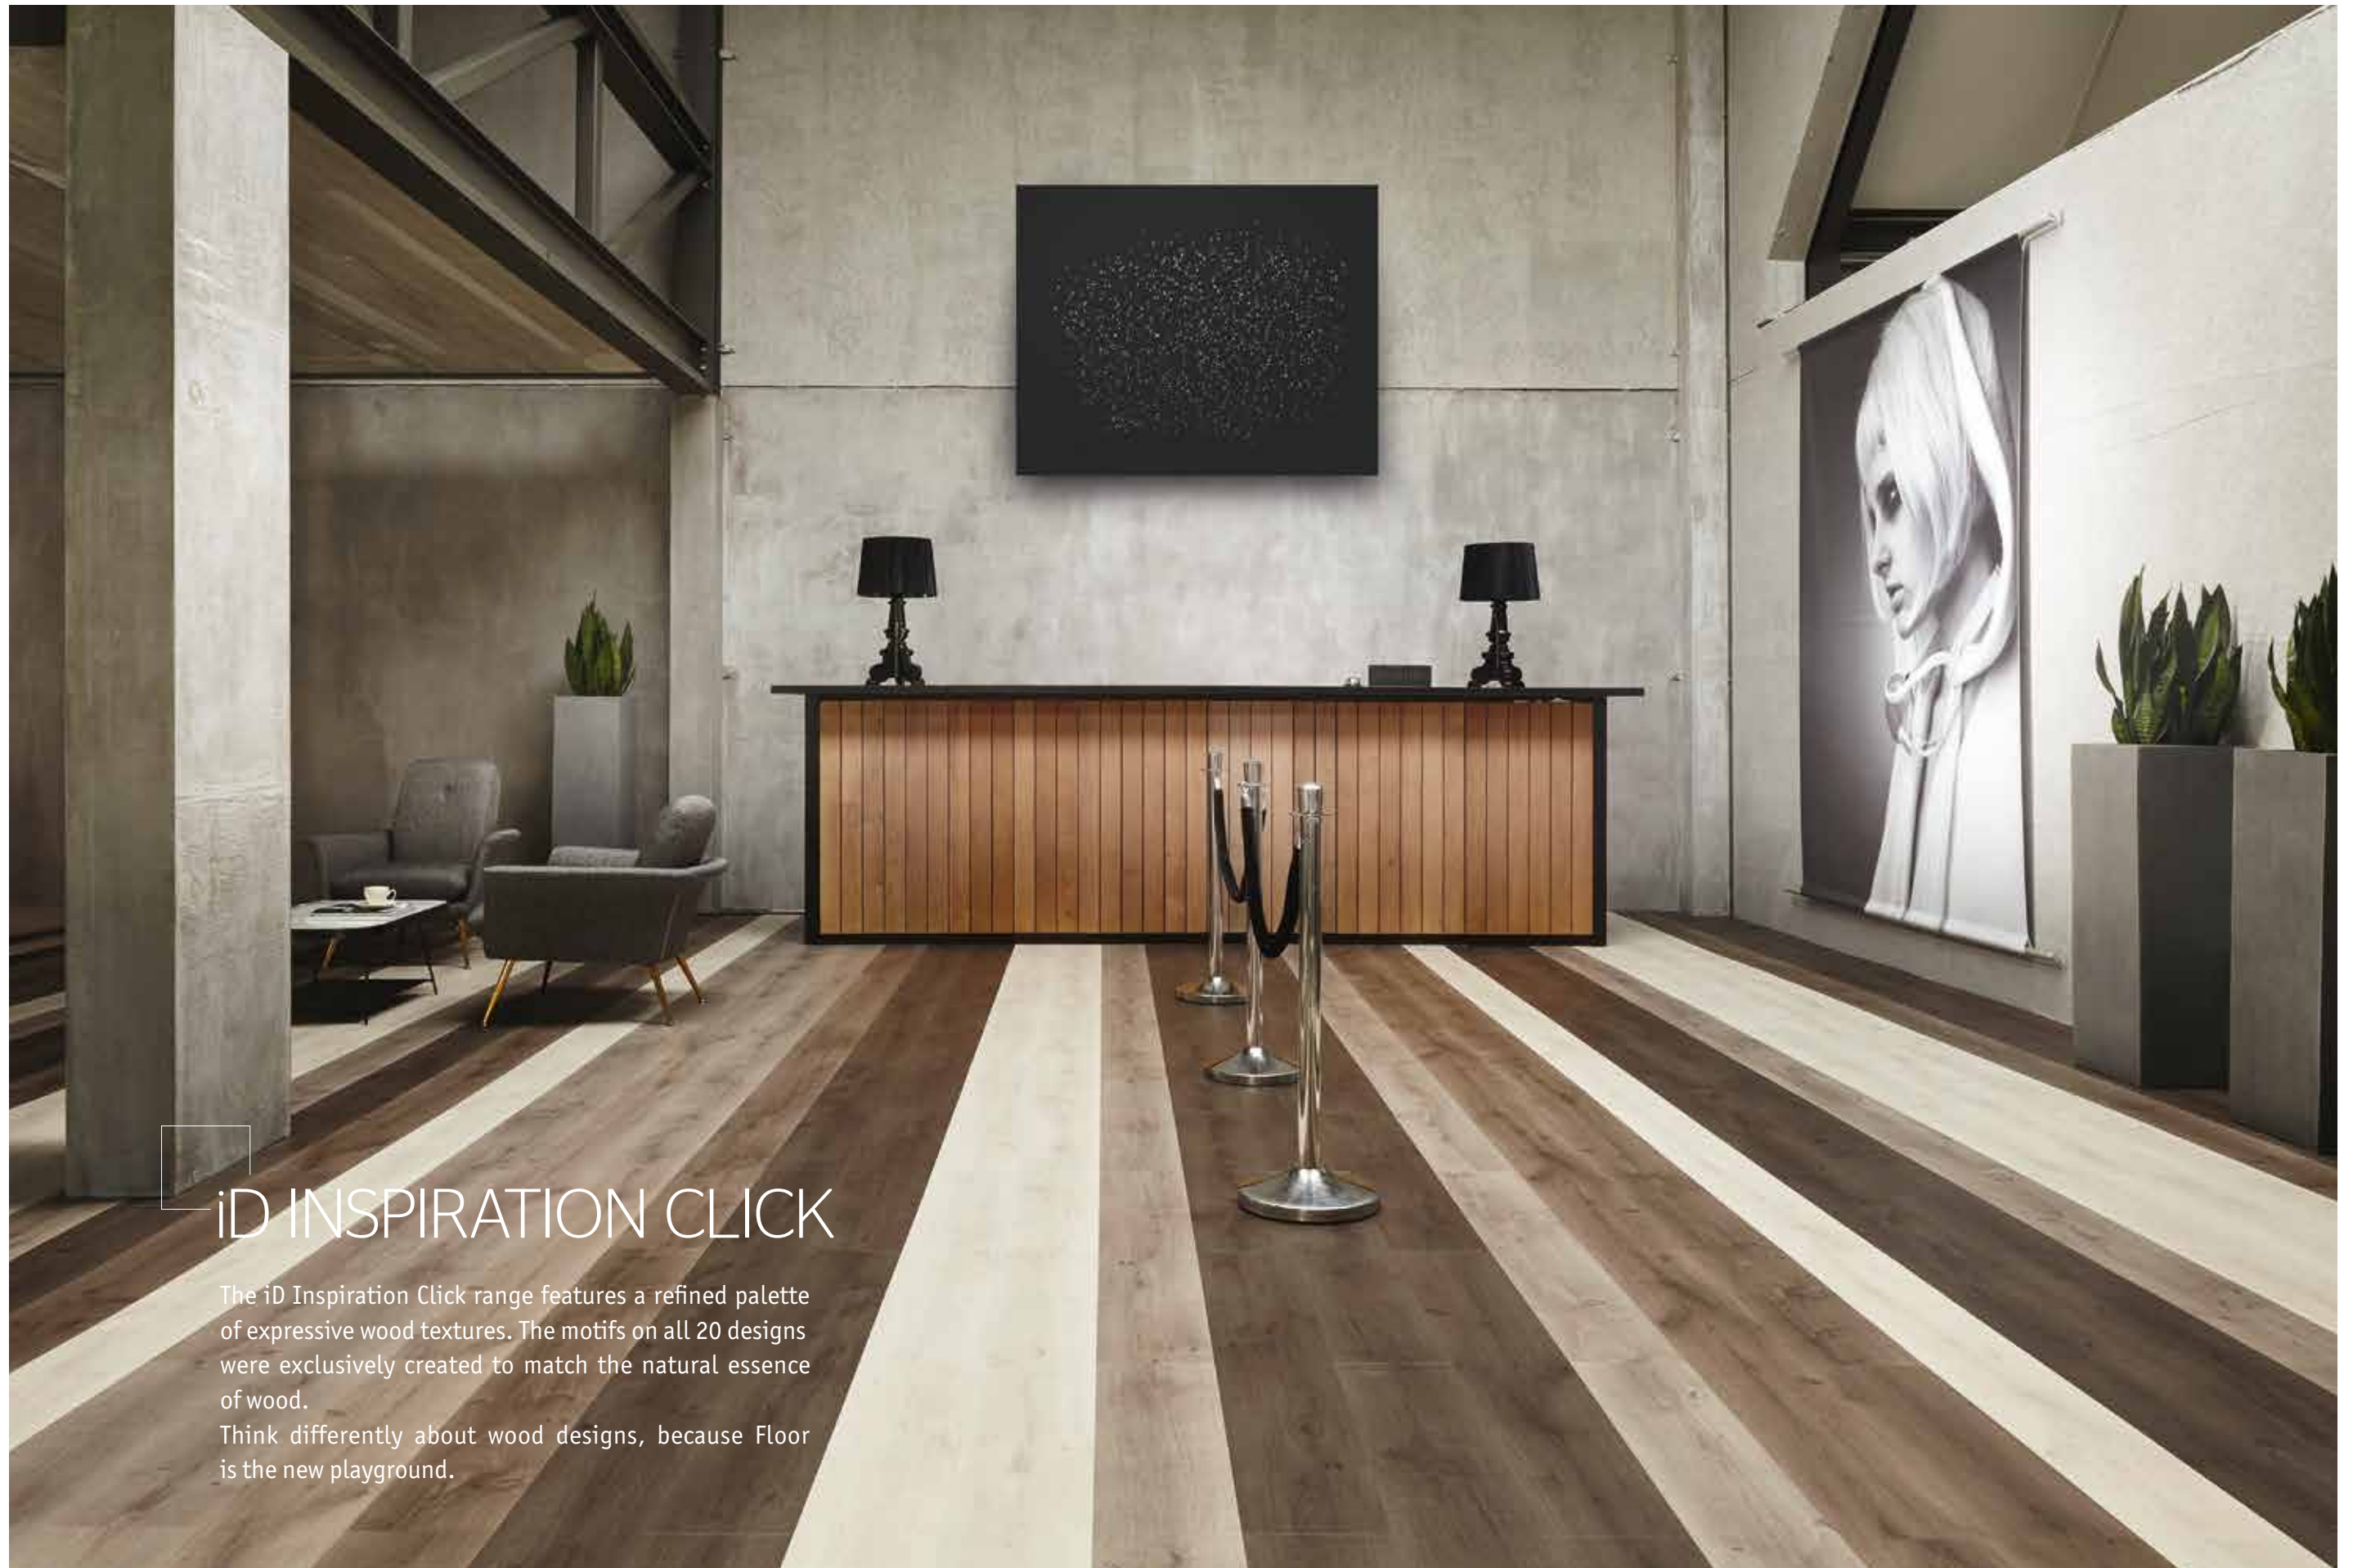

## iD INSPIRATION CLICK

The iD Inspiration Click range features a refined palette of expressive wood textures. The motifs on all 20 designs were exclusively created to match the natural essence of wood.

Think differently about wood designs, because Floor is the new playground.



# iD INSPIRATION CLICK

iD Inspiration Click is an ideal solution for semi-commercial areas. It requires little to no subfloor preparation and can be installed over existing flooring. Its unique click system makes for a floating installation, without the need of glue, making installation 35% quicker than with glue-down products and 15% quicker than with other click systems\*.

The new iD Inspiration Click collection features 20 elegant colours that best express the latest trends.



## THE IDEAL BLEND OF DURABILITY AND SUSTAINABILITY

### Better Indoor Air Quality

- Designed to improve indoor air quality with VOC emissions below quantifiable levels, under 10µg/m<sup>3</sup> after 28 days.

### Hard Wearing and Easy Cleaning

- Treated with TopClean XP™ for a tougher surface and simpler care.

## PRODUCT CONSTRUCTION



- 1 TopClean XP™ PUR reinforcement** for extreme resistance and easy, low-cost maintenance
- 2 Surface embossing** for a more natural look
- 3 0.55mm pure PVC transparent wear layer** for a hard-wearing, indentation-resistant surface compatible with class 33 (heavy commercial) and 42 (general industrial) use
- 4 Design pattern** for 20 different options in high-definition printing
- 5 Core layer with glass-fibre reinforcement** for exceptional dimensional stability and superior performance against tears and indentations
- 6 Stabilising layer** for a curl-free product
- 7 Fold-down Click System**

\*Estimation - not binding







Contemporary Oak / Grey - Grege - Brown

## Woods

<p>CONTEMPORARY OAK</p>  <p>Grege</p> <p>24265 110 24.05 x 149.10 cm LRV: 30.32% Skirting: 26640 347</p>	<p>CONTEMPORARY OAK</p>  <p>Grey</p> <p>24265 109 24.05 x 149.10 cm LRV: 28.20% Skirting: 26640 346</p>	<p>CONTEMPORARY OAK</p>  <p>Natural</p> <p>24265 111 24.05 x 149.10 cm LRV: 26.42% Skirting: 26640 348</p>	<p>CONTEMPORARY OAK</p>  <p>Brown</p> <p>24265 112 24.05 x 149.10 cm LRV: 16.06% Skirting: 26640 349</p>
---	--	---	---

<p>ELM</p>  <p>Light Grey</p> <p>24265 113 24.05 x 149.10 cm LRV: 45.88% Skirting: 26640 350</p>	<p>ELM</p>  <p>Beige</p> <p>24265 114 24.05 x 149.10 cm LRV: 45.40% Skirting: 26640 351</p>	<p>ELM</p>  <p>Natural</p> <p>24265 115 24.05 x 149.10 cm LRV: 38.47% Skirting: 26640 352</p>
--	---	---

<p>PATINA ASH</p>  <p>Beige</p> <p>24264 106 19.05 x 121.10 cm LRV: 43.21% Skirting: 26640 343</p>	<p>PATINA ASH</p>  <p>Grey</p> <p>24264 108 19.05 x 121.10 cm LRV: 31.03% Skirting: 26640 345</p>	<p>PATINA ASH</p>  <p>Brown</p> <p>24264 107 19.05 x 121.10 cm LRV: 29.79% Skirting: 26640 344</p>
---	--	---

<p>RUSTIC OAK</p>  <p>Light Grey</p> <p>24264 124 19.05 x 121.10 cm LRV: 45.58% Skirting: 26640 373</p>	<p>RUSTIC OAK</p>  <p>Medium Grey</p> <p>24264 123 19.05 x 121.10 cm LRV: 21.68% Skirting: 26640 372</p>	<p>RUSTIC OAK</p>  <p>Dark Grey</p> <p>24264 122 19.05 x 121.10 cm LRV: 14.18% Skirting: 26640 371</p>	<p>RUSTIC OAK</p>  <p>Stone Brown</p> <p>24264 121 19.05 x 121.10 cm LRV: 7.25% Skirting: 26640 370</p>
--	---	---	--

## Authentic Stones

<p>TERRAZZO</p>  <p>Green</p> <p>24266 130 32.38 x 60.10 cm LRV: 24.02% Skirting: 26640 379</p>	<p>TERRAZZO</p>  <p>Grey</p> <p>24266 129 32.38 x 60.10 cm LRV: 23.18% Skirting: 26640 378</p>	<p>TERRAZZO</p>  <p>Anthracite</p> <p>24266 131 32.38 x 60.10 cm LRV: 9.42% Skirting: 26640 380</p>
--	---	--

## Material Effects

<p>OXIDE</p>  <p>Copper</p> <p>24266 118 32.38 x 60.10 cm LRV: 10.85% Skirting: 26640 359</p>	<p>OXIDE</p>  <p>Steel</p> <p>24266 119 32.38 x 60.10 cm LRV: 18.07% Skirting: 26640 360</p>	<p>OXIDE</p>  <p>Black Steel</p> <p>24266 120 32.38 x 60.10 cm LRV: 10.67% Skirting: 26640 361</p>
--	---	---



# iD INSPIRATION CLICK

## ACCESSORIES

### TARKOMFORT PREMIUM

- Provides high-impact sound reduction of up to 19dB

**Ref.:** 24992 030 - Black **Packaging:** 1 roll of 1m x 15m



### TARKOMFORT PRO

- Reduces sound up to 13dB
- Removable anti-slip film for easy installation

**Ref.:** 24992 020 - Grey **Packaging:** 1 roll of 1m x 10m



### PVC DECORATIVE SKIRTING

- Compact skirting with decorative film and PUR surface treatment. Perfectly match all 20 iD Inspiration Click designs.

**Packaging:** 2.02lm skirting in packs of 16

### 3D STUD

Accessibility accessory. Ready-to-use podotactile studs to be simply fitted on top of the existing floorcovering.

**Packaging:** 5mm x 25mm stud in pack of 200

### DEDICATED STAIR AND ACCESSIBILITY ACCESSORIES

Aluminium stairnose:  
Silver (1434 011)  
Stainless Steel (1434 012)

Podotactile studs:  
Black (1440 052)  
Grey (1440 051)

		Self-adhesive
	White	1440 050
	Grey	1440 051
	Black	1440 052
	Ivory	1440 053
	Red	1440 054
	Yellow	1440 055

### FLEXIBLE PROFILE

Aluminium profile, to be screwed.  
Silver (1456 011)  
Stainless Steel (1456 012)


**Packaging:** 2.5lm profiles in packs of 10



### TRANSITION PROFILE

Aluminum profile, to be screwed.  
Silver (1451 011)  
Stainless Steel (1451 012)


**Packaging:** 2.7lm profiles in packs of 10

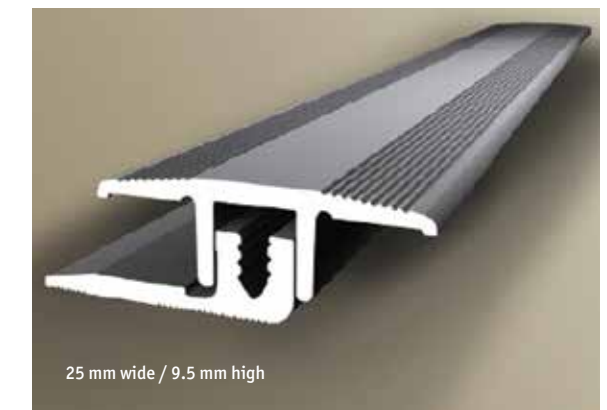

### RAMP PROFILE

Aluminium profile, to be screwed.  
Silver (1454 011)  
Stainless Steel (1454 012)

**Packaging:** 2.7lm profiles in packs of 10

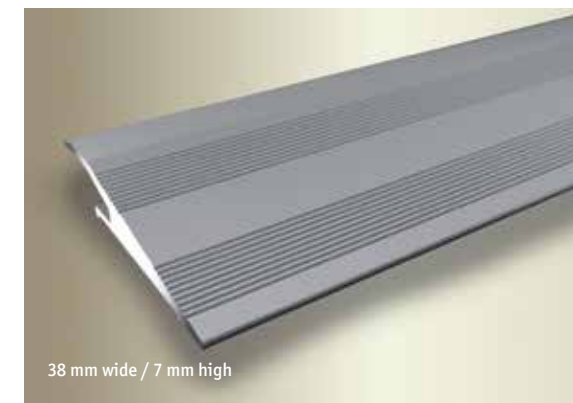

### TRANSITION PROFILE

General Traffic aluminium profile, to be screwed.  
Silver (1451021)  
Stainless Steel (1451022)

**Packaging:** 2.7lm profiles in packs of 10



# iD INSPIRATION CLICK

## ENVIRONMENTAL POLICY

At Tarkett, we are passionately committed to designing, producing and delivering the best products to our customers that also have a positive impact on people, planet and profits. We live according to these goals in everything we do.

We believe in creating a positive future for everyone, based on understanding the big environmental and societal challenges we all face and creating solutions and innovations that meet these needs.

## iD INSPIRATION CLICK

iD Inspiration Click collection is designed for all medium traffic areas in retail, hospitality and work environment. It contributes to improved indoor air quality with VOC emissions below quantifiable level, less than 10µg/m<sup>3</sup> after 28 days which makes the product Asthma and Allergy friendly. The product contributes to people's well-being as it uses a phthalate-free technology, based on alternative plasticizers that can be used for sensitive applications such as the production of toys, food packaging and medical devices.

With a unique surface treatment, cleaning and maintenance is simplified through reduced use of water, energy and chemical detergents.



Patina Ash / Brown - Grey

## TECHNICAL DATA

CERTIFICATION & CLASSIFICATION	STANDARDS	iD Inspiration Click
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering
Classification	EN ISO 10874	Domestic: 23 Commercial: 33 Industrial: 42
TECHNICAL CHARACTERISTICS	STANDARDS	iD Inspiration Click
Total thickness	EN ISO 24346	4,5 mm
Wear layer thickness	EN ISO 24340	0,55
Total weight	EN ISO 23997	8000 g/m <sup>2</sup>
Wear layer binder content	EN ISO 10582	Type I
Dimensions	EN ISO 24342	Planks 19,05 x 121,10 cm, 7 planks/box = 1,61 m <sup>2</sup> 24,05 x 149,10 cm, 5 planks/box = 1,79 m <sup>2</sup> Tiles 32,38 x 60,10 cm, 9 tiles/box = 1,75 m <sup>2</sup> 49,05 x 99,10 cm, 3 tiles/box = 1,46 m <sup>2</sup>
Surface treatment (PUR)		Yes - TopCleanXP™
Bevelled edges		Yes
TECHNICAL PERFORMANCES	STANDARDS	iD Inspiration Click
Dimensional stability	EN ISO 23999	≤ 0,10 %
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	Bi-s1 loose laid over concrete substrate
Residual indentation	EN ISO 24343-1	≤ 0,10 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔLw = 3 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L <sub>n,r,w</sub> < 85 dB)
Thermal resistance	EN ISO 10456	0,04 m <sup>2</sup> K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Chemical resistance	EN ISO 26987	Not affected (0)
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing μ ≥ 0,30
Electrical properties	EN 1815 EN 1081	< 2 kV on concrete ≥ 10 <sup>9</sup> Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Underfloor heating		Suitable - max. 27 °C


Technical data in force upon the date of publication (07/16).

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

CUSTOMS TARIFF : 48205000000F



## Logistics Information



## Surface treatment



## General Information



According to European Classification ISO 10874 - EN 685



# FLOOR IS THE NEW PLAYGROUND

[flooristhewnewplayground.tarkett.com](http://flooristhewnewplayground.tarkett.com)

■ **WESTERN EUROPE:** Austria: Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 ■ Belgium: Tarkett France Belux – Tel. +32 16 35 98 80 ■ Denmark: Tarkett A/S – Tel. +45 43 90 60 11 ■ Finland: Tarkett Oy – Tel. +358 9 4257 9000 ■ France: Tarkett SAS – Tel. +33 1 41 20 42 49 ■ Germany: Tarkett Holding GmbH, Bereich Objekt – Tel. +49 62 33 810 ■ Greece: Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340 ■ Italy: Tarkett S.p.A. – Tel. +39 0744 7551 ■ Luxembourg: Tarkett GDL SA – Tel. +352 949 211 8804 ■ Netherlands: Tarkett Holding GmbH, Vestiging Nederland – Tel. +31 416 685 491 ■ Norway: Tarkett AS – Tel. +47 32 20 92 00 ■ Portugal: Tarkett SA – Tel. +351 21 427 64 20 ■ Spain: Tarkett Floors S.L – Tel. +34 91 358 00 35 ■ Sweden: Tarkett Sverige AB – Tel. +46 771 25 19 00 ■ Switzerland: Tarkett Holding GmbH, Bereich Objekt Schweiz – Tel. +41 043 233 79 24 ■ Turkey: Tarkett Aspen – Tel. +90 212 213 65 80 ■ United Kingdom: Tarkett Ltd – Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE:** Baltic Countries: Tarkett Baltics: Tel. +370 37 262 220 ■ Czech Republic: Tarkett France SAS, org. slozka – Tel. +420-271 001 602 ■ Hungary: Tarkett France SAS – Tel. +36 1 437 8150 ■ Poland: Tarkett Polska Sp. z o.o. – Tel. +48 22 16 09 231 ■ Russian Federation: ZA0 Tarkett RUS – Tel. +7 495 775 3737 ■ Slovakia: Tarkett France SAS, org.zlozka – Tel. +421 248 291 317 ■ South East Europe: Tarkett Trade d.o.o. – Tel. +381 21 7557 649 (44) 569 12 21 ■ Ukraine: Tarkett UA – Tel. +38 (0) 44 569 12 21 ■ **ASIA AND OCEANIA:** Australia: Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 ■ China: Tarkett Floor Covering (Shanghai) Co. Ltd. – Tel. +86 (21) 60 95 68 38 ext 841 ■ North East Asia: Tarkett Hong Kong Limited – Tel. +852 2511 8716 ■ India: Tarkett France (India Branch) – Tel. +91 11 4352 4073 ■ South East Asia: Tarkett Flooring Singapore Pte. Ltd. – Tel. +65 6346 1585 ■ **AFRICA:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** Tarkett Middle East: Tel. +961 1 51 3363/4 ■ Israel: Tarkett International: Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA:** USA: Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. +1 440 543 8916 ■ Canada: Tarkett Inc. – Tel. +1 450 293 173 ■ **LATIN AMERICA:** Brazil: Tarkett – Tel. 55 12 3954 7108 ■ Argentina - Chile - Uruguay: Tarkett Latam Mercosur – Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 ■ Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela: Tarkett – Tel. +55 11 9 8410 9310 / +55 11 95494 0069 ■ Mexico / Central America: Tarkett Latam Mexico – Tel. +55 11 98410 9310



[www.tarkett.com](http://www.tarkett.com)