

WOOD  
COLLECTION

# 2017 PARQUET



THE ULTIMATE  
FLOORING EXPERIENCE





## PARQUET

Wood Flooring Story	p. 4
From Nature to Your Home	p. 5
Environmental Commitment	p. 6
Tarkett Wood Flooring - a Natural Choice	p. 8
Tarkett Wood Flooring Guide	p. 10
Tarkett Ultimate Surface Protection	p. 12

References	p. 16
------------	-------

Our Wood Species	p. 26
Tarkett Wood Ranges	p. 28
Performance Fashion	p. 30
Tango Vintage	p. 32
Tango Art	p. 34
Tango	p. 36
Tango Classic	p. 38
Step L & XL	p. 40
Rumba	p. 42
Salsa Art Vision	p. 44
Salsa Art	p. 46
Salsa Premium	p. 48
Salsa	p. 50
Bolero	p. 52
Samba	p. 54
Perfect Pair Fairytale Collection Overview	p. 56 p. 58

Accessories	p. 72
Installation Guide	p. 77
Installation Options	p. 78
Accessories Installation	p. 84
Care and Maintenance	p. 86
Installer's Tips and Advice	p. 88
Frequently Asked Questions	p. 90





# WOOD FLOORING STORY

## Tradition and innovation

All the knowledge and craftsmanship that the company has possessed since it was founded is expressed in the floors Tarkett produces today. Genuine expertise combined with cutting-edge technology results in new, modern, intelligent and beautiful wood flooring. All in service of finding the best wood flooring solutions that are inspired by nature, long lasting and easy to care for.



## Warranty

Our products and limited warranties allow you to choose wood flooring that is right for you, your lifestyle, and your budget. While a quality product and warranty are extremely important, adequate installation and maintenance of your new Tarkett wood flooring is also crucial to ensure years of enjoyment. Performance Fashion, Tango Vintage, Tango Art, Tango, Tango Classic, Step, Rumba, Salsa Art Vision, Salsa Art, Salsa Premium and Salsa collections have a 30 years warranty. Samba and Bolero collections have a 20 years warranty.



## Quality inspired by nature

Tarkett supports initiative to communicate the benefits of real wood flooring by promoting the Real Wood label. Products with the Real Wood label are natural wood products that can be re-sanded and renovated several times giving your floor a brand new look each time.



## Installation - Enjoy immediately

A simple installation process and a T-lock locking system make fitting boards together even quicker and easier. This smart solution from Tarkett locks the boards closely together without edges and unevenness. You can use your new floor instantly.



## Accessories - Perfect finish

Complimentary accessories range that matches your wood flooring is also available to add the finishing touch. A variety of decorative finishes allows you to design wood flooring to your own individual needs to give rooms that special edge and help you complete the new look.



## Eco Friendly

Tarkett is strongly committed to the environmental responsibility throughout all processes – from purchasing and using certified forest resources to producing and delivering eco-friendly products to the end consumers. Tarkett is devoted to promoting environmental excellence which can be trusted.



# FROM NATURE TO YOUR HOME

Every tree gives a variety of different colors and structures which vary depending on how we cut the material. Our 130-year-old experience in processing wood developed a unique system for carefully inspecting and grading wood, manufacturing floors with different looks, expressions and styles. This way, natural beauty becomes an everyday inspiration and part of your beautiful home.



Available wood species: Red Oak, Oak, Ash, Beech, Merbau, African Mahogany, Walnut.



## 1-strip



Performance Fashion, Tango Art, Tango and Tango Vintage collection

## 1-strip mini plank



Rumba, Tango Classic, and Step collection

## 3-strip



Salsa Art Vision, Salsa, Salsa Art, Salsa Premium, Samba and Bolero collection




# ENVIRONMENTAL commitment

Tarkett is strongly committed to the environmental responsibility throughout all processes – from purchasing and using certified forest resources to producing and delivering eco-friendly products to the end consumers.

We developed a strong sense of responsibility for the environment and therefore manufacture products in modern recycling society, without making compromises regarding product design and function. In our production, we reuse wood waste for making energy. Tarkett is devoted to promoting environmental excellence which can be trusted.

Our commitment to maintaining sustainable environment has been proved by several certificates.

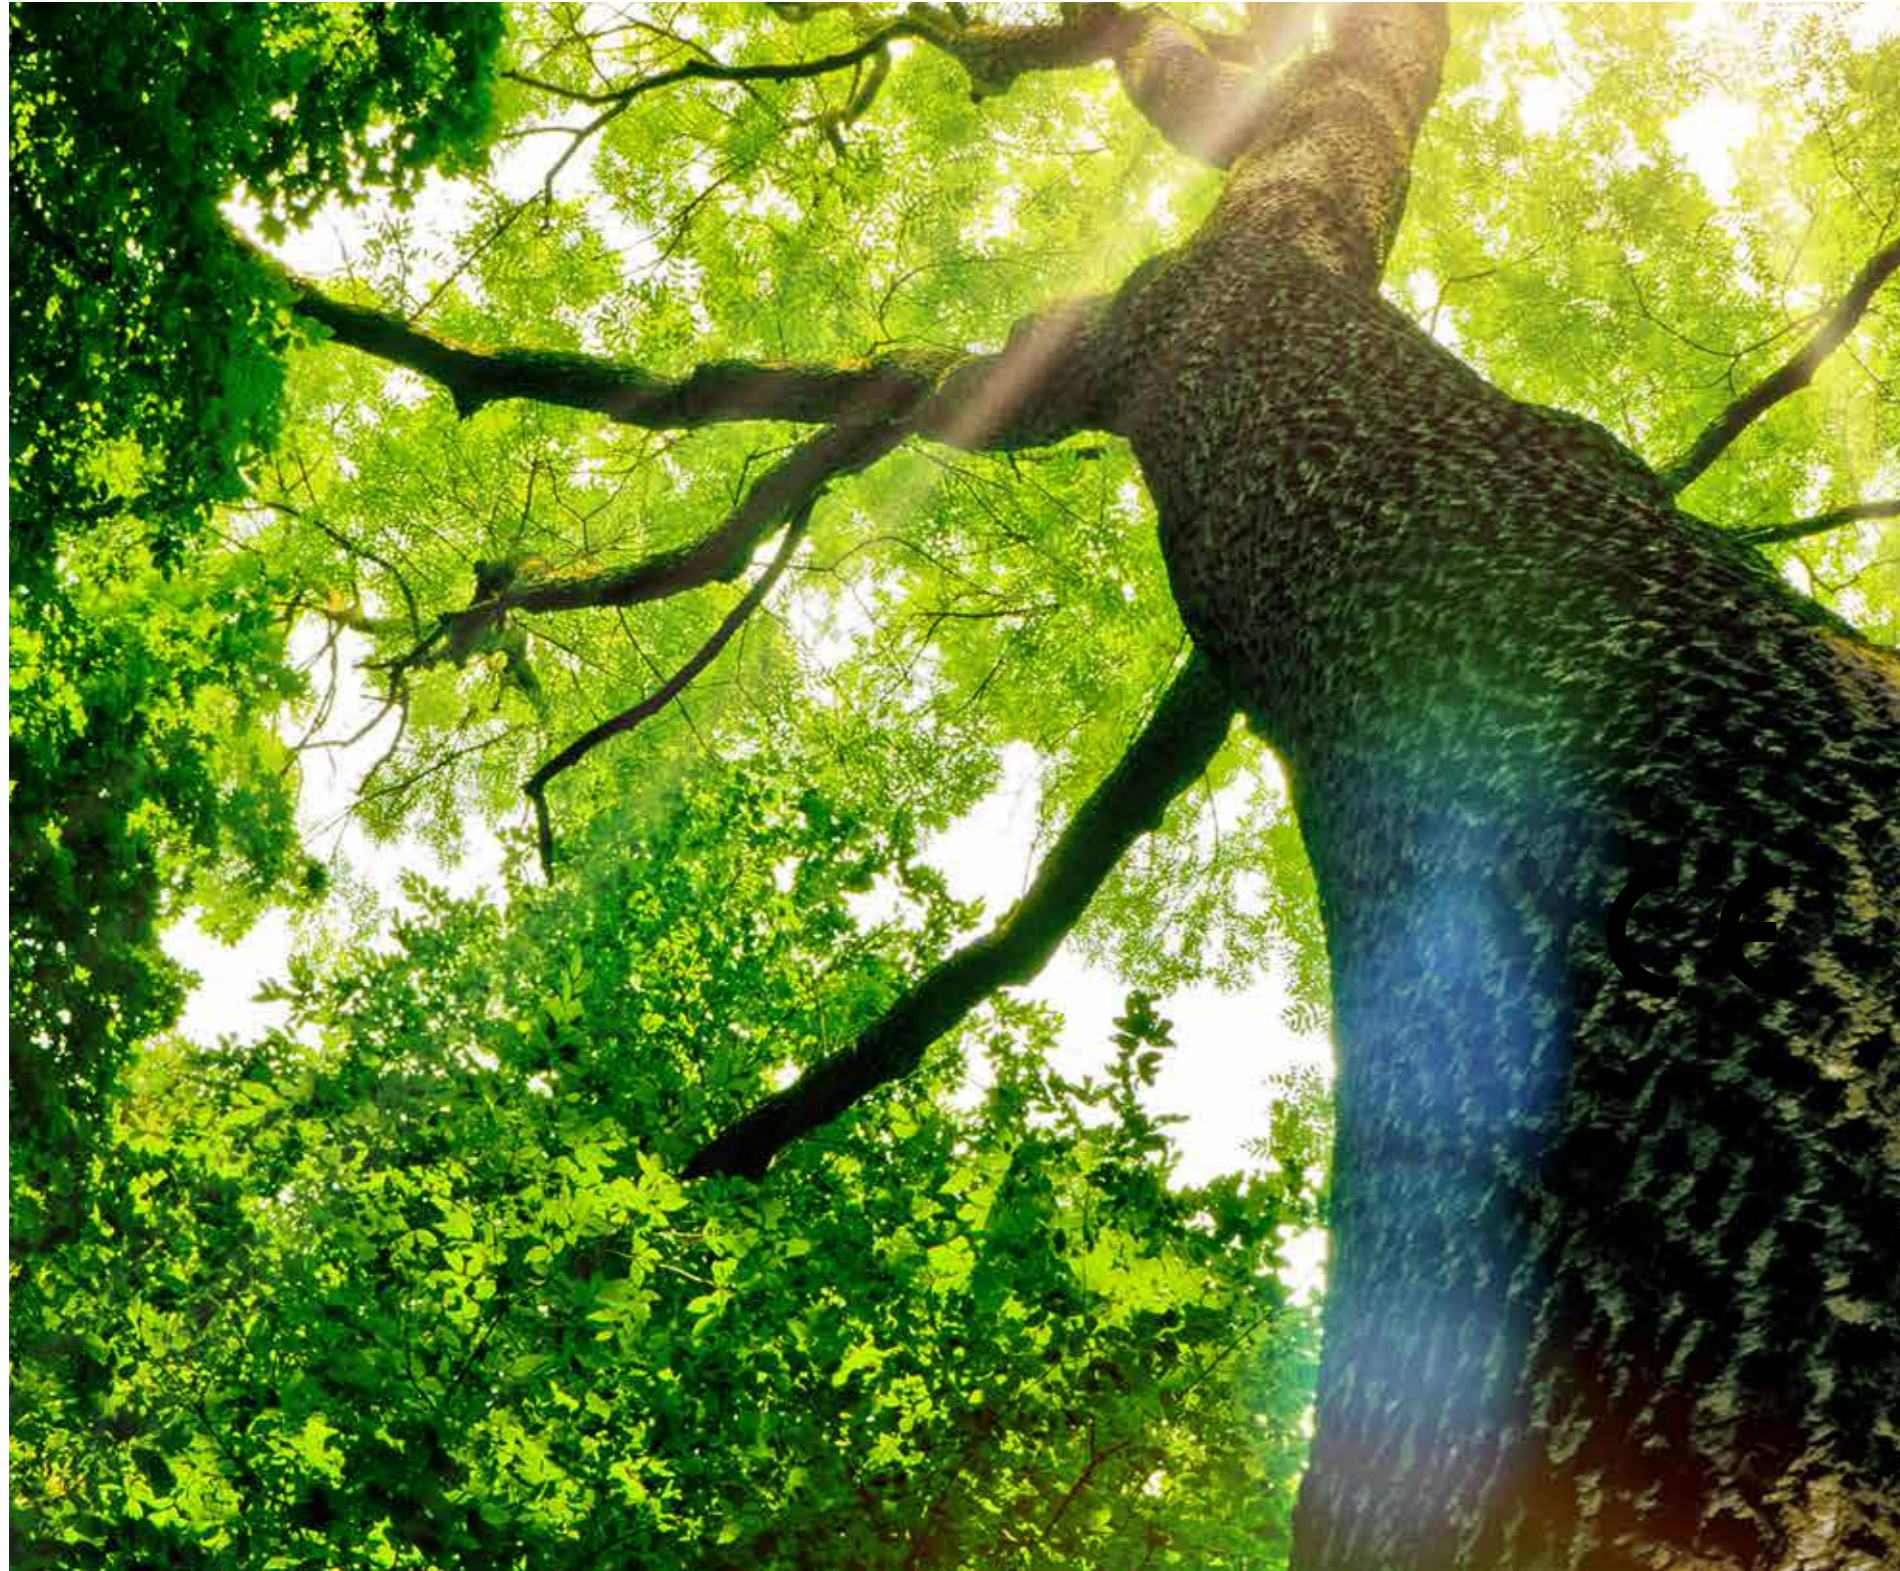

# sustainability

Long-term sustainability means making smart choices – getting the right balance between technical quality and performance, different ecological aspects and aesthetics, while considering expense. Tarkett is working towards sustainable development in cooperation with different organizations. Our wood flooring has been awarded with Silver level of Cradle-to-Cradle™ certification program, which evaluates environmental characteristics of a product throughout its life in circular economy. Our wood flooring factory is also FSCTM certified.



Ask about our FSC certified products.





# TARKETT WOOD FLOORING

## a natural choice

Wood is a wonderful, natural material which humans have used and trusted since the prehistoric times. Wood lives, breathes, and is unmistakable in its characteristics. When we are looking for something special, personal and authentic, natural wood can play a leading role. In its variety and liveliness, its scent, color and warm surface, wood provides a festival for the senses. Its variety is home to an enormous breadth of colors and shapes. Its structure and irregularities are part of this and make wood especially beautiful when worked right. In this way, the aura of natural wood lends a comfortable and warm ambience to every home.



### Social/Community Responsibility

Our floors provide safe, healthy environments where people can work, learn, play, heal and enjoy their leisure activities. Tarkett cares about people. Therefore, we organize a lot of activities that are devoted to Tarkett Fond functioning. With our wood flooring, people can enjoy everyday life so we can be sure that Tarkett brings happiness to every home.



### Indoor Environmental Quality

Our everyday focus is increasing effectiveness by reducing our consumption of resources and production of emissions, recycling and reusing materials and creating people-friendly places. It is simply a myth that wood flooring is linked to high levels of VOC emissions and the prevalence of mold growth.

### Tarkett Eco world

By manufacturing floors from the most diverse and exotic wood species from around the world, we make it possible to improve the quality of life in the local communities. With ISO 9001, 14001 and 18001, we have put the environmental and safety concerns in the scope of our activities and provided sustainable production performance through the management system.



### Real wood

The environmental benefits of choosing real wood are indisputable. Far less energy is consumed in timber production, processing and disposal than with any other construction material. And, after each wood harvest, the forests are replanted for the next generation.



### Eco-friendly wood flooring

We must produce environmentally friendly wood flooring products for our efforts to be meaningful to consumers. With Tarkett you can be assured that you are getting the finest wood flooring covering available. Being sustainable is an everyday practice, not just an idea.



### Recycling

We use more recycled content at the start of a product's life and recycle as much as possible at its end. We have the largest recycling operation in the industry and in 2008 we diverted over 68.000 tons of flooring from landfills to recycling. When it comes to recycling, being more responsible is a philosophy that we are following and not just a simple idea.



### Energy

Energy use is a primary environmental concern in modern world as well as a significant financial issue. Tarkett has developed a number of innovative energy-saving processes that reduce fuel and electricity use. What we take from nature, with your help, we give back to people who live there – we carefully afforest in order to preserve healthy future for all of us.



### Water


Tarkett has always been a good steward of our communities' water supplies and those supplies have traditionally been plentiful. Recently, however, many areas in which we operate in the Southeast have experienced drought conditions that made this topic a more critical issue. We've found innovative ways to become great stewards.





# TARKETT WOOD flooring guide

- Not everybody comes into store knowing exactly what style of wood flooring he or she wants. There are some specifics that can eventually help you find the floor that's going to transform your home; for example, the color, texture or plank width. With Tarkett's large, unique variety of wood flooring be confident that no matter what you are searching for, your perfect floor will await in the end.
- Whether building a new home or tackling a remodeling project, you can be confident that Tarkett genuine wood flooring will add significantly to the beauty, quality and value of your home. It's a smart investment that you will be able to enjoy for a lifetime.

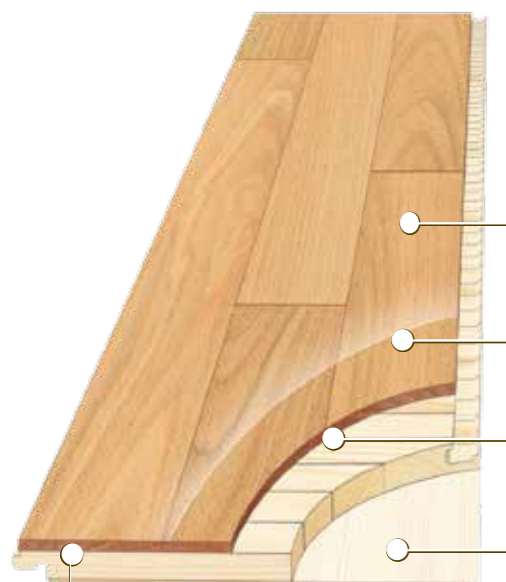

**Mechanical locking system T-lock**  
- enables fast and easy installation.



## Multilayer parquet construction

Tarkett's wood floorings are made from wood parts with more stable bonds. Special construction and bonding method give them superior durability and structural stability. These characteristics make them appropriate for installation in every available room including basements.

**Surface protection** - Tarkett's hard wearing high gloss, shiny or matt lacquer (Proteco Strong) or Proteco Strong Hardwax Oil.

**Top layer** - made of hard wood in a variety of species and designs including staining and heat treatment.

**Middle layer** - strong and supportive middle layer of transverse wood with fibers that contributes to the stability of the boards.

**Balancing layer** - this layer stabilizes the board and guarantees dimensional stability.



## Grading of wood

In our manufacturing, the wood is sorted and graded in different families to get specific image of the flooring. At Tarkett, we offer different wood grading:

- Select - very soft and smooth
- Premium - uniform wood with minor variations
- Nature - the traditional grading
- Rustic - lively with knots
- Robust - lively with less knots but more color variations

Our century long experience, commitment to excellence and care for consumers guide us in eliminating natural wood imperfections - knot holes, bird pecks, worm holes, black spots and other cracks.

The European norm EN 13489 defines the criteria that must be fulfilled for a floor to be classified as "Multilayer parquet".



## Choose color - for the best atmosphere and mood

Many available colors are the result of the natural color and graining of the wood species and the stain applied to the wood. Your home's lighting will also play a role, so ask the retailer for samples and compare the wood color with the overall decor of your home.

## Finest characteristics and specific styles

Wood species differ in appearance, durability and hardness. Traditional Oak species are famous for their hardness and durability, variations in grain and shade that add character. There is also an exotic species available - African Mahogany - that takes its distinctiveness from a combination of origin, color and surface characteristics. The hardness of wood is measured by the Brinell test - an industry standard test that reflects the surface's tolerance to pressure. The higher the score on the scale, the harder the floor.

## Impression which suits the taste and purpose

Wood flooring is commonly described by board's top layer: as strips and planks. The width of individual boards will have a dramatic influence on the final look of the floor. Select the look you like best - Salsa, Salsa Art and Salsa Art Vision (3-strip): 2283x194x14 mm; Samba and Bolero (3-strip): 1123x194x14 mm; Tango, Tango Art and Performance Fashion (1-strip): 2215x164x14 mm; Tango Vintage (1-strip): 2215x164x14 mm; Tango Classic (1-strip mini plank): 1200x164x14 mm; Step (1-strip mini plank): 140/164x1000/1200x14 mm or Rumba (1-strip mini plank): 1200x120x14 mm.

## Stylish details that give the special look

The way the edges and ends of boards are cut is called edge detail or bevel. If you are looking for high contrast dramatic effect, you can choose between mini or maxi bevels in Tango and Tango Art collection. Square edges (Salsa - square edges) archive a low contrast effort effect by creating a more calm appearance. You can choose between mini, midi, maxi, hand bevel or four side bevel.



Shiny / Matt / High gloss



## Gloss for every taste

Your choice of high gloss or low gloss is a matter of personal preference. Whether you opt for matt, shiny or high gloss surface, you can be sure to have bought the most wear resistant finish with the best micro scratch resistance on the market. Thanks to the properties of Proteco Strong, stains and marks are easy to remove and your floor will look fresh for a very long time.

Proteco Hardwax Oil gives the best surface protection using oil thanks to the Hardwax component that stays on the surface improving wear and micro scratch resistance. By adding hard wax to the oil a protective surface is achieved, which provides better protection against wear in the surface layer.



## Magnificent wood in many different ways

Whether your taste is rustic, traditional or contemporary, we offer a wide variety of styles and surface textures to meet your needs. Before making your final selection, explore - from smooth and plain to rustic and brushed surface.



## Surface effects

We have selected top quality natural resources and the most advanced production techniques in order to produce the unique wood flooring with exquisite surface effects such as hand scrape, saw mark and distress.



## Aqua guard protection

Tarkett developed special hydrophobic liquid and State of Art applying equipment to protect the most sensitive part of installed wood flooring - short connections between boards. Hydrophobic liquid extends short side boards protection from most common water based liquid spills (water, tea, milk, coffee, wine, juices).



## Digital print technology

By using specially developed equipment for digital printing on real wood, Tarkett enhances natural wood beauty with unique and modern designs. Thanks to the innovative color application method and possibilities of changing colors and nuances combined with the individual grain of each board, Tarkett proudly offers a wide variety of exceptional wood flooring designs. With digital printing technology, over 125 years old tradition of creating quality wood flooring and the most modern production technology are being brought together. Tarkett sets a whole new trend in decorating interiors, where wood flooring becomes part of your image and provides you with an opportunity to make your designing wishes come true. Tarkett's wood flooring has never been so perfect.

## SUPERIOR QUALITY and lasting beauty

Why are Tarkett multilayer wood floors better than my solid floors?

- Extremely easy and fast floor installation
- Perfect look without gaps between boards
- Our wood floorings are already treated with resistible UV lacquer which contains no harmful materials
- Following customer's needs, our floors can be re-sanded and lacquered several times during their use
- Superior wood floor quality has a unique 30 years warranty



## The ultimate SURFACE PROTECTION

Safe, Resistant, Reliable wood flooring. With its superb craftsmanship, exceptional quality and innovative design, Tarkett wood flooring will enrich your living space and ensure long life expectation.

- Aqua Guard test is used to determine the lacquer condition and flooring visual aspect 3h after spilling water on the short side of board connection.
- Bacteria test is used to measure the number of bacteria cells 24h after incubation on the treated wood flooring sample.
- Impact test measures the highest point from which a steel ball will be thrown without creating lacquer cracks on the edge of impressed spot.
- Taber test represents one of the most important tests in wood flooring industry and it simulates lacquer wear and tear during the time of usage.
- Micro scratch test uses abrasive sponge and measures gloss differences in number of passes over the predefined lacquered surface area.

The Ultimate Surface Protection refers to: Performance Fashion, Tango, Tango Art, Step, Rumba, Salsa Art Vision, Salsa Art and Salsa collection.





## OBJECT IMPACT

### – lacquer elasticity

What if you drop some round object on your wood flooring? Just relax, Tarkett Proteco Strong lacquer elasticity and stability prevent lacquer cracking on impacted areas.

- Superior lacquer elasticity and stability
- Prevents lacquer from damaging and cracking
- Precludes dirt and water from penetrating the impact area and darkening the finish



2X BETTER IMPACT TEST RESULTS THAN MAIN COMPETITOR  
\*Blue indicator shows lacquer cracking on impacted area

## AQUA GUARD – liquid resistance

What if you spill some water-based liquids on your wood flooring? No problem, Tarkett has developed special hydrophobic liquid and State of Art applying equipment to protect the most sensitive part of installed wood flooring – short connections between boards.



3 HOURS AFTER WATER SPILL, THE TARKETT SAMPLE IS PROTECTED



## TABER ABRASION – lacquer durability

What if you plan to use wood flooring for a very long period of years? Be sure that Tarkett Proteco Strong lacquer exceptional abrasion resistance and outstanding durability will secure your long life expectations.

- The strongest wear and tear resistance
- Ensures product's long life expectations
- Makes the surface look new and fresh for a very long time



3X BETTER TABER ABRASION TEST RESULTS THAN MAIN COMPETITOR  
\*Blue indicator shows low abrasion resistance on sanded area

- Protects wood flooring from most common water-based liquid spills
- Extends liquid resistance at the short side of boards connection
- Provides better wood flooring overall appearance

## BACTERIA STOP – prevents reproduction

What if there are some bacteria on your wood flooring? Don't worry, Proteco Strong lacquer bacteria stop properties prevent bacteria reproduction and keep you and your family safe and healthy.

- Bacteria stop lacquer properties
- Prevents bacteria reproduction
- Keeps you and your family safe and healthy for a long-lasting period of time



24 HOURS AFTER BACTERIA INCUBATION  
A TOTAL NUMBER OF BACTERIA IS SIGNIFICANTLY REDUCED

## MICRO SCRATCH – gloss stability

What if you use some areas of wood flooring more frequently? Tarkett Proteco Strong advanced micro scratch resistance minimizes the lacquer gloss variation over time and preserves wood flooring's original appearance.

- Advanced lacquer micro scratch resistance
- Minimizes gloss variation during years of usage
- Preserves wood flooring's original appearance over time



20% BETTER MICRO SCRATCH TEST RESULTS THAN MAIN COMPETITOR  
\*After 150 passes of abrasive sponge





# TARKETT REFERENCES

## SUN CITY

CATEGORY  
Residential building

COUNTRY  
Serbia, Belgrade

INSTALLATION YEAR  
2017

TARKETT SOLUTION  
Rumba, Oak Savanna

AREA  
9.000 m<sup>2</sup>







# TARKETT REFERENCES



## CITY QUART

CATEGORY  
Residential building

COUNTRY  
Montenegro, Podgorica

INSTALLATION YEAR  
2010 - 2016

TARKETT SOLUTION  
Salsa, Oak Nature BR

AREA  
43.800 m<sup>2</sup>





# TARKETT REFERENCES



## VIP CASA


CATEGORY  
Apartments

COUNTRY  
Serbia, Zlatibor

INSTALLATION YEAR  
2015 /2016

TARKETT SOLUTION  
Rumba, Oak Snow

AREA  
1.500 m<sup>2</sup>

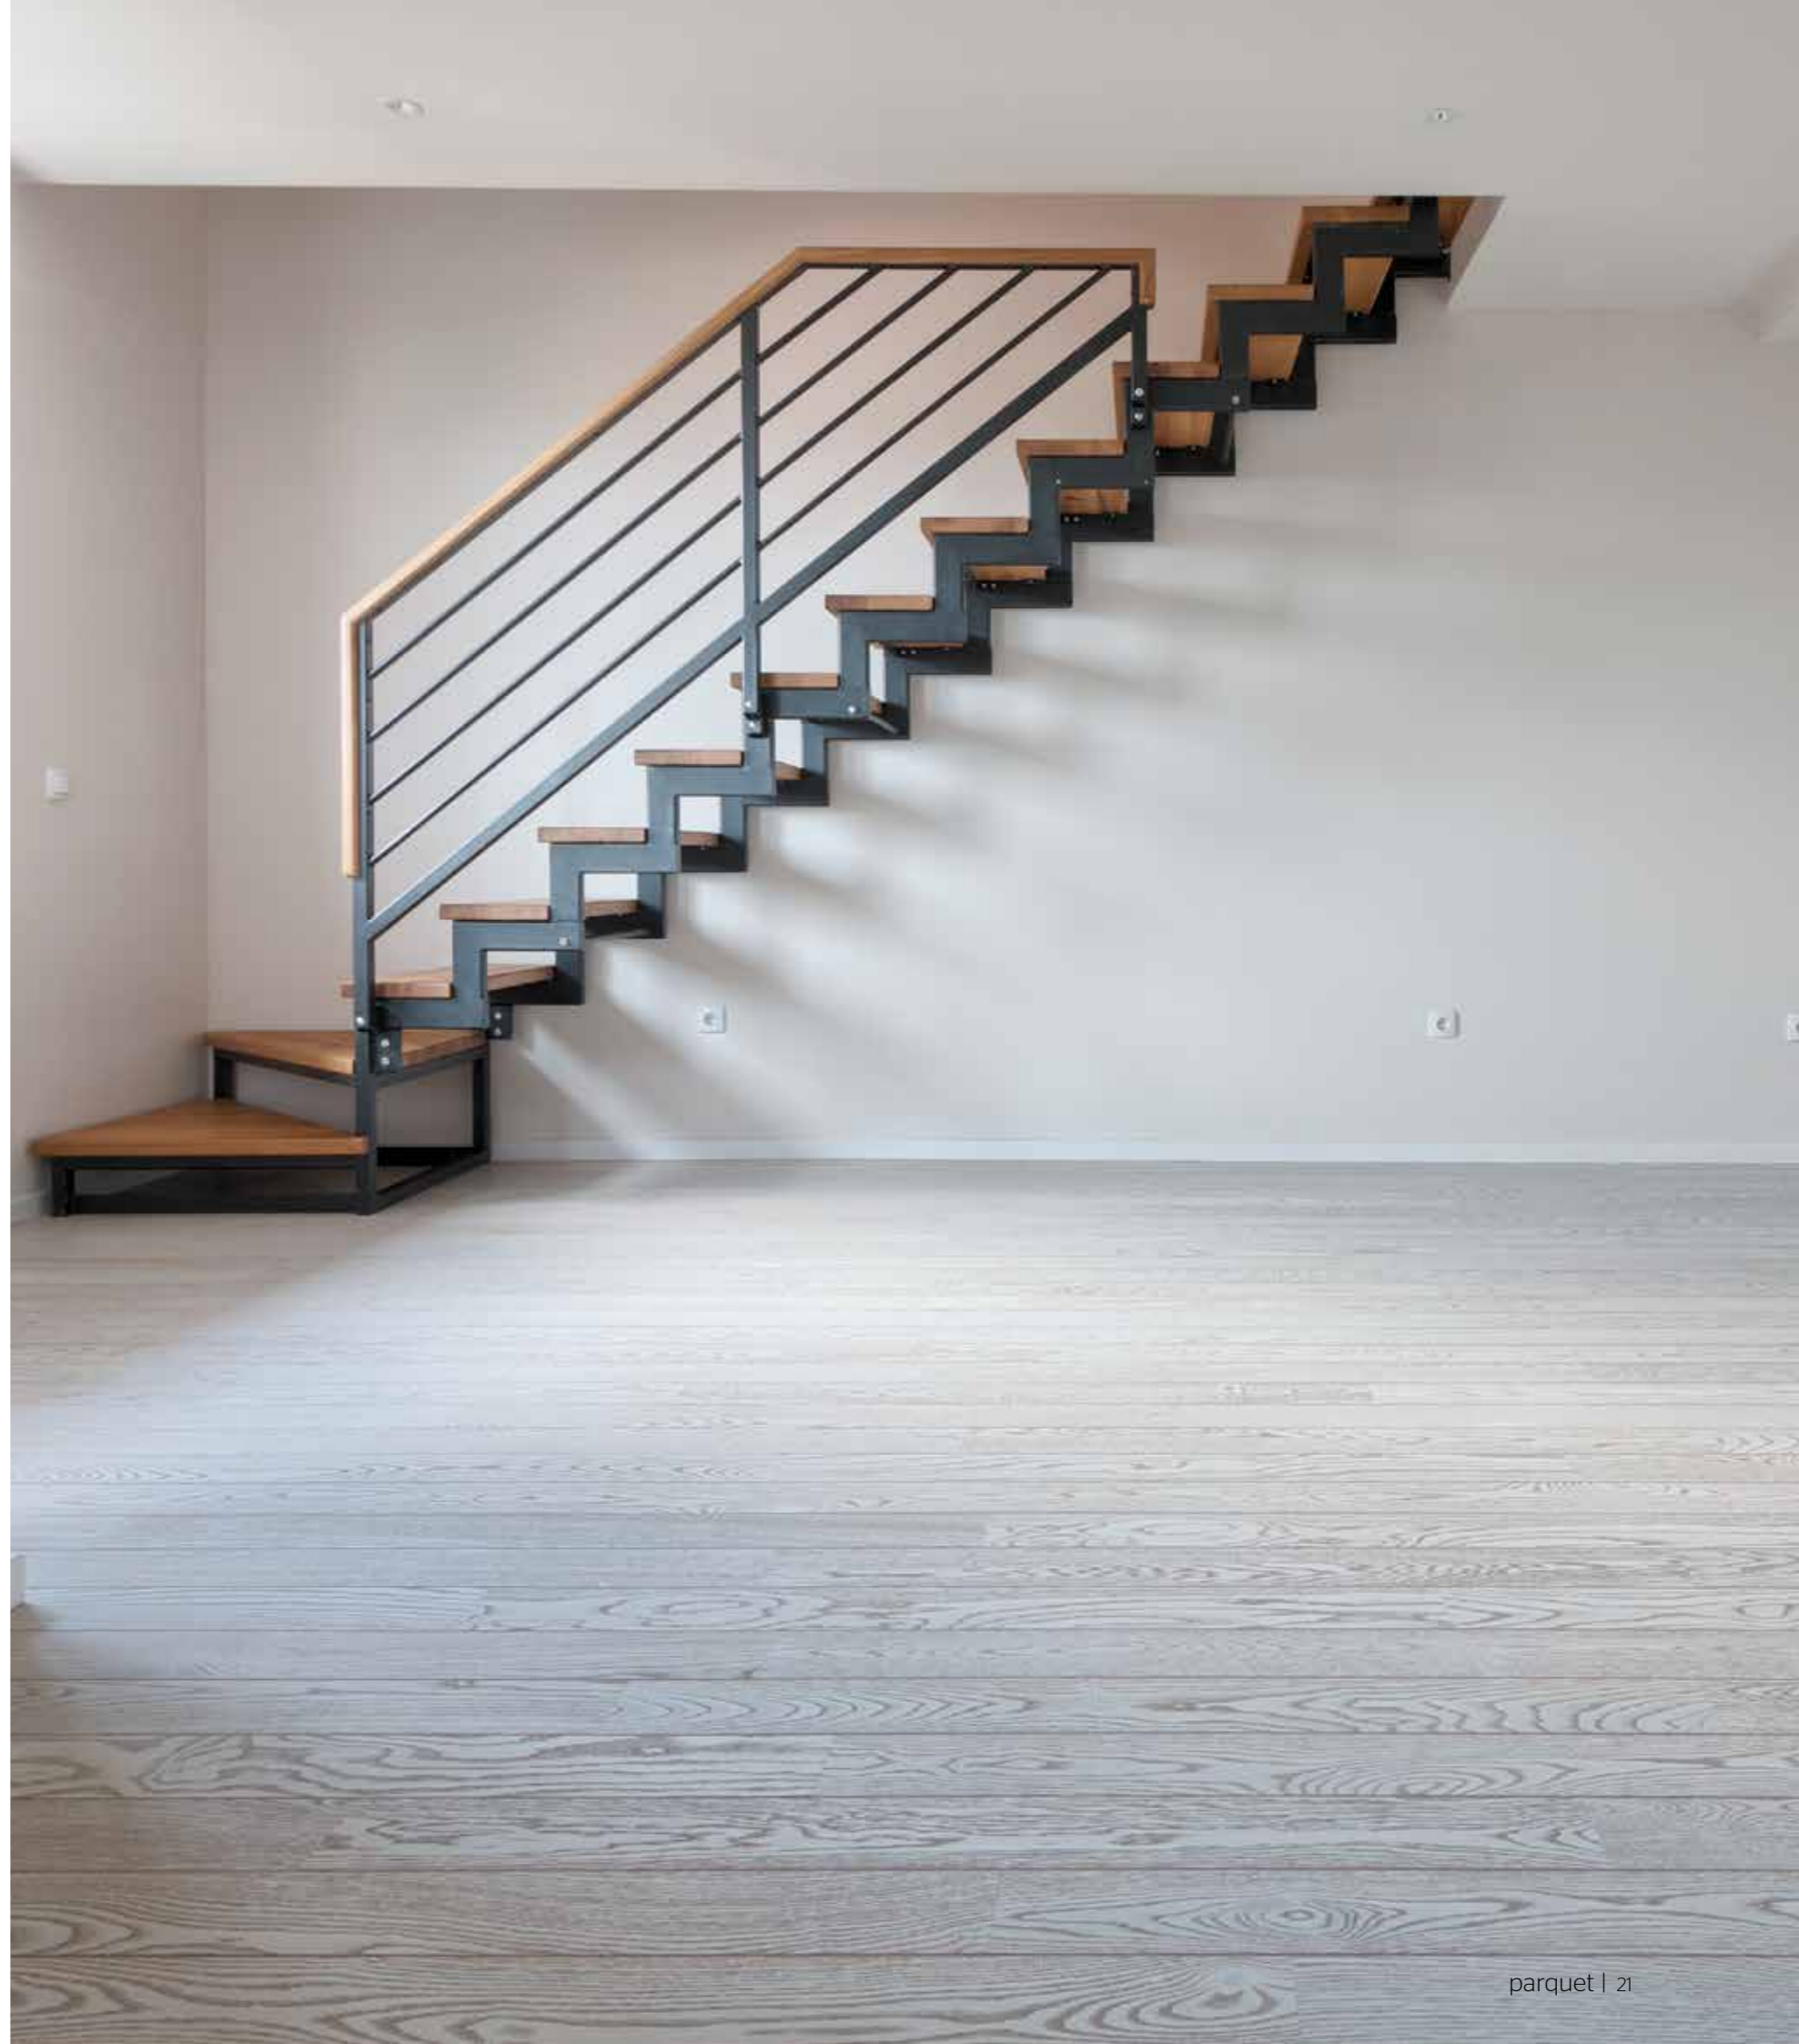



# TARKETT REFERENCES



## VOŽDOVAC

CATEGORY  
Residential building

COUNTRY  
Serbia, Belgrade

INSTALLATION YEAR  
2015

TARKETT SOLUTION  
Salsa, Oak Sahara

AREA  
850 m<sup>2</sup>





# TARKETT REFERENCES

**ZETA GRADNJA  
CITY QUART 2**

**CATEGORY**  
Residential building

**COUNTRY**  
Montenegro, Podgorica

**INSTALLATION YEAR**  
2013-2016

**TARKETT SOLUTION**  
Salsa, Oak Nordic HG  
Rumba, Oak Canyon HG

**AREA**  
26.800 m<sup>2</sup>





# TARKETT REFERENCES



## MORINJ

CATEGORY  
Apartments

COUNTRY  
Montenegro, Morinj

INSTALLATION YEAR  
2016

TARKETT SOLUTION  
Rumba, Oak Snow

AREA  
750 m<sup>2</sup>





# our wood species

oak

red oak



ash

merbau

african mahogany

beech

walnut



## Lasting beauty

**Oak (*Quercus robur*)** is perhaps the most popular wood for floors and furniture. Beautiful, dignified and hard, Oak has the ideal qualities for a flooring material. Oak offers a variety of temperaments depending on which part of the tree is used and how the floor is made. The options range from calm, dignified planks in a single shade to lively combinations with an attractive variety of lighter and darker strips.

## Interesting moments

**Red Oak (*Quercus rubra*)** is one of the largest and most important timber trees. Red Oaks are broadly distributed across the United States and southeastern Canada. The trees can grow to 45 m and over 1.2m in diameter. The sapwood is nearly white and usually 2.5 cm to 5 cm thick; the heartwood is brown with a tinge of red or pink. Red Oak is preferred in all turning and flooring applications, it finishes and stains easily. Red Oak has a great commercial significance.

## For a friendly atmosphere

**Ash (*Fraxinus excelsior*)** is one of the noble broadleaf trees which emerged during the warm period 8,000 years ago. Its wood is tough, hard and durable - ideal as a flooring material. Ash floors have a light, warm color with a lively brown grain, creating vibrant rooms with a friendly atmosphere. Ash also responds exceptionally well to the heat treatment, acquiring a rich, dark shade with a lovely grain. You can also choose between different lacquers, and between a brushed or stained surface finish.

## Luxurious touch

**Merbau (*Intsia bijuga*)** has tropical, refined look which contributes to ascendancy in every elegant ambient. Merbau can be found in Asia (Indonesia, the Philippines) which explains its dark and exotic appearance, with natural variations in warm red. Merbau gives toughness and persistence to parquet with its descent and a luxurious pattern. Merbau grows in tropical conditions and naturally it consists of yellow and white stains. It's an extremely tough and sustainable wood species.

## Shining elegance

**African Mahogany (*Sapele*)** has a flexible, thick and rough grain with reddish brown color that darkens over time and possesses a beautiful reddish shine when polished. Graining is relatively free of voids and pockets. Sapwood is not always clearly distinguishable from heartwood, both being initially pale pink to red brown, but darken to a rich reddish brown upon exposure. Mahogany's texture is variable, but typically medium to coarse with an excellent finish.

## Warming touch


**Beech (*Fagus sylvatica*)** can live up to 400 years, and is the tree that thrives best in the shade. Anyone who's ever strolled around a Beech forest knows what a wonderful experience this is. Part of this feeling is captured in a Beech floor. Beech wood's attractive grain and pleasant color give the floor elegance and class. What's more, Beech wood is hard and durable, and ages gracefully.

## Eternal energy

**Walnut (*Genus Juglans*)** is an eternal symbol for fertility. This wood species is known since the antique times and its origins are in North America (USA, Canada) and Europe (The Balkans). Exclusive furniture, music instruments and various sculptures were often made from this unique species. Walnut, with its dark color and beautiful stylish pattern, can be found in different types, but every type is redolent of a typical mix of conciliation and energy.



# TARKETT WOOD ranges

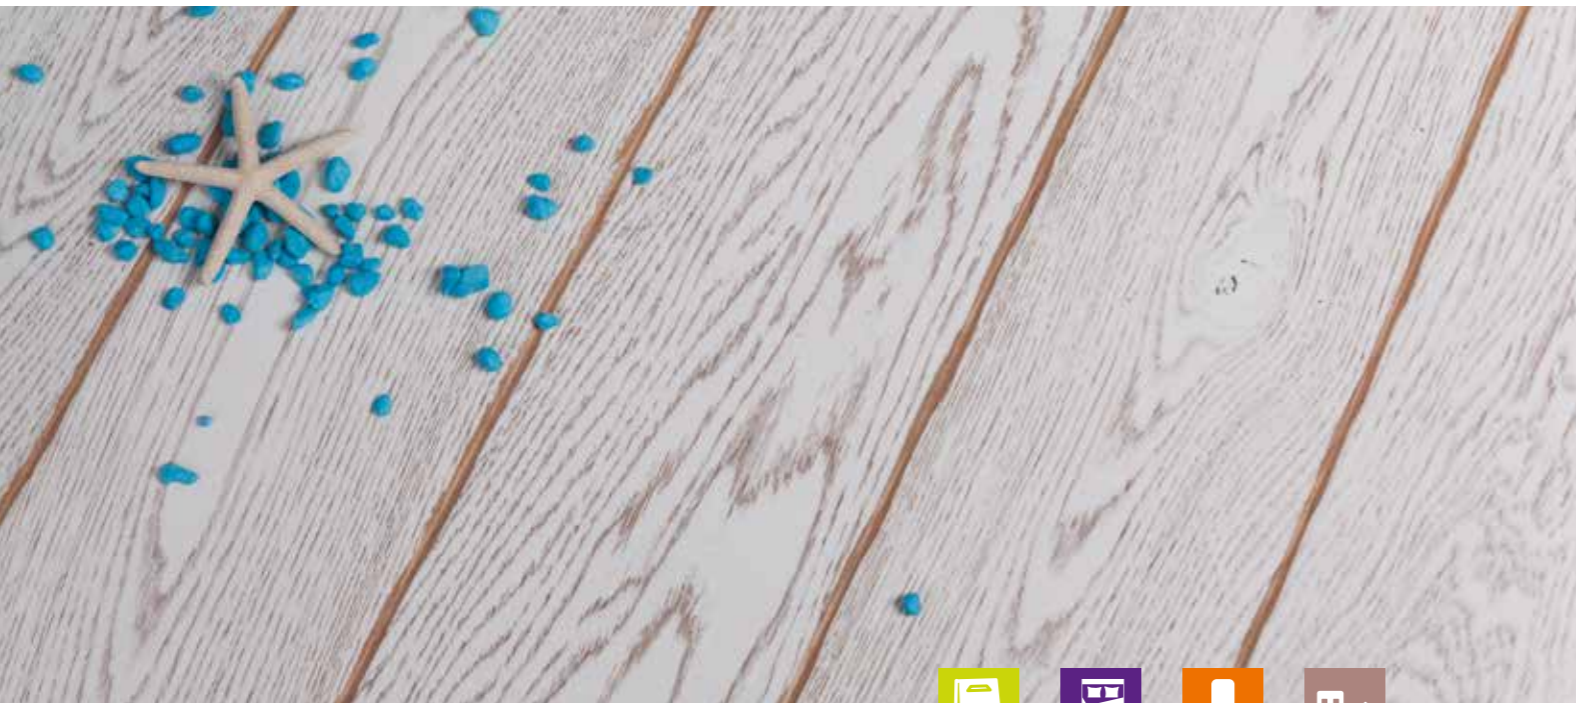

Crafted designed wood floorings using the best materials available for homes, shops, hotels, restaurants and offices

## SENSORIAL BENEFITS


- Exclusive oak planks from special selections of wood
- Natural wood designs enhanced by crafted elements
- Exclusive extra wide planks for luxury applications
- A range built on emotions for the natural feeling of real wood
- Extensive range of accessories to support installation, care & maintenance and accessories like smart skirting boards, moldings and pipe covers in different wood species to complete the final touch of wood flooring

## FUNCTIONAL BENEFITS

- Very stable multi-layer construction that minimizes movement in changing indoor humidity conditions
- Proteco – one of the strongest surface protections available – provided in Matt Lacquer and in Hardwax Oil

## ENVIRONMENTAL BENEFITS

- High durability, good acoustics, excellent thermal stability and long life expectancy.
- Very low VOC emission values for good indoor air quality
- Suitable for self-regulating under floor heating systems (max 25 °C)
- Easy to care & maintain without using aggressive detergents

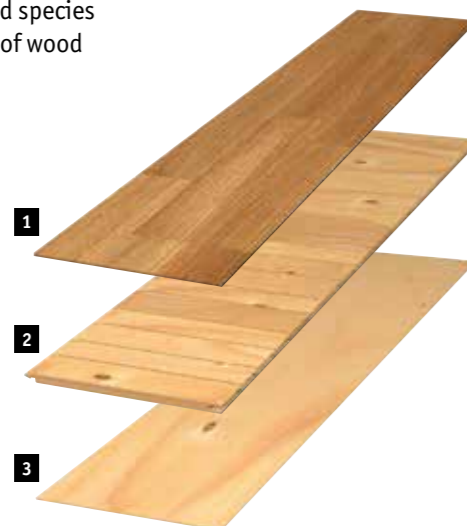

## multilayer wood solutions

- 1 Wear layer of real wood
- 2 Strong and supportive middle layer with transverse wood fibers of pine and spruce
- 3 Stabilizing bottom layer

TECHNICAL DATA	Performance Fashion	Tango Vintage	Tango Art	Tango Art	Tango Classic	Step L & XL
Total thickness	14 mm					
Width	164 mm	164 mm	164 mm	164 mm	164 mm	140 / 164 mm
Length	2215 mm	2215 mm	2215 mm	2215 mm	1200 mm	1000 / 1200 mm
Wear layer thickness	app. 3,6 mm	app. 3,6 mm	app. 3,6 mm	app. 3,6 mm	app. 2,8 mm	app.2,8 mm
Weight	app. 7,2±10%	app. 7,2±10%	app. 7,3±10%	app. 7,5±10%	app. 6,7±10%	app. 7,36/7,53±10%
Boards in 1 Pack	6	6	6	6	6	6
Sqm 1 Pack	2.18	2.18	2.18	2.18	1.182	0,840/0,984 / 1,008 / 1,182 m2

TECHNICAL DATA	Rumba	Salsa Art Vision	Salsa Art	Salsa Premium	Salsa	Bolero	Samba
Total thickness	14 mm						
Width	120 mm	194 mm	194 mm	194 mm	194 mm	194 mm	194 mm
Length	1200 mm	2283 mm	2283 mm	2283 mm	2283 mm	1123 mm	1123 mm
Wear layer thickness	app. 3,6 mm	app. 3,6 mm	app. 3,6 mm	app. 3,6 mm	app. 3,6 mm	app. 3,6 mm	app. 3,6 mm
Weight	app. 7,4±10%	app. 7,3±10%	app. 7,3±10%	app. 7,2±10%	app. 7,3±10%	app. 7,8±10%	app. 7,8±10%
Boards in 1 Pack	6	6	6	6	6	6	6
qm 1 Pack	0.864	2.658	2.658	2.658	2.658	1,307	1.307

standards ISO 24346 (EN 428)

## General Information





# PERFORMANCE FASHION collection



Coco Shine



For ages the world was flat and confined, bounded by strict lines and tied by obligatory laws. And only fashion is able to tint the dull daily routine of our ambience, shifting its shapes, colors and moods.

Mix of styles has become a new trend. Infinite possibilities of digital images stepped out of the paper plane and a classic wood floor was enhanced by millions of undertones and designs. Everything for You, to find that very pattern which will ideally reflects your aspiration.

Digital Print on a wood boards – best of nature and technologies, embodied in the interior of Your dream.

Performance series is a dedication to the most talented and unordinary personalities. Incredible, creative, inspiring. Exceptional. To those who create, whose style is copied by followers, whose world vision becomes a trend.

Performance by Tarkett exhibits the incredible technologies from a world leader, a mix of high-precision digital printing with a warm natural structure of noble wood. These are the designs that will reveal your "creative ideas in a brand new dimension!"

TECHNICAL DATA	STANDARDS	Performance Fashion
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	164 mm
Length	-	2215 mm
Wear layer thickness	-	app. 3,6 mm

## surface treatment



## logistics information

dimensions (mm)	164X2215 mm	m <sup>2</sup> /box	2.18
locking system	T-Lock	m <sup>2</sup> /pallet	130,8
planks/box	6		



1-strip



Product code: 550169017

GIANNI STYLE

Product code: 550169015

GIANNI BOHO

Product code: 550169016

GIANNI ECCENTRIC

Product code: 550169011

VIVIENNE NEW LOOK

Product code: 550169009

VIVIENNE ECCENTRIC



Product code: 550169010

VIVIENNE GRUNGE

Product code: 550169006

COCO SHINE

Product code: 550169007

COCO ELEGANCE

Product code: 550169008

COCO BOHO

Product code: 550169013

NINA ELEGANCE



Product code: 550169012

NINA BLACK OUT

Product code: 550169014

NINA NEW LOOK

Product code: 550169005

SALVATORE ECCENTRIC

Product code: 550169003

SALVATORE GRUNGE

Product code: 550169004

SALVATORE SHINE



Product code: 550169001

SALVATORE STYLE

Product code: 550169020

LOUIS ECCENTRIC



Product code: 550169018

LOUIS NEW LOOK

Product code: 550169019

LOUIS ELEGANCE



Product code: 550169021

PACO NEW LOOK

## warranty



## general information





# TANGO VINTAGE collection



Rioja



TECHNICAL DATA	STANDARDS	Tango Vintage
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	164 mm
Length	-	2215 mm
Wear layer thickness	-	app. 3,6 mm

Tango Vintage is oiled wood flooring which gives you a wide range of unique designs and special effects. Each design of this collection is one of a kind piece of beauty, but also a mix of tradition built for centuries and contemporary colors and textures.

Remarkably versatile and inevitably high quality Tango Vintage oiled wood flooring is a smart investment that you will enjoy for a lifetime. Hardwearing, easy to clean, and scratch resistant, over the years the appearance will develop a unique look that reflects your life style.

surface treatment



logistics information

dimensions (mm)	164x2215 mm	m <sup>2</sup> /box	2.18
locking system	T-Lock	m <sup>2</sup> /pallet	130,8
planks/box	6		




1-strip

warranty




general information





# TANGO ART collection

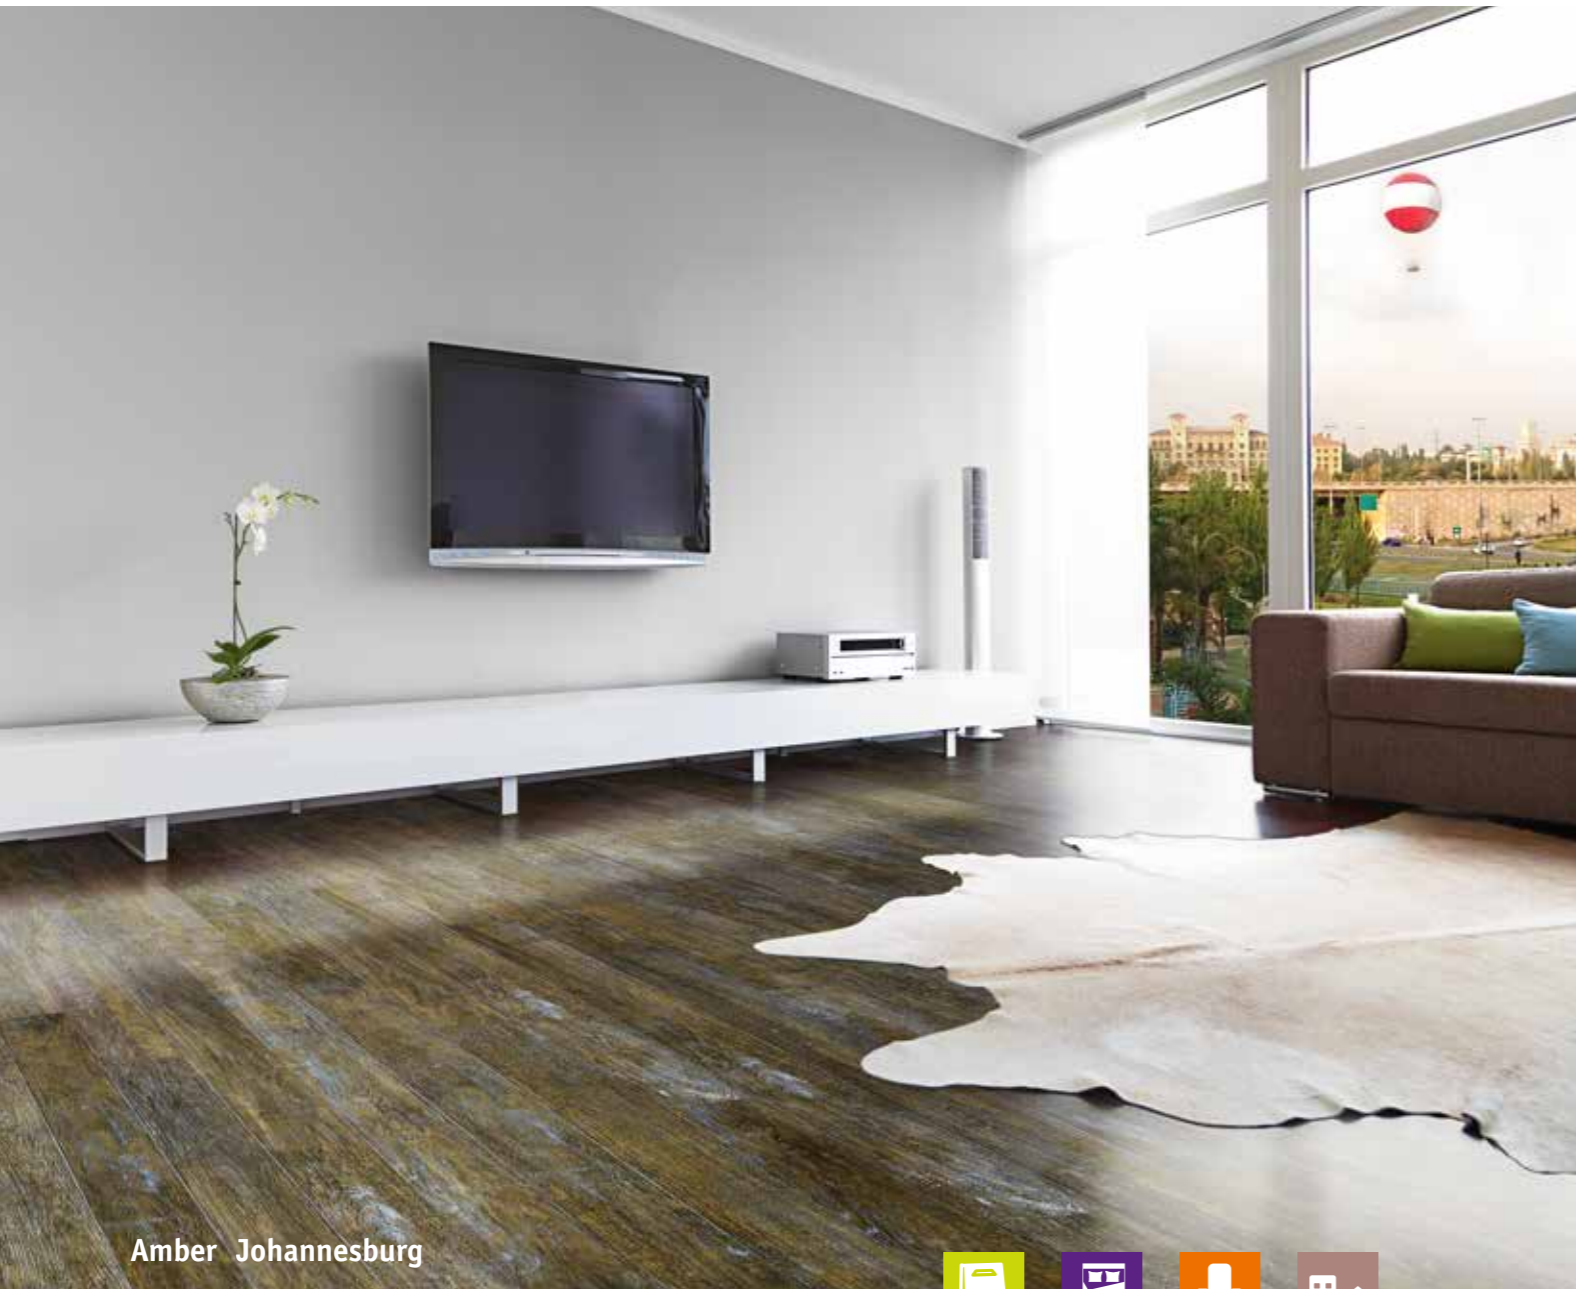

Amber Johannesburg



WHITE MOSCOW

Product code: 550059008



VIOLET TOKYO

Product code: 550059005



PEARL DUBAI

Product code: 550059001



BEIGE LISBON

Product code: 550059013




GREY ROME

Product code: 550059010



CREAM NEW YORK

Product code: 550059003



BROWN BARCELONA

Product code: 550059002



AMBER JOHANNESBURG

Product code: 550059012

TECHNICAL DATA	STANDARDS	Tango ART
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	164 mm
Length	-	2215 mm
Wear layer thickness	-	app. 3,6 mm

Tango Art collection provides you with unique designs that bring emotions from journeys through beautiful cities all over the world. Using the inspiration that we took from nature, we created the artistic and rich designs from Tango Art. Feel the rhythm of dancing.

surface treatment



logistics information

dimensions (mm)	164x2215 mm	m <sup>2</sup> /box	2.18
locking system	T-Lock	m <sup>2</sup> /pallet	130,8
planks/box	6		



1-strip

warranty



general information





# TANGO collection



Oak Seashell BR




OAK AMARYLLIS

Product code: 550058031




OAK SCANDINAVIAN

Product code: 550058015




OAK NATURE

Product code: 550058014



OAK SEASHELL BR

Product code: 550058013




OAK ANTIQUE BR

Product code: 550058018




OAK SCHWARZWALD

Product code: 550058029




AFRICAN MAHOGANY

Product code: 550058002



OAK CUMIN BR

Product code: 550058017



ASH COGNAC

Product code: 550058005



ASH COGNAC BR

Product code: 550058004



OAK JAVA BR

Product code: 550058024

TECHNICAL DATA	STANDARDS	Tango
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	164 mm
Length	-	2215 mm
Wear layer thickness	-	app. 3,6 mm

Tango collection brings you the finest one-piece wood planks found in nature, designed and crafted exclusively for you. Tasteful edge details and rich texture will guide you to delightful flights of fancy, discovering a whole new meaning of style.

surface treatment



logistics information

dimensions (mm)	164x2215 mm	m <sup>2</sup> /box	2.18
locking system	T-Lock	m <sup>2</sup> /pallet	130,8
planks/box	6		




1-strip

warranty



general information





# TANGO CLASSIC collection



ASH ALABASTER

Product code: 550182001



OAK BRIGHT

Product code: 550182002



OAK SEPTIA

Product code: 550182003




OAK DISTINCT

Product code: 550182004



OAK COPPER

Product code: 550182005



OAK SIENNA

Product code: 550182006

TECHNICAL DATA	STANDARDS	Tango Classic
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	164 mm
Length	-	1200 mm
Wear layer thickness	-	app. 2,8 mm

Classics never go out of fashion. With the idea of designing beauty and quality that passes the test of time and makes home warm and comfortable, we designed Classic. Tango Classic.

It is a selection of our most popular and proven designs in essential colour palette, now with Osmo Hardwax Oil finish. Oil accentuates natural wood tones and its texture, while elegant four side bevels underline sophistication and timeless style of all six carefully chosen designs in Tango Classic.

surface treatment



logistics information

dimensions (mm)	164x1200 mm	m <sup>2</sup> /box	1.182
locking system	T-Lock	m <sup>2</sup> /pallet	70,92
planks/box	6		



1-strip mini plank

warranty



general information





# STEP L&XL collection



Oak Baron Brown



OAK ROYAL AZURE

Product code  
XL 1200: 550184001  
L 1200: 550184002  
XL 1000: 550184003  
L 1000: 550184004



OAK ROYAL ANTIQUE WHITE

Product code  
XL 1200: 550184005  
L 1200: 550184006  
XL 1000: 550184007  
L 1000: 550184008



OAK ROYAL

Product code  
XL 1200: 550184009  
L 1200: 550184010  
XL 1000: 550184011  
L 1000: 550184012



OAK BARON

Product code  
XL 1200: 550184013  
L 1200: 550184014  
XL 1000: 550184015  
L 1000: 550184016



OAK BARON SIENNA

Product code  
XL 1200: 550184021  
L 1200: 550184022  
XL 1000: 550184023  
L 1000: 550184024



OAK LORD

Product code  
XL 1200: 550184017  
L 1200: 550184018  
XL 1000: 550184019  
L 1000: 550184020



OAK BARON CORAL

Product code  
XL 1200: 550184025  
L 1200: 550184026  
XL 1000: 550184027  
L 1000: 550184028



OAK BARON BROWN

Product code  
XL 1200: 550184029  
L 1200: 550184030  
XL 1000: 550184031  
L 1000: 550184032

TECHNICAL DATA	STANDARDS	Tango Step L&XL
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	140 & 164 mm
Length	-	1000 & 1200 mm
Wear layer thickness	-	app. 2,8 mm

Step, sophisticated and elegant. Step is a selection of sophisticated and elegant designs in superior quality construction.

Combination of brushed structure, colours and innovative technology of digital print on parquet will provide distinctive beauty and comfort to any room.

Three stained designs, three designs created by technology of innovative digital print on real wood, two designs display genuine beauty of natural wood.

surface treatment



logistics information

1200x164x6=70,92 m<sup>2</sup> ; 1200x140x6=70,56 m<sup>2</sup>  
1000x164x6=59,04 m<sup>2</sup> ; 1000x140x6=50,40 m<sup>2</sup>

dimensions (mm)	140/164 x 1000/1200 mm		
locking system	T-Lock	m <sup>2</sup> /box	1.182 (164x1200)
			1.008 (140x1200)
			0.984 (164x1000)
			0.840 (140x1000)
planks/box	6	m <sup>2</sup> /pallet	70.92 (164x1200)
			70.56 (140x1200)
			59.04 (164x1000)
			50.40 (140x1000)



1-strip mini plank

warranty



general information





# RUMBA collection



Oak Forest



TECHNICAL DATA	STANDARDS	Rumba
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	120 mm
Length	-	1200 mm
Wear layer thickness	-	app. 3,6 mm

With our Rumba collection, every customer can create a modern and stylish living space. Don't forget – dancing was never as easy as now - so sail into Rumba space with beautiful wood flooring!

surface treatment



logistics information

dimensions (mm)	120x1200 mm	m <sup>2</sup> /box	0.864
locking system	T-Lock	m <sup>2</sup> /pallet	68,80
planks/box	6		




1-strip mini plank

warranty



general information





# SALSA ART VISION collection



Bright as Yellow



WHITE LIGHTNING

Product code: 550171009




IVORY DREAMS

Product code: 550171003



BRIGHT AS YELLOW

Product code: 550171011



GOLD DUST

Product code: 550171010




SUGAR CINNAMON

Product code: 550171007



TRUE BLUE

Product code: 550171001



CHOCOLATE SENSATION

Product code: 550171006



THE BRONZE AGE

Product code: 550171002



GREEN LIGHT

Product code: 550171004



BROWN STONES

Product code: 550171008



VIOLET HILL

Product code: 550171012



EBONY WIND

Product code: 550171005

TECHNICAL DATA	STANDARDS	Salsa Art Vision
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	194 mm
Length	-	2283 mm
Wear layer thickness	-	app. 3,6 mm


This collection is designed for people of sophisticated taste for decorating interiors, highlighting their creativity. Natural beauty of these wood flooring designs, combined with their individual character, will give your home a balanced feel. Unconventional beauty of these designs will enable you to play with colors and shades by paying attention to every detail. From white and beige, through different nuances of brown, to unique blue, green and violet color, this collection has something to offer to any type of interior. Due to individual grain of wood, every board is unique and Proteco Strong lacquer ensures the strongest surface protection on the market.

## surface treatment



## logistics information

dimensions (mm)	194x2283 mm	m <sup>2</sup> /box	2.658
locking system	T-Lock	m <sup>2</sup> /pallet	132,9
planks/box	6		



## warranty



## general information





# SALSA ART collection



Beige Sunshine



WHITE PEARL

Product code: 550050015



WHITE WEDDING

Product code: 550050021



WHITE CANVAS

Product code: 550050022



BEIGE SUNSHINE

Product code: 550050023



VANILLA CLOUDS

Product code: 550050020




SHADES OF GREY

Product code: 550050024



TOUCH OF GREY

Product code: 550050014



CREAM RHAPSODY

Product code: 550050016



BLACK OR WHITE

Product code: 550050018

TECHNICAL DATA	STANDARDS	Salsa ART
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	194 mm
Length	-	2283 mm
Wear layer thickness	-	app. 3,6 mm


Artisan Salsa Art collection combines wood with the latest advances in imaging, texturing and finishing to redefine the meaning of natural art and create the most authentic wood flooring. Choose between various design nuances. Let your dreams come true.

## surface treatment



## logistics information

dimensions (mm)	194x2283 mm	m <sup>2</sup> /box	2.658
locking system	T-Lock	m <sup>2</sup> /pallet	132,9
planks/box	6		



3-strip

## warranty




## general information










# SALSA PREMIUM collection

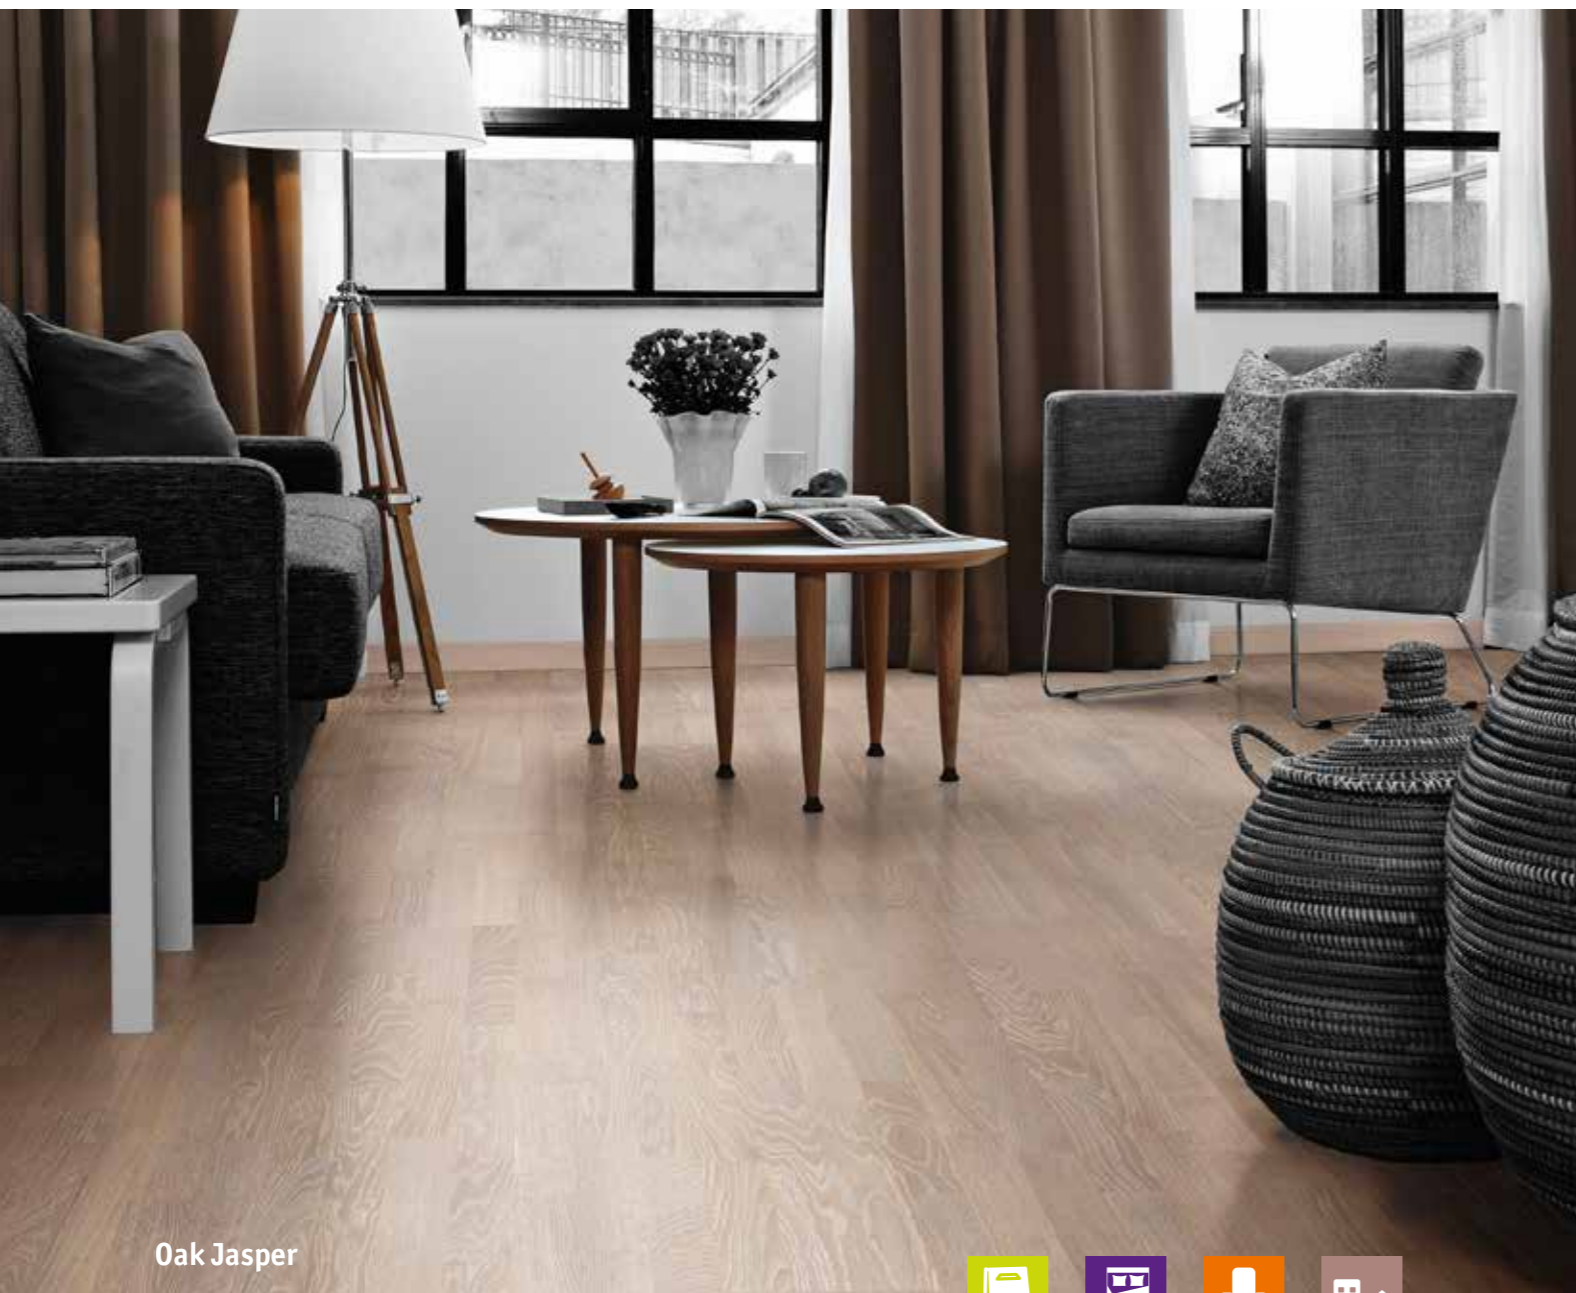

Oak Jasper



TECHNICAL DATA	STANDARDS	Salsa Premium
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	194 mm
Length	-	2283 mm
Wear layer thickness	-	app. 3,6 mm


Designed for Premium Taste. To be at a premium level means not to be common and therefore to have greater value than others of its kind. Just as gemstones are polished to enhance their color and clarity, which results in precious jewelry all Salsa Premium designs are produced with great attention and devotion. The natural beauty of these designs, with emphasized wood grain and warm colors, will bring peaceful atmosphere to both modern and classic interiors. Surface protection and durability are ensured by Proteco Hardwax oil which offers better protection than traditional oils thanks to the Hardwax component.

## surface treatment



## logistics information

dimensions (mm)	194x2283 mm	m <sup>2</sup> /box	2,658
locking system	T-Lock	m <sup>2</sup> /pallet	132,9
planks/box	6		



3-strip

## warranty



## general information





# SALSA collection



TECHNICAL DATA	STANDARDS	Salsa
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	194 mm
Length	-	2283 mm
Wear layer thickness	-	app. 3,6 mm


Salsa, the most diversified wood flooring collection, brings the power of nature to your living and working space. Wood species from all over the world, around 30 designs and various surface effects are designed to rediscover charms of emotions and secrets of life.

surface treatment



logistics information

dimensions (mm)	194x2283 mm	m <sup>2</sup> /box	2,658
locking system	T-Lock	m <sup>2</sup> /pallet	132,90
planks/box	6		



3-strip

warranty



general information



ASH NATURE

Product code: 550049061



ASH ARCTIC

Product code: 550049060



OAK NORDIC WHITE

Product code: 550049072



ASH TIRAMISU

Product code: 550049092



OAK ROBUST WHITE BR

Product code: 550049075



OAK IVORY BR

Product code: 550049081




ASH CREAM BR

Product code: 550049100




OAK SAHARA

Product code: 550049073



OAK ORIGINAL HG

Product code: 550049074




OAK RUSTIC

Product code: 550049079



OAK NATURE

Product code: 550049070



OAK NATURE BR

Product code: 550049069




OAK PREMIUM

Product code: 550049076



OAK SELECT

Product code: 550049080




ASH SPICE

Product code: 550049057




OAK CINNAMON BR

Product code: 550049099




OAK VINTAGE BR

Product code: 550049068




WALNUT

Product code: 550049090



OAK CHOCOLATE

Product code: 550049077



AFRICAN MAHOGANY

Product code: 550049056




MERBAU

Product code: 550049065




ASH COGNAC HG

Product code: 550049098



RED OAK COFFEE BR

Product code: 550049082



OAK COCOA

Product code: 550049078




OAK JAVA BR

Product code: 550049067



# BOLERO collection

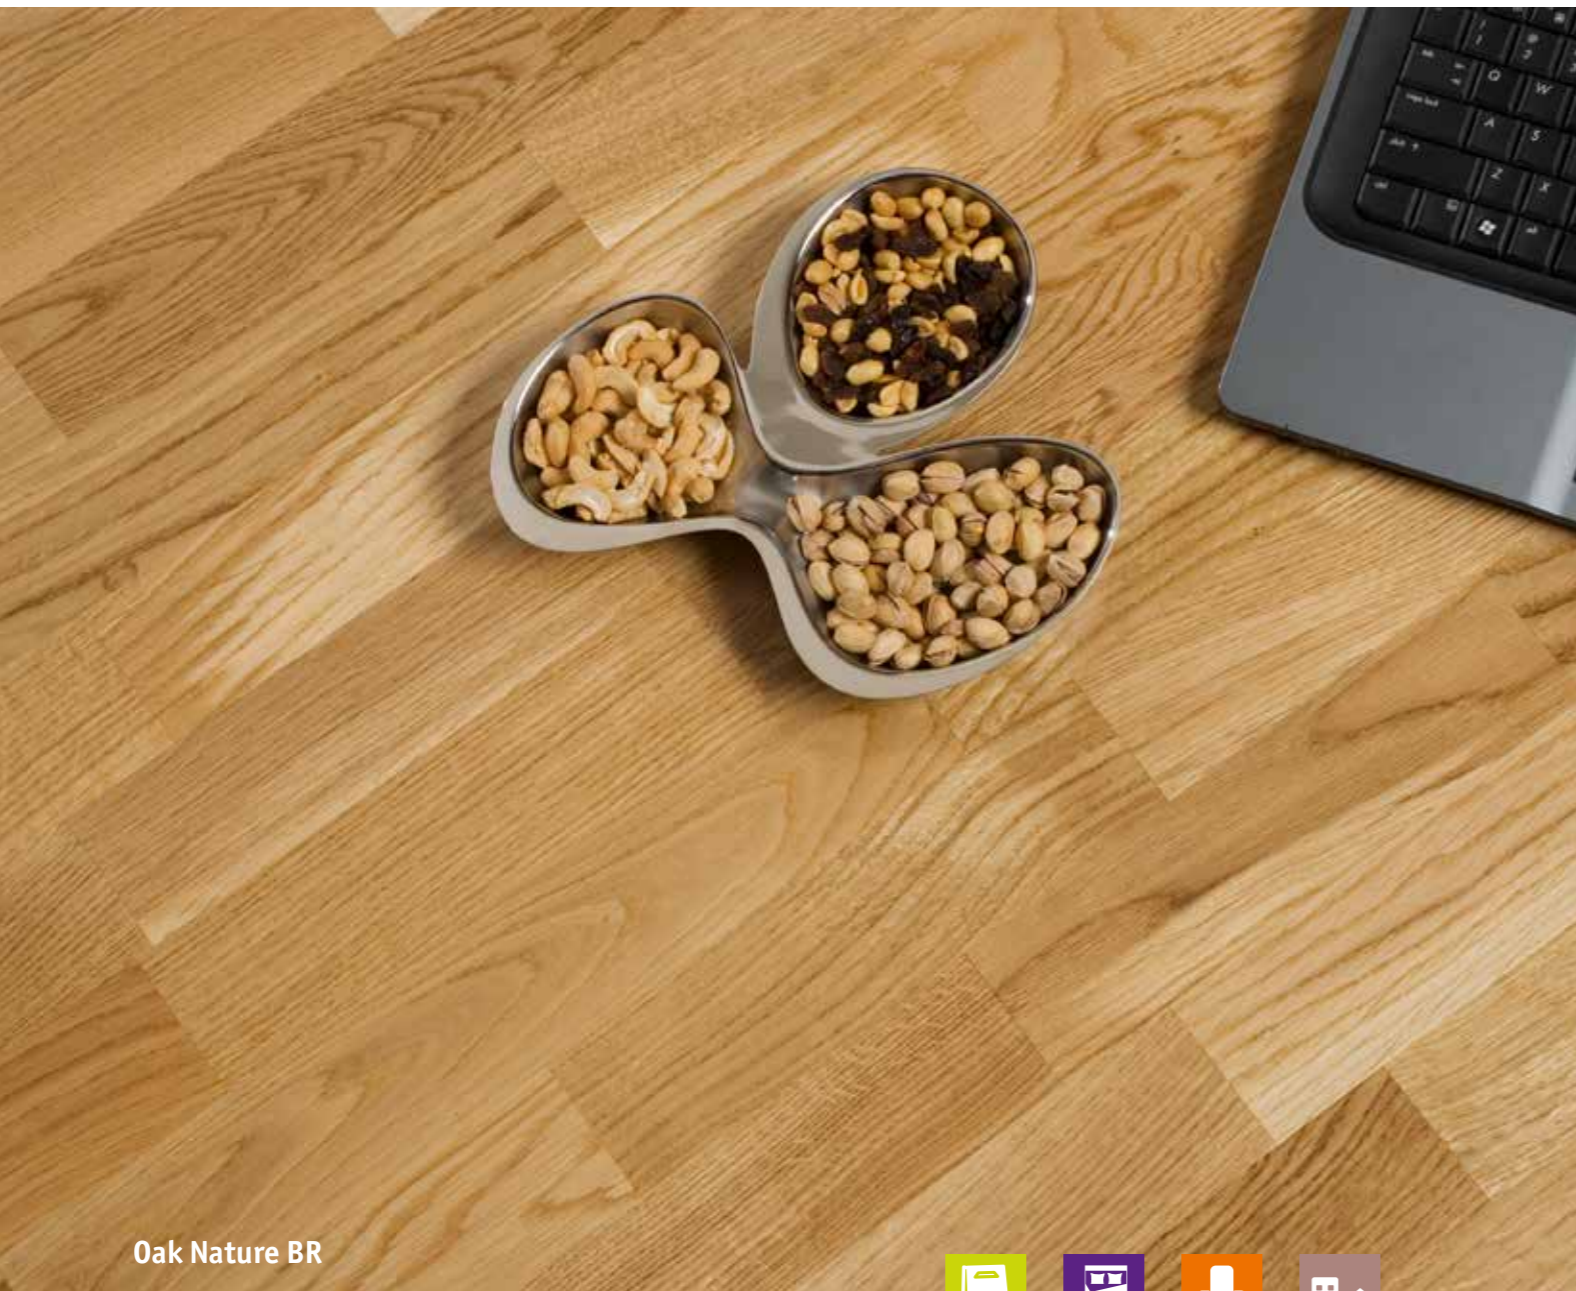

Oak Nature BR




OAK NATURE BR

Product code: 550035017




ASH COFFEE WHITE

Product code: 550035013



ASH COGNAC GREY BR

Product code: 550035012



OAK EBONY

Product code: 550035019

TECHNICAL DATA	STANDARDS	Bolero
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	194 mm
Length	-	1123 mm
Wear layer thickness	-	app. 3,6 mm


For cozy moments. Fill your home with natural colors from Bolero collection. The special charm and the modern touch will bring you cozy moments! Sail through various nuances and structures of Oak, Ash or Beech. And do not forget to enjoy the exciting details of your own space.

## surface treatment



## logistics information

dimensions (mm)	194x1123 mm	m <sup>2</sup> /box	1,307
locking system	T-Lock	m <sup>2</sup> /pallet	47,05
planks/box	6		



3-strip

## warranty



## general information






# SAMBA collection



Oak Cream



OAK VANILLA BR

Product code: 550051048



OAK CREAM

Product code: 550051039



BEECH ORIGINAL

Product code: 550051033



OAK NATURE

Product code: 550051038



OAK ARCTIC BR HG

Product code: 550051047



ASH BRANDY

Product code: 550051046



OAK BRANDY

Product code: 550051035



OAK HONEY

Product code: 550051037



OAK ANTIQUE

Product code: 550051036



AFRICAN MAHOGANY

Product code: 550051026



ASH COCOA BR

Product code: 550051049



ASH SMOKED

Product code: 550051028

TECHNICAL DATA	STANDARDS	Samba
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	194 mm
Length	-	1123 mm
Wear layer thickness	-	app. 3,6 mm

Samba, a bridge between tradition and the modern, with the most common wood species and design range, leaves no space for surprises. It's a simple solution for every taste. Beautiful wood designs display variety of natural lines combining it with durability and providing attractive interiors.

surface treatment



logistics information

dimensions (mm)	194x1123 mm	m <sup>2</sup> /box	1.307
locking system	T-Lock	m <sup>2</sup> /pallet	65,35
planks/box	6		



3-strip

warranty



general information





# PERFECT PAIR fairytale

## Find your Perfect Pair

Do you know when penguins search for partners, they usually stay with the same for a lifetime? With a perfect match option, you won't regret and you will be satisfied for life! Tarkett Perfect Pair Story begs you to pause, unwind, and look down in admiration. This means not just simply matching two or three various designs, but also carefully combining wood flooring designs, skirting, furniture and wall colors!



*Glamorous...*

A glamorous feeling when you find your ideal combination...



Tango Art  
Cream  
New York



Tango  
Ash  
Cognac BR



Tango Art  
Amber  
Johannesburg



*Extravagant...*

It's said that dreams are actually your guide through life. Sometimes you can't remember what was your dream, but you still can describe colors that you saw in some dream.



*Natural...*

Silent power and beauty of the natural is an entrance fee for life balance...



Tango Art  
White  
Moscow



Tango Art  
Cream  
New York



Tango Art  
Brown  
Barcelona



Tango  
Oak  
Nature



Tango  
Oak  
Skandinavian



*Modern...*

To love... To laugh...  
To search... Some modern life! Spring your wings and live your fantasy.



*Mysterious...*

Mystery creates a connection between lost sides...



Tango Art  
White  
Moscow



Tango Art  
Amber  
Johannesburg



Tango Art  
Violet  
Tokyo



Tango  
Oak  
Seashell BR



Tango  
Oak  
Java BR



# PERFORMANCE FASHION collection

Product name and product code:	Which Performance Fashion is best for you?	Color variation over time:	Color variation scale:	Hardness test:	Digital print:	Brushed:	Bevel:	Finishing:
<b>Gianni Style</b> 550169017								
<b>Gianni Boho</b> 550169015								
<b>Gianni Eccentric</b> 550169016								
<b>Vivienne New Look</b> 550169011								
<b>Vivienne Eccentric</b> 550169009								
<b>Vivienne Grunge</b> 550169010								
<b>Coco Shine</b> 550169006								
<b>Coco Elegance</b> 550169007								
<b>Coco Boho</b> 550169008								
<b>Nina Elegance</b> 550169013								
<b>Nina Black Out</b> 550169012								
<b>Nina New Look</b> 550169014								
<b>Salvatore Eccentric</b> 550169005								
<b>Salvatore Grunge</b> 550169003								
<b>Salvatore Shine</b> 550169004								

## COLLECTIONS overview



# PERFORMANCE FASHION collection

Product name & code:	Which Performance Fashion is best for you?	Color variation over time:	Color variation scale:	Hardness test:	Brushed:	Bevel:	Finishing:
Salvatore Style 550169001		↓ least ↑ most	least more most	softer harder	DIGITAL PRINT	MAXI BEVEL	proteco Shiny
Louis Eccentric 550169020		→ least ← most	least more most	softer harder	DIGITAL PRINT	MAXI BEVEL	proteco Shiny
Louis New Look 550169018		↓ least ↑ most	least more most	softer harder	DIGITAL PRINT	MAXI BEVEL	proteco Shiny
Louis Elegance 550169019		→ least ← most	least more most	softer harder	DIGITAL PRINT	MAXI BEVEL	proteco Shiny
Paco New Look 550169021		↓ least ↑ most	least more most	softer harder	DIGITAL PRINT	MAXI BEVEL	proteco Shiny

# TANGO VINTAGE collection

Product name and product code:	Which Tango Vintage is best for you?	Color variation over time:	Color variation scale:	Hardness test:	Special surface effects:	Oil type/Brushed:	Bevel:	Finishing:
Andalucia 550129002		↓ least ↑ most	least more most	softer harder	HAND SCRAPE	OIL COLORED	4 SIDE BEVEL	proteco Shiny
Rioja 550129001		→ least ← most	least more most	softer harder	DISTRESS	OIL COLORED	4 SIDE BEVEL	proteco Shiny
Tuscany 550129005		↓ least ↑ most	least more most	softer harder	SAW MARK	OIL COLORED	4 SIDE BEVEL	proteco Shiny
Provence 550129008		→ least ← most	least more most	softer harder	SAW MARK	OIL COLORED	4 SIDE BEVEL	proteco Shiny
Champagne 550129004		↓ least ↑ most	least more most	softer harder	HAND SCRAPE	OIL TRANSPARENT	4 SIDE BEVEL	proteco Shiny
Veneto 550129009		↓ least ↑ most	least more most	softer harder	SAW MARK	OIL COLORED	MAXI BEVEL	proteco Shiny
Baden 550129006		↓ least ↑ most	least more most	softer harder	SAW MARK	OIL COLORED	4 SIDE BEVEL	proteco Shiny
Porto 550129007		→ least ← most	least more most	softer harder	DISTRESS	OIL COLORED	4 SIDE BEVEL	proteco Shiny
Bordeaux 550129003		↓ least ↑ most	least more most	softer harder	SAW MARK	OIL COLORED	4 SIDE BEVEL	proteco Shiny

# TANGO ART collection

Product name and product code:	Which Tango Art is best for you?	Color variation over time:	Color variation scale:	Hardness test:	Staining/Digital print:	Brushed:	Bevel:	Finishing:	Heat treated:
White Moscow 550059008		↓ least ↑ most	least more most	softer harder	DIGITAL PRINT	MAXI BEVEL	HAND BEVEL	proteco Matt	
Violet Tokyo 550059005		→ least ← most	least more most	softer harder	DIGITAL PRINT	MAXI BEVEL	MAXI BEVEL	proteco Shiny	
Pearl Dubai 550059001		↓ least ↑ most	least more most	softer harder	DIGITAL PRINT	MAXI BEVEL	MAXI BEVEL	proteco Shiny	
Beige Lisbon 550059013		↓ least ↑ most	least more most	softer harder	DIGITAL PRINT	MAXI BEVEL	MAXI BEVEL	proteco Shiny	
Cream New York 550059003		→ least ← most	least more most	softer harder	DIGITAL PRINT	MAXI BEVEL	MAXI BEVEL	proteco Matt	Heat treated
Brown Barcelona 550059002		→ least ← most	least more most	softer harder	DIGITAL PRINT	MAXI BEVEL	HAND BEVEL	proteco High gloss	Heat treated
Grey Rome 550059010		→ least ← most	least more most	softer harder	DIGITAL PRINT	MAXI BEVEL	MAXI BEVEL	proteco Shiny	
Amber Johannesburg 550059012		↓ least ↑ most	least more most	softer harder	DIGITAL PRINT	MAXI BEVEL	MAXI BEVEL	proteco Shiny	



# TANGO collection

Product name and product code:	Which Tango is best for you?	Color variation over time:	Color variation scale:	Hardness test:	Staining/Digital print:	Brushed:	Bevel:	Finishing:	Heat treated:
<b>Oak Amaryllis</b> 550058031		→ least most	least more most	softer harder					
<b>Oak Scandinavian</b> 550058015		→ least most	least more most	softer harder					
<b>Oak Nature</b> 550058014		→ least most	least more most	softer harder					
<b>Oak Seashell BR</b> 550058013		→ least most	least more most	softer harder					
<b>Oak Antique BR</b> 550058018		→ least most	least more most	softer harder					
<b>African Mahogany</b> 550058002		→ least most	least more most	softer harder					
<b>Oak Cumin BR</b> 550058017		→ least most	least more most	softer harder					
<b>Ash Cognac</b> 550058005		→ least most	least more most	softer harder					
<b>Ash Cognac BR</b> 550058004		→ least most	least more most	softer harder					
<b>Oak Java Gold BR</b> 550058024		→ least most	least more most	softer harder					
<b>Oak Schwarzwald</b> 550058029		→ least most	least more most	softer harder					

# TANGO CLASSIC collection

Product name and product code:	Which Tango Classic is best for you?	Color variation over time:	Color variation scale:	Hardness test:	Oil type:	Brushed:	Bevel:	Finishing:	Heat treated:
<b>Ash Alabaster</b> 550182001		↑ least most	least more most	softer harder					
<b>Oak Bright</b> 550182002		↑ least most	least more most	softer harder					
<b>Oak Sepia</b> 550182003		↑ least most	least more most	softer harder					
<b>Ash Distinct</b> 550182004		↑ least most	least more most	softer harder					
<b>Oak Copper</b> 550182005		↑ least most	least more most	softer harder					
<b>Oak Sienna</b> 550182006		↑ least most	least more most	softer harder					



# STEP collection

Product name and product code:	Which Step is best for you?	Color variation over time:	Color variation scale:	Hardness test:	Staining/Digital print:	Brushed:	Bevel:	Finishing:
Royal Azure		↓ least ↑ most	least more most	softer harder				 Shiny
Oak Royal Ant. Wh.		↓ least ↑ most	least more most	softer harder				 Shiny
Oak Royal		↓ least ↑ most	least more most	softer harder				 Shiny
Oak Lord		↓ least ↑ most	least more most	softer harder				 Shiny
Oak Baron		↓ least ↑ most	least more most	softer harder				 Shiny
Oak Baron Sienna		↓ least ↑ most	least more most	softer harder				 Shiny
Oak Baron Coral		→ least ↑ most	least more most	softer harder				 Shiny
Oak Baron Brown		↓ least ↑ most	least more most	softer harder				 Shiny

OAK ROYAL AZURE  
Product code  
XL 1200: 550184001  
L 1200: 550184002  
XL 1000: 550184003  
L 1000: 550184004

OAK ROYAL ANTIQUE WHITE  
Product code  
XL 1200: 550184005  
L 1200: 550184006  
XL 1000: 550184007  
L 1000: 550184008

OAK ROYAL  
Product code  
XL 1200: 550184009  
L 1200: 550184010  
XL 1000: 550184011  
L 1000: 550184012

OAK LORD  
Product code  
XL 1200: 550184017  
L 1200: 550184018  
XL 1000: 550184019  
L 1000: 550184020

OAK BARON  
Product code  
XL 1200: 550184013  
L 1200: 550184014  
XL 1000: 550184015  
L 1000: 550184016

OAK BARON SIENNA  
Product code  
XL 1200: 550184021  
L 1200: 550184022  
XL 1000: 550184023  
L 1000: 550184024

OAK BARON CORAL  
Product code  
XL 1200: 550184025  
L 1200: 550184026  
XL 1000: 550184027  
L 1000: 550184028

OAK BARON BROWN  
Product code  
XL 1200: 550184029  
L 1200: 550184030  
XL 1000: 550184031  
L 1000: 550184032

# RUMBA collection

Product name and product code:	Which Rumba is best for you?	Color variation over time:	Color variation scale:	Hardness test:	Staining:	Brushed:	Bevel:	Finishing:
Oak Snow 550048009		↓ least ↑ most	least more most	softer harder				 High gloss
Oak Iceberg BR 550048014		↓ least ↑ most	least more most	softer harder				 Shiny
Oak Canyon 550048006		→ least ↑ most	least more most	softer harder				 Shiny
Oak Sand 550048007		↓ least ↑ most	least more most	softer harder				 Matt
Ash Stone 550048001		↓ least ↑ most	least more most	softer harder				 Shiny
Ash Bay BR 550048015		→ least ↑ most	least more most	softer harder				 Shiny
Oak Savanna 550048005		↓ least ↑ most	least more most	softer harder				 Shiny
Oak Field BR 550048013		→ least ↑ most	least more most	softer harder				 Shiny
Oak Lava 550048004		→ least ↑ most	least more most	softer harder				 Shiny
Oak Forest 550048008		→ least ↑ most	least more most	softer harder				 Matt
Ash Cave 550048002		↓ least ↑ most	least more most	softer harder				 High glos
Oak Monsoon 550048010		↓ least ↑ most	least more most	softer harder				 High glos



# SALSA ART VISION collection

Product name and product code:	Which Salsa Art Vision is best for you?	Color variation over time:	Color variation scale:	Hardness test:	Digital print:	Brushed:	Bevel:	Finishing:
<b>Ivory Dreams</b> 550171003		↓ least ↑ most	least more most	softer harder				
<b>True Blue</b> 550171001		→ least ← most	least more most	softer harder				
<b>Green Light</b> 550171004		→ least ← most	least more most	softer harder				
<b>The Bronze Age</b> 550171002		→ least ← most	least more most	softer harder				
<b>Sugar Cinnamon</b> 550171007		→ least ← most	least more most	softer harder				
<b>Chocolate Sensation</b> 550171006		→ least ← most	least more most	softer harder				
<b>Ebony Wind</b> 550171005		↓ least ↑ most	least more most	softer harder				
<b>White Lightning</b> 550171009		→ least ← most	least more most	softer harder				
<b>Gold Dust</b> 550171010		→ least ← most	least more most	softer harder				
<b>Brown Stones</b> 550171008		→ least ← most	least more most	softer harder				
<b>Bright as Yellow</b> 550171011		→ least ← most	least more most	softer harder				
<b>Violet Hill</b> 550171012		↓ least ↑ most	least more most	softer harder				

# SALSA ART collection

Product name and product code:	Which Salsa Art is best for you?	Color variation over time:	Color variation scale:	Hardness test:	Staining/Digital print:	Brushed:	Bevel:	Finishing:	Heat treated:
<b>White Canvas</b> 550050022		↓ least ↑ most	least more most	softer harder					
<b>Beige Sunshine</b> 550050023		↓ least ↑ most	least more most	softer harder					
<b>Shades of Grey</b> 550050024		↓ least ↑ most	least more most	softer harder					
<b>White Pearl</b> 550050015		↓ least ↑ most	least more most	softer harder					
<b>White Wedding</b> 550050021		↓ least ↑ most	least more most	softer harder					
<b>Vanilla Clouds</b> 550050020		↓ least ↑ most	least more most	softer harder					
<b>Touch of Grey</b> 550050014		→ least ← most	least more most	softer harder					
<b>Cream Rhapsody</b> 550050016		→ least ← most	least more most	softer harder					
<b>Black or White</b> 550050018		↓ least ↑ most	least more most	softer harder					



# SALSA PREMIUM collection

Product name and product code:	Which Salsa Premium is best for you?	Color variation over time:	Color variation scale:	Hardness test:	Oil Type:	Brushed:	Bevel:	Finishing:
<b>Oak Moonstone</b> 550170002		↓ least ↑ most	least more most	softer harder	<b>OIL COLORED</b>			
<b>Ash Opal</b> 550170001		→ least ← most	least more most	softer harder	<b>OIL COLORED</b>			
<b>Ash Crystal</b> 550170008		→ least ← most	least more most	softer harder	<b>OIL COLORED</b>			
<b>Ash Quartz</b> 550170003		↓ least ↑ most	least more most	softer harder	<b>OIL COLORED</b>			
<b>Oak Jasper</b> 550170004		↓ least ↑ most	least more most	softer harder	<b>OIL COLORED</b>			
<b>Oak Topaz</b> 550170006		↓ least ↑ most	least more most	softer harder	<b>OIL TRANSPARENT</b>			
<b>Oak Agate</b> 550170007		↓ least ↑ most	least more most	softer harder	<b>OIL COLORED</b>			
<b>Ash Garnet</b> 550170005		→ least ← most	least more most	softer harder	<b>OIL COLORED</b>			

# SALSA collection

Product name and product code:	Which Salsa is best for you?	Color variation over time:	Color variation scale:	Hardness test:	Staining:	Brushed:	Bevel:	Finishing:	Heat treated:
<b>Ash Nature</b> 550049061		→ least ← most	least more most	softer harder					
<b>Ash Arctic</b> 550049060		↓ least ↑ most	least more most	softer harder					
<b>Oak Nordic</b> 550049072		→ least ← most	least more most	softer harder					
<b>Oak Robust White</b> 550049075		→ least ← most	least more most	softer harder					
<b>Oak Ivory BR</b> 550049081		→ least ← most	least more most	softer harder					
<b>Oak Original HG</b> 550049074		↓ least ↑ most	least more most	softer harder					
<b>Oak Sahara</b> 550049073		↓ least ↑ most	least more most	softer harder					

# SALSA collection

Product name and product code:	Which Salsa is best for you?	Color variation over time:	Color variation scale:	Hardness test:	Staining/Digital print:	Brushed:	Bevel:	Finishing:	Heat treated:
<b>Oak Rustic</b> 550049079		→ least ← most	least more most	softer harder					
<b>Oak Nature</b> 550049070		→ least ← most	least more most	softer harder					
<b>Oak Nature BR</b> 550049069		→ least ← most	least more most	softer harder					
<b>Oak Premium</b> 550049076		→ least ← most	least more most	softer harder					
<b>Oak Select</b> 550049080		→ least ← most	least more most	softer harder					
<b>Ash Spice</b> 550049057		↓ least ↑ most	least more most	softer harder					
<b>African Mahogany</b> 550049056		↓ least ↑ most	least more most	softer harder					
<b>Merbau</b> 550049065		↓ least ↑ most	least more most	softer harder					
<b>Ash Cognac HG</b> 550049098		↓ least ↑ most	least more most	softer harder					
<b>Red Oak Coffee BR</b> 550049082		↓ least ↑ most	least more most	softer harder					
<b>Oak Java BR</b> 550049067		↓ least ↑ most	least more most	softer harder					
<b>Oak Vintage BR</b> 550049068		→ least ← most	least more most	softer harder					
<b>Walnut</b> 550049090		→ least ← most	least more most	softer harder					
<b>Oak Chocolate BR</b> 550049077		→ least ← most	least more most	softer harder					
<b>Oak Cocoa</b> 550049078		→ least ← most	least more most	softer harder					
<b>Ash Tiramisu</b> 550049092		→ least ← most	least more most	softer harder					
<b>Ash Cream BR</b> 550049100		↓ least ↑ most	least more most	softer harder					
<b>Oak Cinnamon BR</b> 550049099		↓ least ↑ most	least more most	softer harder					



# BOLERO collection

Product name and product code:	Which Bolero is best for you?	Color variation over time:	Color variation scale:	Hardness test:	Staining:	Brushed:	Bevel:	Finishing:	Heat treated:
<b>Oak Nature BR</b> 550035017		→ least most	least more most	softer harder					
<b>Ash Cognac Grey BR</b> 550035012		→ least most	least more most	softer harder					
<b>Ash Coffee White</b> 550035013		↕ least most	least more most	softer harder					
<b>Oak Ebony</b> 550035019		→ least most	least more most	softer harder					

# SAMBA collection

Product name and product code:	Which Samba is best for you?	Color variation over time:	Color variation scale:	Hardness test:	Staining/Digital print:	Brushed:	Bevel:	Finishing:	Heat treated:
<b>Oak Cream</b> 550051039		→ least most	least more most	softer harder					
<b>Beech Original</b> 550051033		→ least most	least more most	softer harder					
<b>Oak Nature</b> 550051038		→ least most	least more most	softer harder					
<b>Oak Arctic BR</b> 550051047		→ least most	least more most	softer harder					
<b>Oak Vanilla BR</b> 550051048		→ least most	least more most	softer harder					
<b>Oak Brandy</b> 550051035		→ least most	least more most	softer harder					
<b>Oak Honey</b> 550051037		→ least most	least more most	softer harder					
<b>Oak Antique</b> 550051036		→ least most	least more most	softer harder					
<b>Ash Brandy</b> 550051046		→ least most	least more most	softer harder					
<b>African Mahogany</b> 550051026		↕ least most	least more most	softer harder					
<b>Ash Cocoa BR</b> 550051049		→ least most	least more most	softer harder					
<b>Ash Smoked</b> 550051028		→ least most	least more most	softer harder					



# ACCESSORIES for hard floorings

## Wood SKIRTING

A skirting will make your wood flooring look even more refined. It's the ideal way to finish a wall in style. Professional designers carefully matched all Tarkett Wood flooring collections with a wide selection of skirting and hence balanced function and aesthetics, short-term cost with long-term investment and sustainability with performance. The results is more than two hundred floor and skirting matching combinations which can be in harmony, contrast, gradation or balance, all designed to create the perfect finish to your walls!


### 3D RENDER

#### SUPPORT MATERIAL

- Made from 100% real wood spruce
- Enables high stability and prevents from deforming

#### ADHESIVE

- Creates extremely tight bonds
- Environment-friendly and does not contain formaldehydes and solvents

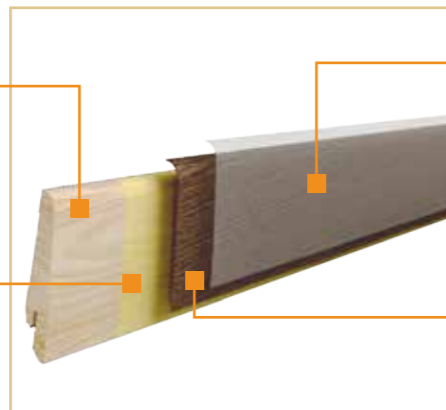

#### LACQUER

- Classic Lacquer
- Extremely durable and scratch-resistant

#### HIGH QUALITY REAL WOOD VENEER

- Made of prime quality wood
- Wide range of wood species
- Can be sanded in case of small damages




#### Structure of product:

- Support material – soft wood
- Adhesive
- High quality real wood veneer
- Lacquer surface treatment with UV-process

Find all skirting designs with matching schemes on <http://www.wood.tarkett.rs/Accessories.aspx>

Profile: 80 x 20 mm  
Length: 2,4 m  
Packaging: 10 x 2,4 m  
packed in card board

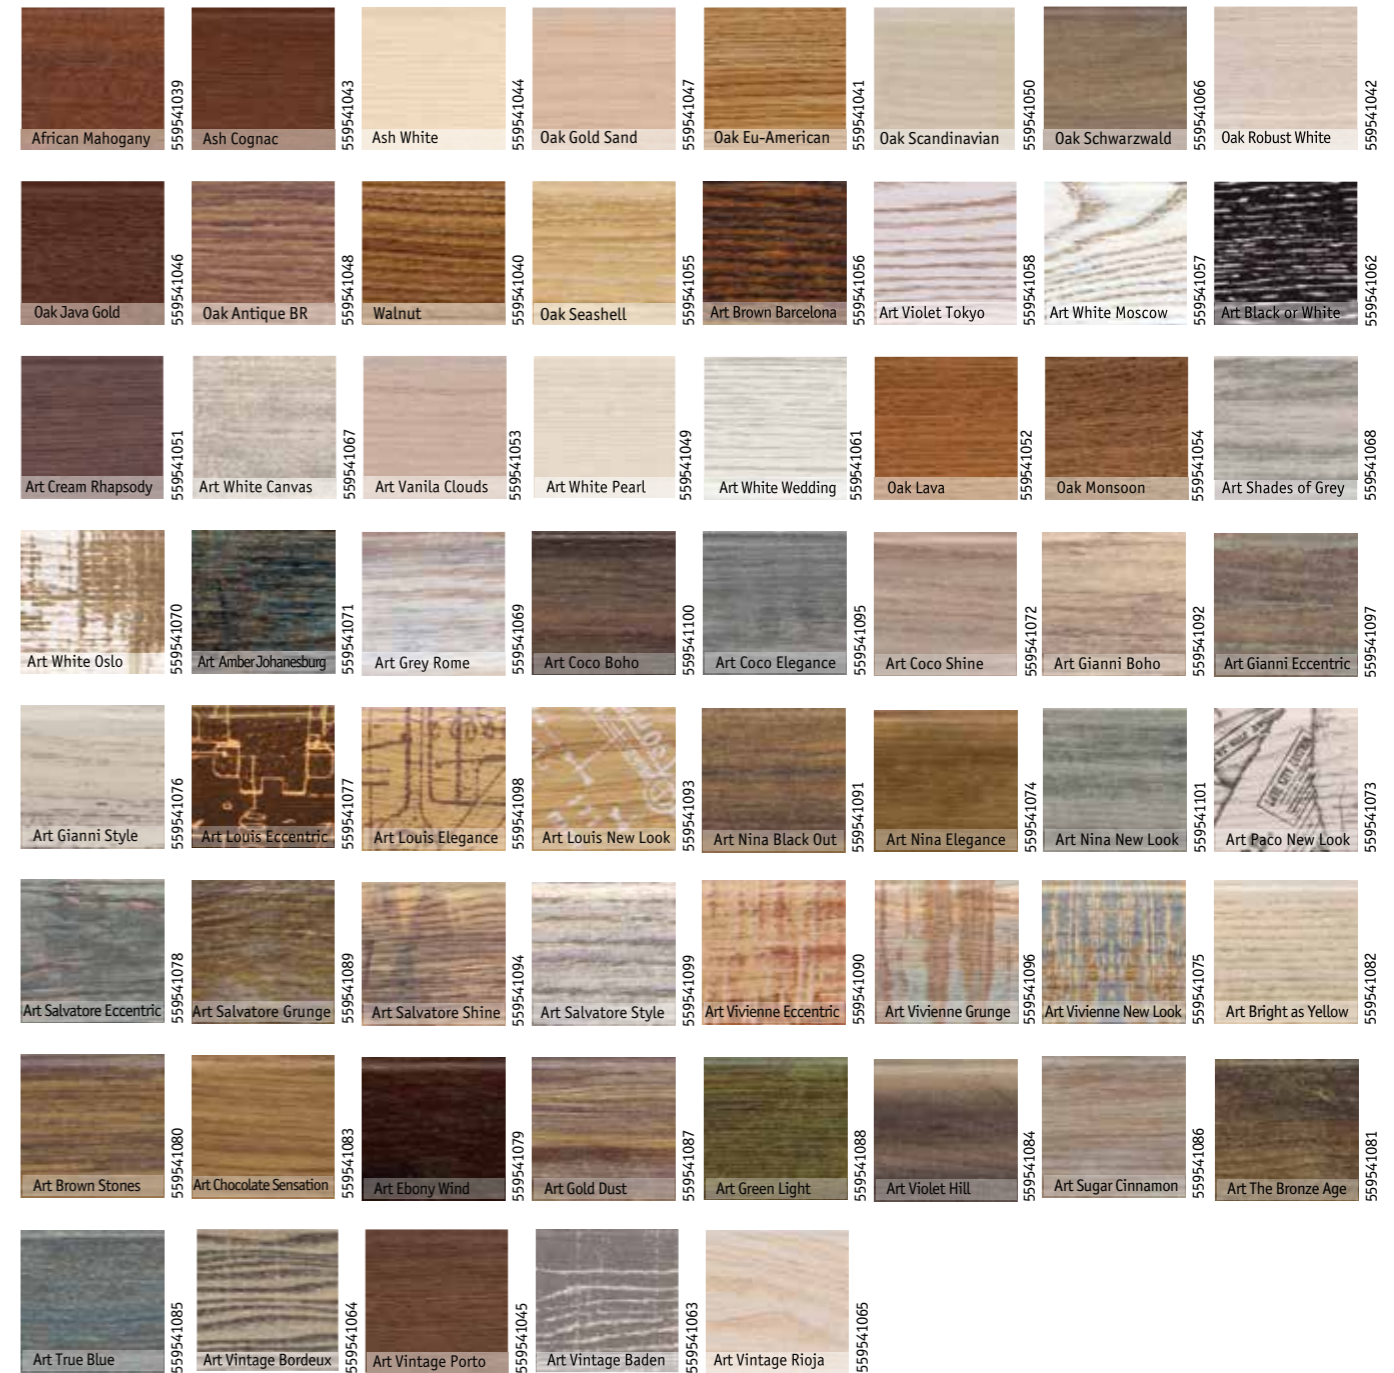



Profile: 60 x 16 mm  
Length: 2,4 m  
Packaging:  
10 x 2,4 m  
packed in card board



Profile: 60 x 23 mm  
Length: 2,4 m  
Packaging:  
10 x 2,4 m  
packed in card board




## Wood MOLDINGS

Decorative moldings are architectural details installed to trim wood floors, provide a transition between various floorings or make surface levels more even. If carefully installed, they can enhance any decor and increase the value of any home. They will help to give a finished look to your room.


available designs




Profile: End Profile  
40 x 20 mm  
Length: 1 m / 1,6 m  
Packaging:  
packed in card board

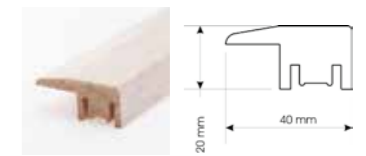

Profile: Reducer  
58 x 20 mm  
Length: 1 m / 1,6 m  
Packaging:  
packed in card board

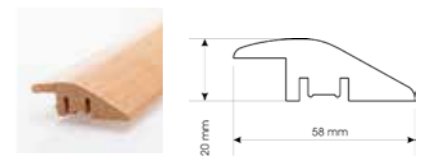

Profile: T Profile58  
x 20 mm  
Length: 1 m / 1,6 m  
Packaging:  
packed in card board

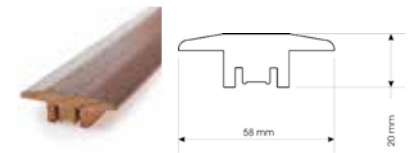

## Hi profile SKIRTINGS

Profile: 150 x 16 mm  
Length: 2,2 m  
Packaging:  
packed in card board  
Color: white



Gothic  
559527014



Roman  
559527026

Profile: 120 x 16 mm  
Length: 2,2 m  
Packaging:  
packed in card board  
Color: white



Renaissance  
559527025



Baroque  
559527007





## OTHER wood ACCESSORIES

### Pipe covers


Tarkett's Pipe covers are a perfect solution for finishing flooring at the radiator area. It will completely transform the look of your radiator and give it a fresh, trendy and modern touch. These one-of-the-kind product provide refined look to radiator pipes. Pipe Covers are made of solid wood in a variety of species and dimensions. We provide solutions for single and double pipes.



TECHNICAL DATA	Pipe covers
Dimensions:	19,2 mm i 25,4 mm
Available wood species design	Oak, Beech unfinished, Beech stained, Ash
Installation:	Decompose pipe cover, place around radiator pipe and compose it

### Protective chair mat

Tarkett's Protective chair mat protects floor against damages, caused by chair displacing at home offices. The usage of chair mats increases the lifetime of wood flooring and gives a quiet and flat running for swivel chairs. This product is virtually unbreakable and 100% PVC-free. In addition, our chair mats are exceptionally clear, enhancing the natural beauty of your wood floor.

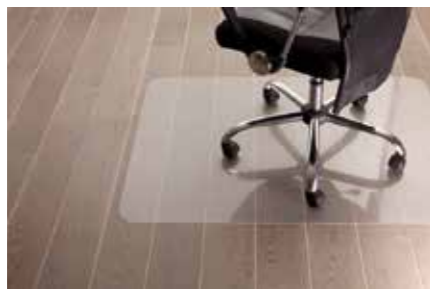

TECHNICAL DATA	Protective chair mat
Dimensions:	120 x 90 cm
Material:	Policarbonate semitransparent panel
Intended for:	Protection of wood flooring on the places where it is disposed to roll chair exploitation

### Protective pads

One of the easiest ways to help your wood flooring last longer is to prevent damage done by furniture legs. Even when you sweep and vacuum and think the floor is clean of grit, a chair can still damage a beautiful wood floor. Scratching occurs in wood and wood or metal and wood contacts as chairs slide back and forth. Floor protector pads are inexpensive compared to the cost of repairing the floor.



### Repair kit

Tarkett repair kit is a practical solution system for repairing hollow spots, dents and loose areas. It includes the touch-up lacquer, putty and sandpaper. Repairing is quick and low cost. Floor can be walked upon immediately after the repair. Cleaning dirt from affected areas serves as a secondary function.



## Wood flooring INSTALLATION GUIDE

### Main information

#### WOOD FLOORING INSTALLATION GUIDE

Tarkett Wood flooring offers a beautiful variety of options – from species and colour, to plank widths and finishes. We developed enhanced locking system, T-lock, and the best in the industry finish, Proteco, to enable fast and quick installation and immediate flooring consumption.

#### TOOLS AND ACCESSORIES NEEDED

1. Safety Glasses;
2. Tape Measure;
3. Moisture Meter;
4. Tarkett Tapping Block\* (Tapping Block);
5. Tarktool\*\* (Pull bar);
6. Saw (Hand Saw or Electric Miter Saw);
7. Colour Wood Filler;
8. Broom or vacuum;
9. Tarkett Cleaner Kit (recommended wood flooring cleaner);
10. Tarkett Underlayment (recommended underlayment);
11. Transition and wall mouldings

\* Use Tarkett Tapping Block – to protect the edges of the boards when tapping them together – never use a cut bit of board as a tapping block, as this will chip the edges.

\*\* Tarkett's pull bar - makes it easier to get the last row of boards in place.

#### Important information - Installer/Owner responsibility

It is EXTREMELY IMPORTANT that you read and understand this information completely prior to starting, since improper installation can void the warranties. Please, EXAMINE all of this flooring BEFORE installing this material. CAREFULLY EXAMINE this merchandise for color, finish, quality and style order BEFORE installing this material. Wood flooring installed with visible defects is not covered under warranty and Tarkett declines responsibility for any costs incurred when plank(s) with visible defects have been installed. Remember – wood is a natural product that can vary in color, grain and contains natural characteristics that varies from plank to plank and is to be expected. Tarkett does not warrant against these natural variations from plank to plank or variations from sample to plank. Remember – if you are not satisfied with the flooring prior to installation, simply return the cartons to your dealer for a full replacement. Accepting or rejecting the material must be done on full shipment quantities only, not carton by carton or plank by plank.






# Wood flooring INSTALLATION OPTIONS

## General Installation Tips


- Floor boards should be opened just before the installation, and all boards from opened cartons must be installed before some pauses.
- When installing 1-strip products, floor should be installed from several cartons at the same time to ensure good colour and shade mixture.
- When possible, pre select and set aside boards that blend best with all horizontally mounted mouldings used to assure a uniform final appearance. Install these boards adjoining the mouldings.
- Wood is a living material, which means that a floating wood flooring will expand or contract, despite the multilayer construction design, depending on how the indoor climate changes through the year. Therefore, you must leave a space (called an expansion gap) of at least 1.5 mm per meter width of floor, minimum 8-10 mm, between floor and wall around the whole room. This also applies between the floor and thresholds, pipes, steps, pillars, fireplaces, stone floors, etc.
- Be attentive to staggering the ends of the boards at least 50 cm in adjacent rows. This will help ensure a more favourable overall appearance of the floor.
- If the last row of boards will be narrower than 5 cm or if the wall is not straight, the first row of boards should be cut.
- Half boards from package are being used for the beginning or ending for different rows. Do not place it in central part of construction.



YOU AND YOUR INSTALLER ARE RESPONSIBLE TO INSPECT FLOORING PRIOR TO INSTALLATION. WE ACCEPT NO RESPONSIBILITY FOR LIABILITIES, CLAIMS OR EXPENSES, INCLUDING LABOR COSTS, WHERE FLOORING WITH VISIBLE DEFECTS HAS BEEN INSTALLED.

### Job-Site Conditions

It is the installer/owners' responsibility to ensure that the jobsite conditions and jobsite subfloor are environmentally and structurally acceptable prior to the installation of any hardwood flooring – permanent air conditioning and heating systems should be in place and operational (the installations site should have a consistent room temperature of 18 – 27°C and humidity of 30 – 60% for 14 days prior to and during installation and until occupied. The manufacturer declines any responsibility for failures or deficiencies of wood flooring resulting from or related to sub-floor, subsurface, or job site environmental conditions.



### Subfloor Conditions

All substrates must be clean, flat, dry, and structurally sound.

- **CLEAN** - Subfloors must be clean and free of dirt, curing compounds, sealers, drywall mud, paint, wax, grease or other materials that may affect the integrity of the flooring material or adhesives used to install the flooring.
- **LEVEL/FLAT** - Within 3 mm in 2,5 m and/or 1,2 mm in 1 m. Sand high areas or joints. Follow the instructions of the leveling compound manufacturer but make certain that the leveling compounds are completely DRY before beginning installation. Leveling materials must provide a structurally sound subfloor that does not affect the holding power of the fastener.
- **DRY** - Check and document moisture content of the subfloor using the appropriate moisture test. Concrete subfloors must be a minimum of 30 days old before testing begins. Moisture content of the subfloor must be less than 2% measured by CM method.

- **STRUCTURALLY SOUND** - Nail or screw any areas that are loose or squeak. Flatten edge swell as necessary. Replace any water-damaged, swollen or delaminated subflooring or underlayment. Avoid subfloors with excessive vertical movement. Optimum performance of wood floor covering products occurs when there is little horizontal or vertical movement of the subfloor. If the subfloor has excessive vertical movement (deflection) before installation of the flooring, it is likely it will do so after installation of the flooring is complete.

### Subfloors with Radiant Heat

NOTE: Always make certain the product selected is recommended for this type application. The Tarkett wood products made of beech and maple are not recommended to be installed over radiant heat subfloors.

- System must be operational and heated for at least 14 days prior to beginning the installation.
- Turn off heat and let subfloor cool down to room temperature 3–4 hours prior to starting the job.
- BEFORE installation begins, ascertain that the heating system is designed and controlled for wood flooring and that the circuit does not include other floor covering types. Failure to do so may cause excessive heat damage and shrinkage.
- After installation, turn the heating system back on immediately. The finished floor surface must not exceed 27°C throughout the life of the floor.
- Radiant heating systems normally create dry heat that can lower interior humidity levels. It may be necessary to add humidity with humidifiers to maintain the recommended levels (30–60%) and prevent damage to the wood flooring.
- The flooring should be end-glued over radiant heat to reduce longitudinal shrinkage. Wipe excess adhesive away immediately.

### Subfloor/underlayment requirements

Tarkett wood flooring can be installed on the following surfaces:

- Concrete and Cement screed
- Ceramic Tile, Terrazzo, Slate & Marble
- Wood subfloor
- Fully adhered vinyl sheet, resilient tile and linoleum

#### Concrete Subfloors

New concrete slabs require a minimum of 30 days drying time before covering them with a wood flooring until they have moisture content less than 2%.

#### Ceramic Tile, Terrazzo, Slate & Marble

All wax and sealers must be removed with an appropriate cleaner/stripper.

Ceramic tile and terrazzo should be abraded to allow for proper adhesion. Check for loose tiles by tapping and re-adhere. Fill grout lines with a cement latex fortified leveling compound (min. 3mm).

#### Wood subfloors

The wood subflooring materials must not exceed 10% moisture content. Use a reliable wood moisture meter, to measure moisture content of both - the subfloor and the wood flooring - to determine proper moisture content. The difference between the moisture content of the wood subfloor and the wood flooring must not exceed 4%.

#### Vinyl sheet, resilient tile and linoleum

Materials must be full spread and secured to the subfloor. Do not install over perimeter glued floors.





# Wood flooring INSTALLATION OPTIONS

## Instaling the floor

The stability of Tarkett multilayer wood construction allows several installation methods in residential areas – it can be floated or glued over most subfloors including concrete. Having a more than century long experience in manufacturing and installing floors Tarkett proudly recommends a floating installation since it offers a wide spectrum of advantages as it enables fast setting up, immediate consumption and elimination of additional expense in adhesive usage (See floating vs. glue-down installation table 1. page 78, 79).

Rather than being attached to the subfloor, boards are simply joined together and rest on the surface, hence the term ‘floating’. Wedges are placed around the perimeter of the room, to allow an expansion gap. This is then covered with beading to create a neat transmission between floor and wall. Tarkett wood collections feature glueless T-lock ‘click and lock’ systems, whereby the boards literally snap together, automatically lining up to create a perfect, flush finish. If any mistakes are made during installation, boards can be unlocked and reattached. Floating wood flooring can be installed on most dry, level surfaces and as each system differs in nature, specialist tools are often available. To reduce footstep noise and protect against moisture, a thin underlay is laid between the wood flooring and the sub-floor before installation. On the other hand, with glue-down installation, the wood planks are glued directly to the sub-floor. Adhesive is spread onto the sub-floor using a trowel and the planks are set into the glue.

## Underlayment

### Underlayment - Unique underlay solution

If you’re interested in installing a floating wood floor, then an underlayment is necessary. Since floating wood floorings are installed with a “free float” method where the wood is not actually attached to the sub-floor, it’s necessary to install a floor muffler underlayment before the wood is laid down. The wood flooring underlayment goes on over the sub-floor. In most cases, the wood flooring can be applied to the floor muffler underlayment by glue or by locking the boards together in glue less format.

Composition cork rolls shall be dispatched in packages that provide suitable protection, and which are sufficiently watertight to keep the moisture content of the cork. Packages shall be stored shielded from direct sunlight, heat and humidity. Roll shall be unpacked immediately before installation. Tarkett cork underlay is required over the entire surface on which we want to install flooring. Strips of Tarkett cork underlay need to be set directly next to each other with no gaps and overlaps. If necessary, strips can be fixed to each other in order to prevent their spacing during installation. Cork underlay can’t be used on concrete or any other basis that has a moisture content greater than 2% (CM).



Underlayment is crucial for successful wood flooring in general. Without smooth and solid subflooring, the finished wood flooring could fail or look very bad in a short amount of time. You may rely on our over a century-long experience in manufacturing and installing wood flooring.

**Tarkofflex underlayment** is a unique all-in-one underlay which provides fast setting up, immediate consumption and no additional expenses in adhesives usage.

1. step – Please, place the foil with Tarkett sign, down to the base. Sponge part of underlay must be on up part. Foil has the aim to make moisture barrier.

2. step – It is necessary to overlap 20 cm sponge over foil. Do not overlap sponge over sponge.

Note: these two kind of underlayment, have the redactor role of sound and air.



Tarkofflex underlayment

### Tarkett has launched Cork Underlay!

Under cork underlay PE foil in 0,2 mm need to be placed. This foil has steamprotection role.

Cork is natural material and it need to be protected from moisture.



Cork underlayment





# Tarkett wood FLOATING INSTALLATION




**Picture 1:** Before installing the first row, the part of the groove profile which sticks out must be cut off.



**Picture 2:** First row. Remember that the floorboards should preferably run along the length of the room. Start in a left-hand corner with the groove side against the wall and work towards the right. The next board is angled down into the short end of the previous board so that it slides into place. Press spacers between the floor and the wall to create an expansion gap of 8-10mm.



**Picture 3:** At the end of the row, turn the last board so that it lies tongue to tongue. Push the short end tightly against the wall. Mark where to cut with a pencil 8-10mm from the previous board's short end to give you an expansion.



**Picture 4:** Start the second row with the rest of the cut board. Lay the board in place in the groove without pressing it down. Angle the next board into place along the short end. Then push board until the long side is in place in the groove. The board should slide in the short end joint. Continue in the same way with the next board until the whole row is in place.




**Picture 5:** When the whole row is in place in the groove, press the whole row down at the same time to give an even and level joint.



**Picture 6:** A tip for efficient and fast installation is to lay out the new row of boards next to the previous row. Fix the short end joints in place with any spare bits of board, then lift the whole row into place and fold it down.



**Picture 7:** Final row: When you get to the final row, it is possible that will not fit width wise. In this case, place the final board with the tongue facing the wall, on top of and edge to edge with the last-but-one board. Place a spare bit of board on top and measure the gap by running the bit of board along the wall and marking with a pencil where to cut the final board. If the final row of boards has not been cut, the tongue must be sawn off in order to keep an expansion gap.



**Picture 8:** If there is no room to fold down the last board, it can be slide in from the side instead. In order to do this, the tongue of the board has to be made level. Use a chisel to shave off the part of the tongue which raises like a bump along the top of the outside edge.



**Picture 9:** Place a thin bead of adhesive along the top edge of the modified tongue. Then tap the board sideways with a pull bar. Finish by placing spacers in the expansion gap between floor and wall. Now that the floor has been installed, skirtings and any joining strips can be fitted.



**Picture 10:** If the long side of the board meets a pipe: Drill a hole with a diameter approx. 16mm greater than the pipe diameter to give an expansion gap around the pipe. Mark with a pencil where to saw. Saw off the bit which will fit behind the pipes, closest to the wall. Cut at an angle as shown in the picture. If the pipes are located along the short side of the floor, cut the board at a 90° angle straight through the holes.



**Picture 11:** Tap the board in position, glue the loose piece in place, fit a spacer against the wall and cover with pipe collars.



**Picture 12:** Doorframes can be removed and moved up, but it is usually easier to saw them off. Use a loose floorboard as a height template and saw the frame with a fine-toothed saw. Push the floor under the frame. Ensure that the floor is not wedged between the subfloor and the frame.

Fast, simple installation

Maximum strength of the joints achieved straight after assembly

The floor is ready to use immediately

Installation errors can be corrected immediately

No need to use glue

Damaged boards can be easily replaced

Easy access to floor surface (allowing for possible repairs and maintenance works)

The floor adjusts easily to the temperature and humidity changes within the room

Quick and easy disassembly

The parquet can be reused in another room

Installation acquire transition mouldings

Max installed area without transition mouldings 240m<sup>2</sup> max 12x20m

Very stabile construction

# Tarkett wood GLUE-DOWN INSTALLATION

Takes slightly longer to install - the adhesive needs to be applied and any excess glue has to be removed

The joint becomes fully resistant only after the adhesive is completely dry

The floor can be walked on after 12 hours (minimum) and is full bonded after 1-2 days

Installation errors can not easily be corrected

Use of an adhesive is essential

Easy replacement of a damaged boards is not possible

The floor s surface is not easily accessed

Correct temperature and humidity levels should be adhered to

Quick and easy disassembly is not possible

The floor can not be re-assembled

Installation does not require transition mouldings

No limitation in installed area

Little bit more stabile construction



**Picture 1:** Before installing the first row, the part of the groove profile which sticks out must be cut off.



**Picture 2:** Measure out the first row of boards by laying them out without any adhesive.



**Picture 3:** At the end of the row, turn the last board so that it lies tongue to tongue. Push the short end tightly against the wall. With a pen, mark where to cut 8-10 mm from the end of the previous board, to make it easier to get the board into place.



**Picture 4:** Cut the board to the right length with a handsaw (from the top of the board) or a circular saw (from the underside).



**Picture 5:** Take up the row of boards you laid out. Spread adhesive over the subfloor where the whole row of boards will lie. Lay the boards down one by one and wedge them against the wall.



**Picture 6:** Repeat points 2-4, take up and spread adhesive. Start the second row with the rest of the board cut from the first.



**Picture 7:** Angle the next board into place along the short end. Then push the board until the long side is in place in the groove. Do not press the board down into the adhesive. Continue in the same way with the next board until the whole row is in place. Lay the board in place in the groove without pressing it down.



**Picture 8:** Go back along the row of boards, pressing them down against the subfloor (into the adhesive). Continue as in points 6-8.



**Picture 9:** The final row of boards usually needs to be cut along its length. With its tongue against the wall, place the final board exactly on top of the last-but-one board. Place a spare bit of board on top and measure the gap by running the bit of board along the wall and marking with a pencil where to cut the final board. Even if the board does not need cutting along its length, the part of the tongue which sticks out must still be cut off (to give the floor room to move). Saw and press down the final row of boards.



**Picture 10:** If there is no room to fold down the last board, it can be slid in from the side instead. In order to do this, the tongue of the board has to be made level. Use a tool such as a chisel.



**Picture 11:** Doorframes can be removed and moved up, but it is usually easier to saw them off. Use a loose board as a height template and saw the frame with a fine-toothed saw. Push the floor under the frame. See also point 10. to shave off the part of the tongue which raises like a bump along the top of the outside edge.



**Picture 12:** Out adhesive, lay the last row of boards and tap them into place using the pull bar.





## Wood ACCESSORIES INSTALLATION

### Skirting and molding

#### a) Skirting

Tarkett skirting are designed to perform well by being easy to install, remove or reinstall in little time and with less disruption. Our veneered profiles are natural products which are produced in an environmentally friendly way. New wood types are constantly being added so we can fulfill every customer need.

#### Installation of skirting by using Clip Star mechanism:

Clips for fixing skirting allow cables to be hidden behind the profiles. Tarkett Clips is a new technology for finishing your flooring. Clips mechanism is extremely user-friendly. This new technology enables easy and invisible mounting of skirting boards to the wall. Repeated mounting can be performed easily without any tools which makes this system adjustable and functional.



#### Skirting installation by using the glue:

1. You must do skirting "tailoring" in order to satisfy your space needs.
2. Place Montage joint on skirting to every 30 cm thickness around 1 cm.
3. Place the skirting against the wall and on some parts place the screws with small head. Screw has the role to hold the skirting while the joint is getting dried.
4. If your wall is not straight you should close the band part of wall with Acrylic joint into several layers. The other solution must be cutting skirting and continue with placing the same on every band places in order to accomplish non straight part of skirting with the mentioned.

**Note:** Acrylic joint must be placed between skirting and wall to fulfill the holes. This joint is in white color. Between skirting and parquet in some holes you must put acrylic joint in wood flooring color.

#### b) Molding

- Molding should be "tailored" according to space needs.
- Screw the holder of molding on match two different floorings. Take care about expansion gaps.
- Place the skirting into holder (push).


#### T profile (Combistar)

T profile is a perfect solution for spanning gaps between different floor heights and types. Flexible turning system enable easy adjustment of height and slope. Different Combistar heights can be obtained by shortening the profile by carpet knife.



#### End profile

End Profile is a perfect solution for finishing the flooring at the points where a dressed edge is required, e.g where floor meets a front door, patio door or an inset door mat.



#### Reducer

Reducer is a perfect solution for slopping the final piece of wood flooring to meet a transitional type of flooring, vinyl or carpet and create finished look without the hard edge of a threshold.





## CARE and MAINTENANCE

The finishing technology used for Tarkett wood floorings makes them the best choice for easy maintenance. To preserve all the beauty of your Tarkett wood flooring, simply follow very simple protection suggestions. Tarkett wood floorings can be cleaned in three quick and easy steps.

### 1. Protecting your investment

Although your Tarkett wood floorings finish is more resistant to wear than most other finishes on the market, it is not indestructible. With regular preventive maintenance, you will be able to enjoy the beauty of your floor for an extended period of time.

### 2. We recommend that you:

- Sweep or vacuum regularly to rid your floor of dust and eliminate abrasives that can scratch the finish.
  - Wipe up any spilled liquid quickly from your floor.
  - Watch out for high heels and some kinds of sport footwear, particularly if they're worn or damaged.
- Note: Only water and sand are worse enemies of wood flooring than high heel shoes. In fact, high heels can damage any floor covering, even cement.
- Put mats outside and inside entrances to prevent build up of sand and dirt on the floor.
  - Put mats in front of the kitchen sink, the dishwasher, and all kitchen work stations to protect your floor from kitchen mishaps like dropped utensils and spills of water, detergent, and food.
  - Avoid rubber or other dense mat backing that prevent airflow abrasive dirt and moisture.
  - Attach felt pads under any furniture or chair legs to ease movement and prevent scratches. Keep the pads clean and replace if damaged.
  - Protect the floor when moving furniture or heavy objects. Use a mat turned upside down with a slightly smaller piece of plywood on top of it. Place furniture on top and slide it.
  - Maintain humidity levels between 30 and 60%, for your own health as well as for the protection of your floor and wooden furniture. Wood is a natural material that reacts to relative humidity variations when moisture is absorbed or released.
  - Avoid exposing your floor to sunlight and intense artificial light, which can cause wood to change color. This is a completely normal and natural phenomenon. The lighter the wood, the more pronounced the change will be.
  - Move your carpets and furniture occasionally and use a minimum number of light sources to keep color changes uniform.
- Note: Color change is not caused by the yellowing of the finish; it is a natural change of the wood's color.

## For lacquered collections

**TARKETT CLEANER** - is an efficient cleaner for all types of wood flooring, very economical in use. Tarkett Cleaner is used **for daily cleaning** and is suitable for both domestic use and public environments.

Working method for normal cleaning: When it comes to spot cleaning, just sprinkle on the surfaces using spray bottle and simple mop the surface. Product information: neion.active substance, natrium citrate, ethanol and water pH = 8.

**TARKETT REFRESHER** - cleans and protects all prefinished wood flooring. It contains microscopic varnish pigments which reinforce varnished surfaces and remove thin scratches. Tarkett Refresher increases the gloss level and shine of the floor and gives it a completely new appearance.

Working method: First clean your wood flooring, using a damp-mop to remove dirt and dust. Apply a thin layer of Tarkett Refresher with a clean moistened mop and leave to let dry approximately 30 minutes before using wood flooring. Do not move on wood flooring while it is getting dried. A thin layer of Tarkett Refresher is now protecting your wood flooring. If wood flooring has been treated with wax or polish products before, first clean with special cleaning liquids for polish.

Dilution: Please, do not dilute or use any additional chemicals. For excess dirt apply more Tarkett Refresher and rub harder. Please, do not go back over areas that have started to dry. Clean the mop frequently with water when applying and after use. Guideline for using Tarkett Refresher: It is recommended that Tarkett Refresher should be **used once a month**.





## For oiled products

For Tarkett products with oiled surface (Tango Vintage, Tango Classic, and Salsa Premium) we recommend OSMO line for cleaning and maintenance.



**OSMO WASH AND CARE**  
Regular cleaning for oiled parquet



**OSMO LIQUID WAX CLEANER**  
Occasional intensive cleaning for oiled parquet



**OSMO POLYX-OIL**  
Protection preservation and renewal for oiled parquet




For more info about care and maintenance,  
please visit OSMO official page:  
[www.osmo.de](http://www.osmo.de)

For partial repairing,  
please apply:

**1** Recommended  
base-oil  
(colored) for  
that particular  
design

**2** Finish-oil: clear,  
semi-matt,  
hard-wax oil  
3065 (same for  
all designs)

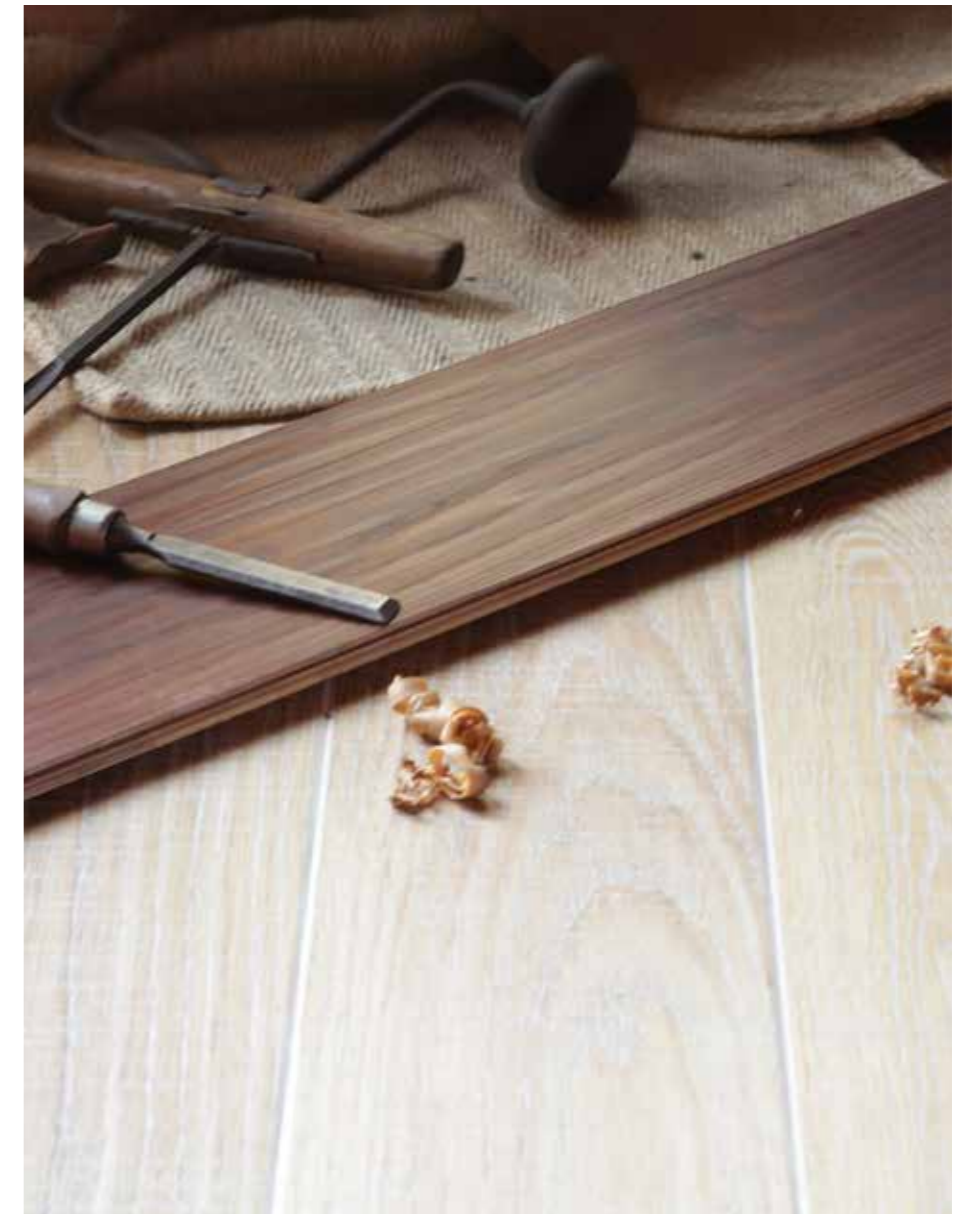





## Installer's TIPS and ADVICE

We strongly recommend you to follow Do and Don't lists and play by our unique Installation rules.

Do and don't list:

1. DO - Store in a dry place, being sure to provide at least ten centimeters air space under cartons which are stored upon concrete floors. Flooring should not be delivered until the building has been enclosed with windows, doors are in place, and cement work, plastering and all other "wet" work is completed and dry.
2. DO - Installation must be in strict accordance with the instructions and recommendations found in the Tarkett installation instructions guide. Commercial installation of Tarkett wood residential wood flooring and wood flooring installed in full bathrooms with a shower or tub are not covered by warranty.
3. DO - It is the installer/ owners' responsibility to ensure that the jobsite conditions and jobsite subfloor are environmentally and structurally acceptable prior to the installation of any hardwood flooring – permanent air conditioning and heating systems should be in place and operational (the installations site should have a consistent room temperature of 18 – 27°C and humidity of 30 – 60% for 14 days prior to and during installation and until occupied).
4. DON'T - Do not raise or lower temperature of subfloor radiant heat system by more than 2.8°C per day when turning system on and off. The wood surface temperature must never exceed 27°C.
5. DON'T - Beech and maple floors installed over a radiant-heated slab are not covered by this warranty.
6. DO - Protect the floor when moving furniture or heavy objects. Use a mat turned upside down with a slightly smaller piece of plywood on top of it. Place furniture on top and slide it.
7. DO - Move your carpets and furniture occasionally and use a minimum number of light sources to keep color changes uniform.
8. DO - Maintenance must be in strict accordance with the instructions and recommendations found in the Tarkett Care and Maintenance Guide. Only Tarkett recommended cleaning and maintenance products are appropriate for use on our products.
9. DON'T - Do not clean or wet mop your floor with water. This can permanently damage the wood flooring.

Installation and maintenance rules:

1. RULE - LEVEL/FLAT—Within 3 mm in 2.5 m and/or 1,2 mm in 1 m. Sand high areas or joints.
2. RULE - Concrete subfloors must be a minimum of 30 days old before testing begins. Moisture content of the subfloor must be less than 2% measured by CM method.
3. RULE - Floor boards should be opened just before the installation, and all boards from opened cartons must be installed before some pauses.
4. RULE - When installing 1-strip products, floor should be installed from several cartons at the same time to ensure good colour and shade mixture.
5. RULE - Assure a uniform final appearance. Install these boards adjoining the mouldings.
6. RULE - Wood is a living material, which means that a floating wood flooring will expand or contract, despite the multilayer construction design, depending on how the indoor climate changes through the year. Therefore, you must leave a space (called an expansion gap) of at least 1.5 mm per meter width of floor, minimum 8-10 mm, between floor and wall around the whole room.
7. RULE - Be attentive to staggering the ends of the boards at least 50 cm in adjacent rows. This will help ensure a more favourable overall appearance of the floor.
8. RULE - Please, EXAMINE all of this flooring BEFORE installing this material. CAREFULLY EXAMINE this merchandise for color, finish, quality and style order BEFORE installing this material. Wood flooring installed with visible defects is not covered under warranty and Tarkett declines responsibility for any costs incurred when board(s) with visible defects have been installed.
9. RULE - If the last row of boards will be narrower than 5 cm or if the wall is not straight, the first row of boards should be cut.
10. RULE - The wood subflooring materials must not exceed 10% moisture content.

## Is it possible to REPLACE DAMAGED BOARD?

Yes. One of the numerous advantages of prefinished wood floorings is how easy it is to replace a damaged board. Replacing damaged floor boards is quick, clean and inexpensive compared to in depth sanding and finishing. It only takes about 15 to 20 minutes per board, which is why we suggest keeping a few boards on hand after installation.



**Picture 1:** In case of serious damages of your wooden floor (scratches, or damages resulting from impact of heavy or sharp objects), the easiest and the most efficient way to repair it is to change damaged board.



**Picture 2:** Change of damaged board is done in following way: First cut off the board with circular saw, but be sure that you set the sawing depth max. as thickness of wood flooring (in this case 14 mm). After that saw a "V" from each corner, and then saw from short end to short end to connect these "V" cuts.



**Picture 3:** Remove the center section from the board. To be sure not to damage the neighbouring boards, use a chisel and manually extend the cut all to edges of neighbouring boards.



**Picture 4:** Remove the short ends, and then remove the long sides which are connected with neighbouring boards.



**Picture 5:** Vacuum carefully all wood dust and smaller wooden parts, to make area free and prepared for laying new board.




**Picture 6:** The new board that will be installed, must be prepared first. After you checked the board size, saw off the underside of the short ends and long side, but be careful not to damage top surface and not to remove board tongue.



**Picture 7:** Preparation of layers is done by spreading glue on a thin laminated foil, or on a piece of veneer, first spreading the glue on veneer below the neighbouring boards, and after that spreading glue on a part of veneer which should fix the new board.



**Picture 8:** After that spread the glue on a free profile of neighbouring boards and on tongue on board.



**Picture 9:** Install the board.



**Picture 10:** Use weights to press it down for at least three hours, to be sure that the board is well fixed – glued on neighbouring boards.





## Frequently asked QUESTIONS

### • In what rooms can I install Tarkett wood flooring?

Tarkett wood flooring is suitable for interior residential applications from hallways through kitchen to bedroom and living room areas. Basically, Tarkett wood flooring is perfect anywhere in your home except around bathtubs and shower areas. Wood flooring throughout your home can add warmth, flow harmony and natural beauty to your home combined with extraordinary quality.

### • How long does wood flooring take to install?

Installation usually can be completed within one day and the floor is ready to use immediately. NOTE: Our factory certified and thoroughly trained technicians make installation a snap. Consult store personnel for an installation appointment that will fit your schedule.

### • Will I need to measure where the floor is to be installed?

No. An installer will measure your home for you and will provide a written proposal at no obligation to you.

### • What does it cost to install a Tarkett wood flooring?

The estimate will detail all labor charges and Tarkett brand accessory costs (molding profiles, floor cleaners etc.). If you comparison shop the total installed price with other stores' prices, you will find that Tarkett's Independent Dealers offer you the best package, service and value for money.

### • What do I need to do to prepare for my wood flooring installation?

To ensure the smoothest installation possible, you should do the following things:

- Remove all breakables like china, porcelain figurines, collectibles etc.
- Strip the beds
- Detach any wiring such as power cords for TVs, stereos and computers.
- Installers will usually move your furniture, but cannot assume responsibility for any damage incurred while doing so.

### • What is my responsibility regarding wood floor installation (with or without assistance of installer)?

We urge you as the final inspector to inspect for proper color, finish, style and quality of your wood floor PRIOR to installation. Hold out pieces that may not be acceptable one installed.

### • Should I be aware of any special conditions?

It is important that moisture and humidity are controlled in all indoor environments and that applies especially to your home. Architects recommend a humidity range between 30 and 60% and temperature of at least 18°C for all interiors before, during and after installation. It is the Installer/Owner responsibility to ensure that the conditions are acceptable prior to the installation of the wood flooring. The manufacturer declines any and all problems with the hardwood flooring that are related to or attributed to improper jobsite conditions.

### • Do I need to plan installation direction?

If the room is fairly square, the length of the boards should run parallel to the incoming light.

### • How to install wood flooring in hallways?

In long, narrow rooms such as hallways, it is best to install the boards along the length of the room.

### • Over what surfaces can Tarkett wood flooring be installed?

Tarkett factory trained installers will put your home through a thorough inspection process. Surfaces such as concrete and old floor coverings (except carpet) are perfect subfloors for high performance products to be installed over. In each case, the subfloor must be sound, level and dry and must meet the requirements in the Conditions section above. This is for floating type of installation.

### • Is it possible to install Tarkett wood flooring over a radiant heated slab?

No problem. Tarkett wood flooring qualify for installation over properly installed radiant heated floors. These floors, however, must have a moisture barrier installed. The heating system must not have „hot spots“ that exceed 27°C – an even temperature

not exceeding 27°C is required throughout the room. Also, beech and maple floors are not suitable for installation over radiant heat.

### • How to maintain different wood flooring?

Light colors will show dirt and require more frequent maintenance than dark colors. Walnut, beech and cherry are inherently smooth hardwood and will show scratches and dents more readily than oak. You should consider these facts when making your flooring selection (see Brinell test table - hardness of the wood species).

### • Is it possible to refinish your Tarkett wood flooring?

Yes. Despite its long lasting exclusive finish, your floor will naturally show signs of wear after years of use. In most cases, the finish can be easily restored with a simple application of quality waterbased varnish, compatible with the original Tarkett finish. This type of refinishing is simple and economic compared to in depth sanding. You have the option of refinishing the whole floor or just part of it. Ensure that the new gloss level is the same as that of the original finish.

Refinishing steps:

1. Floor must be clean and free of residue and grease.
2. Sand floor surface lightly and evenly with a synthetic scrub pad in order to obtain a uniform finish without damaging the stain of the wood, and to prepare surface for application of the new varnish.
3. Vacuum and damp mop floor to remove dust.
4. Apply primer before the application of the varnish according to manufacturer's recommendations.
5. Apply two coats of varnish.

### • Is it possible to refinish Tarkett wood flooring several times?

Yes. Your floor may be refinished many times. However, if you wait too long before refinishing, the varnish may be completely worn off, causing damage to wood and requiring in depth sanding. Frequency of refinishing varies according

to traffic flow and maintenance. See your Tarkett certified installer to evaluate the overall condition of your floor and have the work done. He can advise you concerning which type of varnish to use, required drying time and ease of application. Depending upon the time of year or the state of your floor, it may be a good idea to wait awhile before going ahead with your project.

Note: Remember that varnish is used to protect your floor, not to harden its surface.

### • Can I change the color of Tarkett wood flooring?

Yes. Another great advantage of a Tarkett wood prefinished floor is that you can change its color or refinish it like new after considerable wear. Deep sanding will eliminate the micro V joint and uncover the wood's natural color. Simply apply a new stain and revarnish with 3 or 4 coats of water based varnish.





## Nice and healthy future

Beauty always inspires, though human spirit and knowledge refine this inspiration. Wood represents one of the most beautiful and appreciated natural materials. Using wood in wood flooring industry leads to big quantities of unused waste. Since forests represent a priceless treasure of the world, Tarkett's multilayer wood flooring construction is made of approximately 75 % soft wood that comes from forests which have a positive net growth of timber. Tarkett Collections are a connection between beautiful gifts of nature and the best technology that improves and saves their natural performances. Wood used from certified forests and other materials used in production comply with the highest environmental standards. Our company constantly cares about future. By choosing our wood flooring, you invest in beauty that will enrich your life space and create a safe environment for you and your family.

FOLLOW US ON  
PAGES



Tarkett Parquet  
for iPhone



Tarkett Parquet  
for Phones

■ SERBIA: Tarkett SEE, Industrijska zona bb, 21400 Bačka Palanka, Phone: +381 21 7557 649, Fax: +381 21 7557 637, [www.tarkett.rs](http://www.tarkett.rs) ■ ROMANIA: Tarkett SEE, Willbrook Platinum Business & Convention Center, 172-176 Bucharest - Ploiest Road, Building "A", 3 rd floor, 013697 Bucharest, Sector 1 Romania, Phone: +40 21 224 0124, [www.tarkett.ro](http://www.tarkett.ro) ■ BULGARIA: Tarkett SEE, Bul. Evlogi Georgiev 39, 1142 Sofia, Phone: +359 2 986 7988, Fax: +359 2 986 7987, [www.tarkett.bg](http://www.tarkett.bg) ■ CROATIA: Tarkett SEE, Buzinski prilaz 10, 10 000 Zagreb, Phone: +385 91 444 1520, [www.tarkett.hr](http://www.tarkett.hr) ■ BOSNIA AND HERZEGOVINA: Tarkett SEE, Jovana Dučića 74, 78000 Banja Luka, Phone: +387 65 770 565, +387 65 402 221, [www.tarkett.ba](http://www.tarkett.ba)

[www.tarkett.rs](http://www.tarkett.rs)



THE ULTIMATE  
FLOORING EXPERIENCE