



FLOOR IS THE NEW PLAYGROUND



iD Tilt

Get tough with iD Tilt, the floor designed to meet your high traffic commercial and industrial needs. Even in heavy-traffic areas, flooring designs and layouts can enhance pathways or zoning and still be playful.

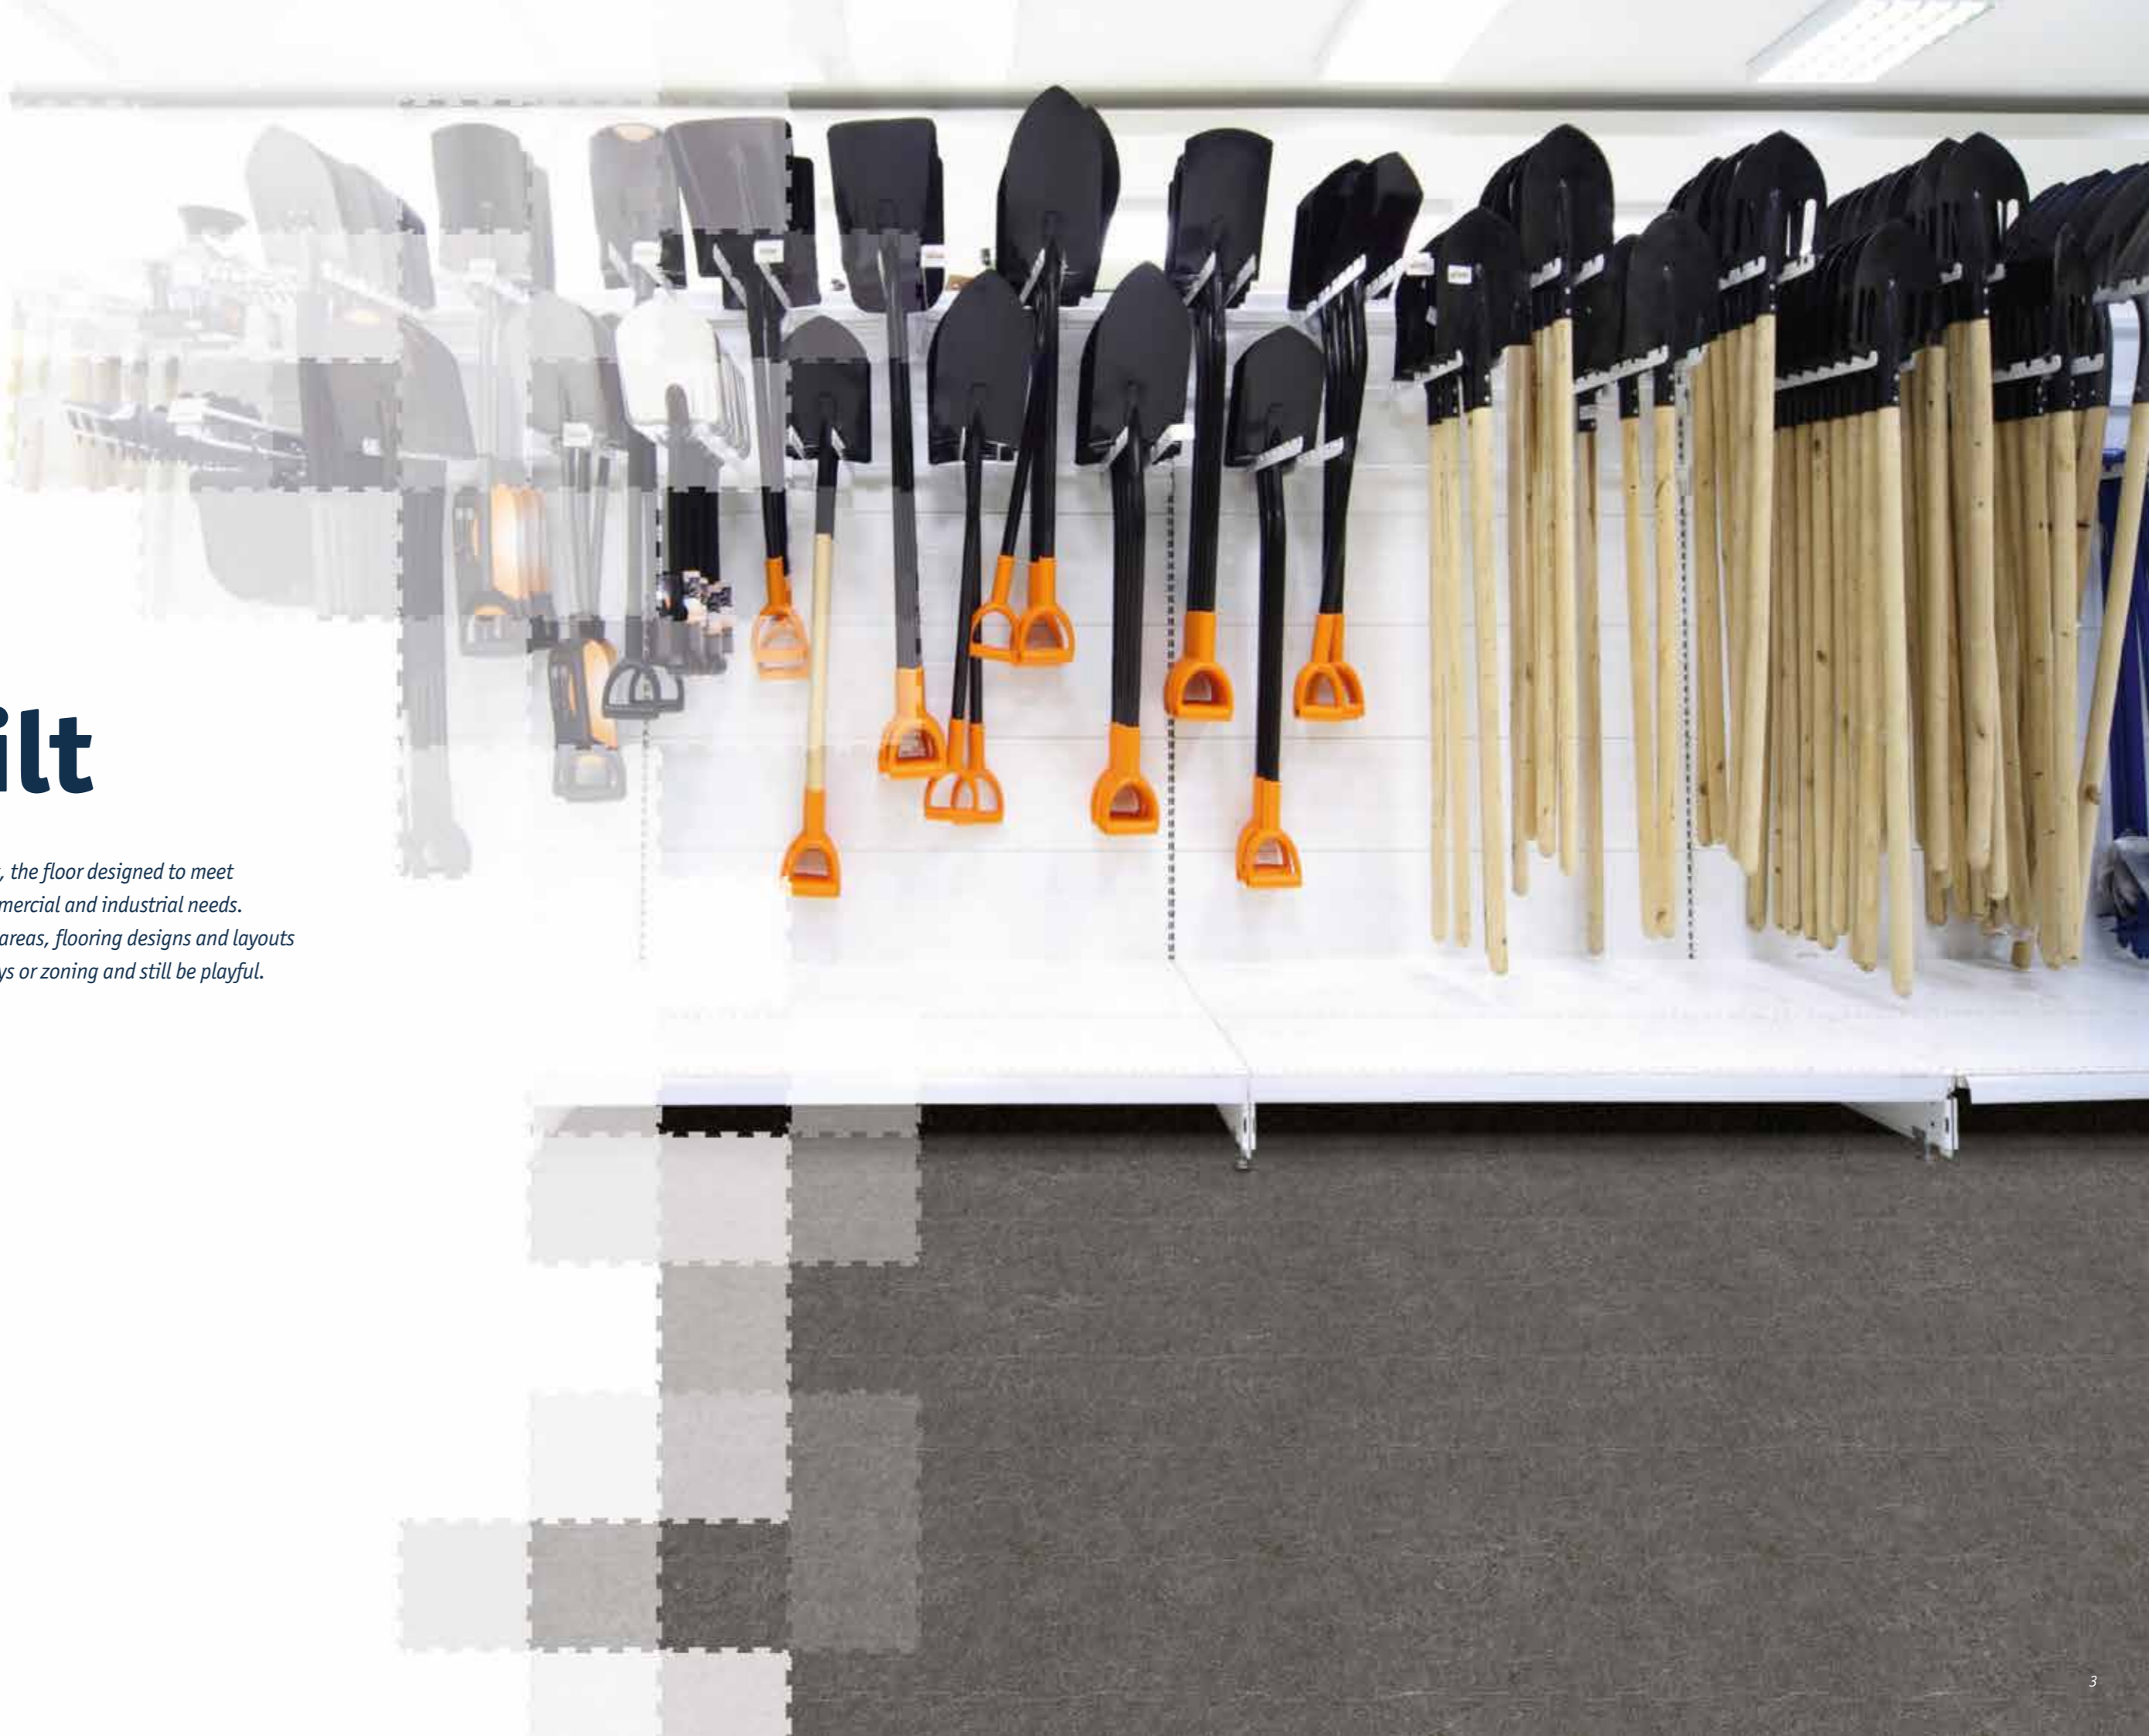

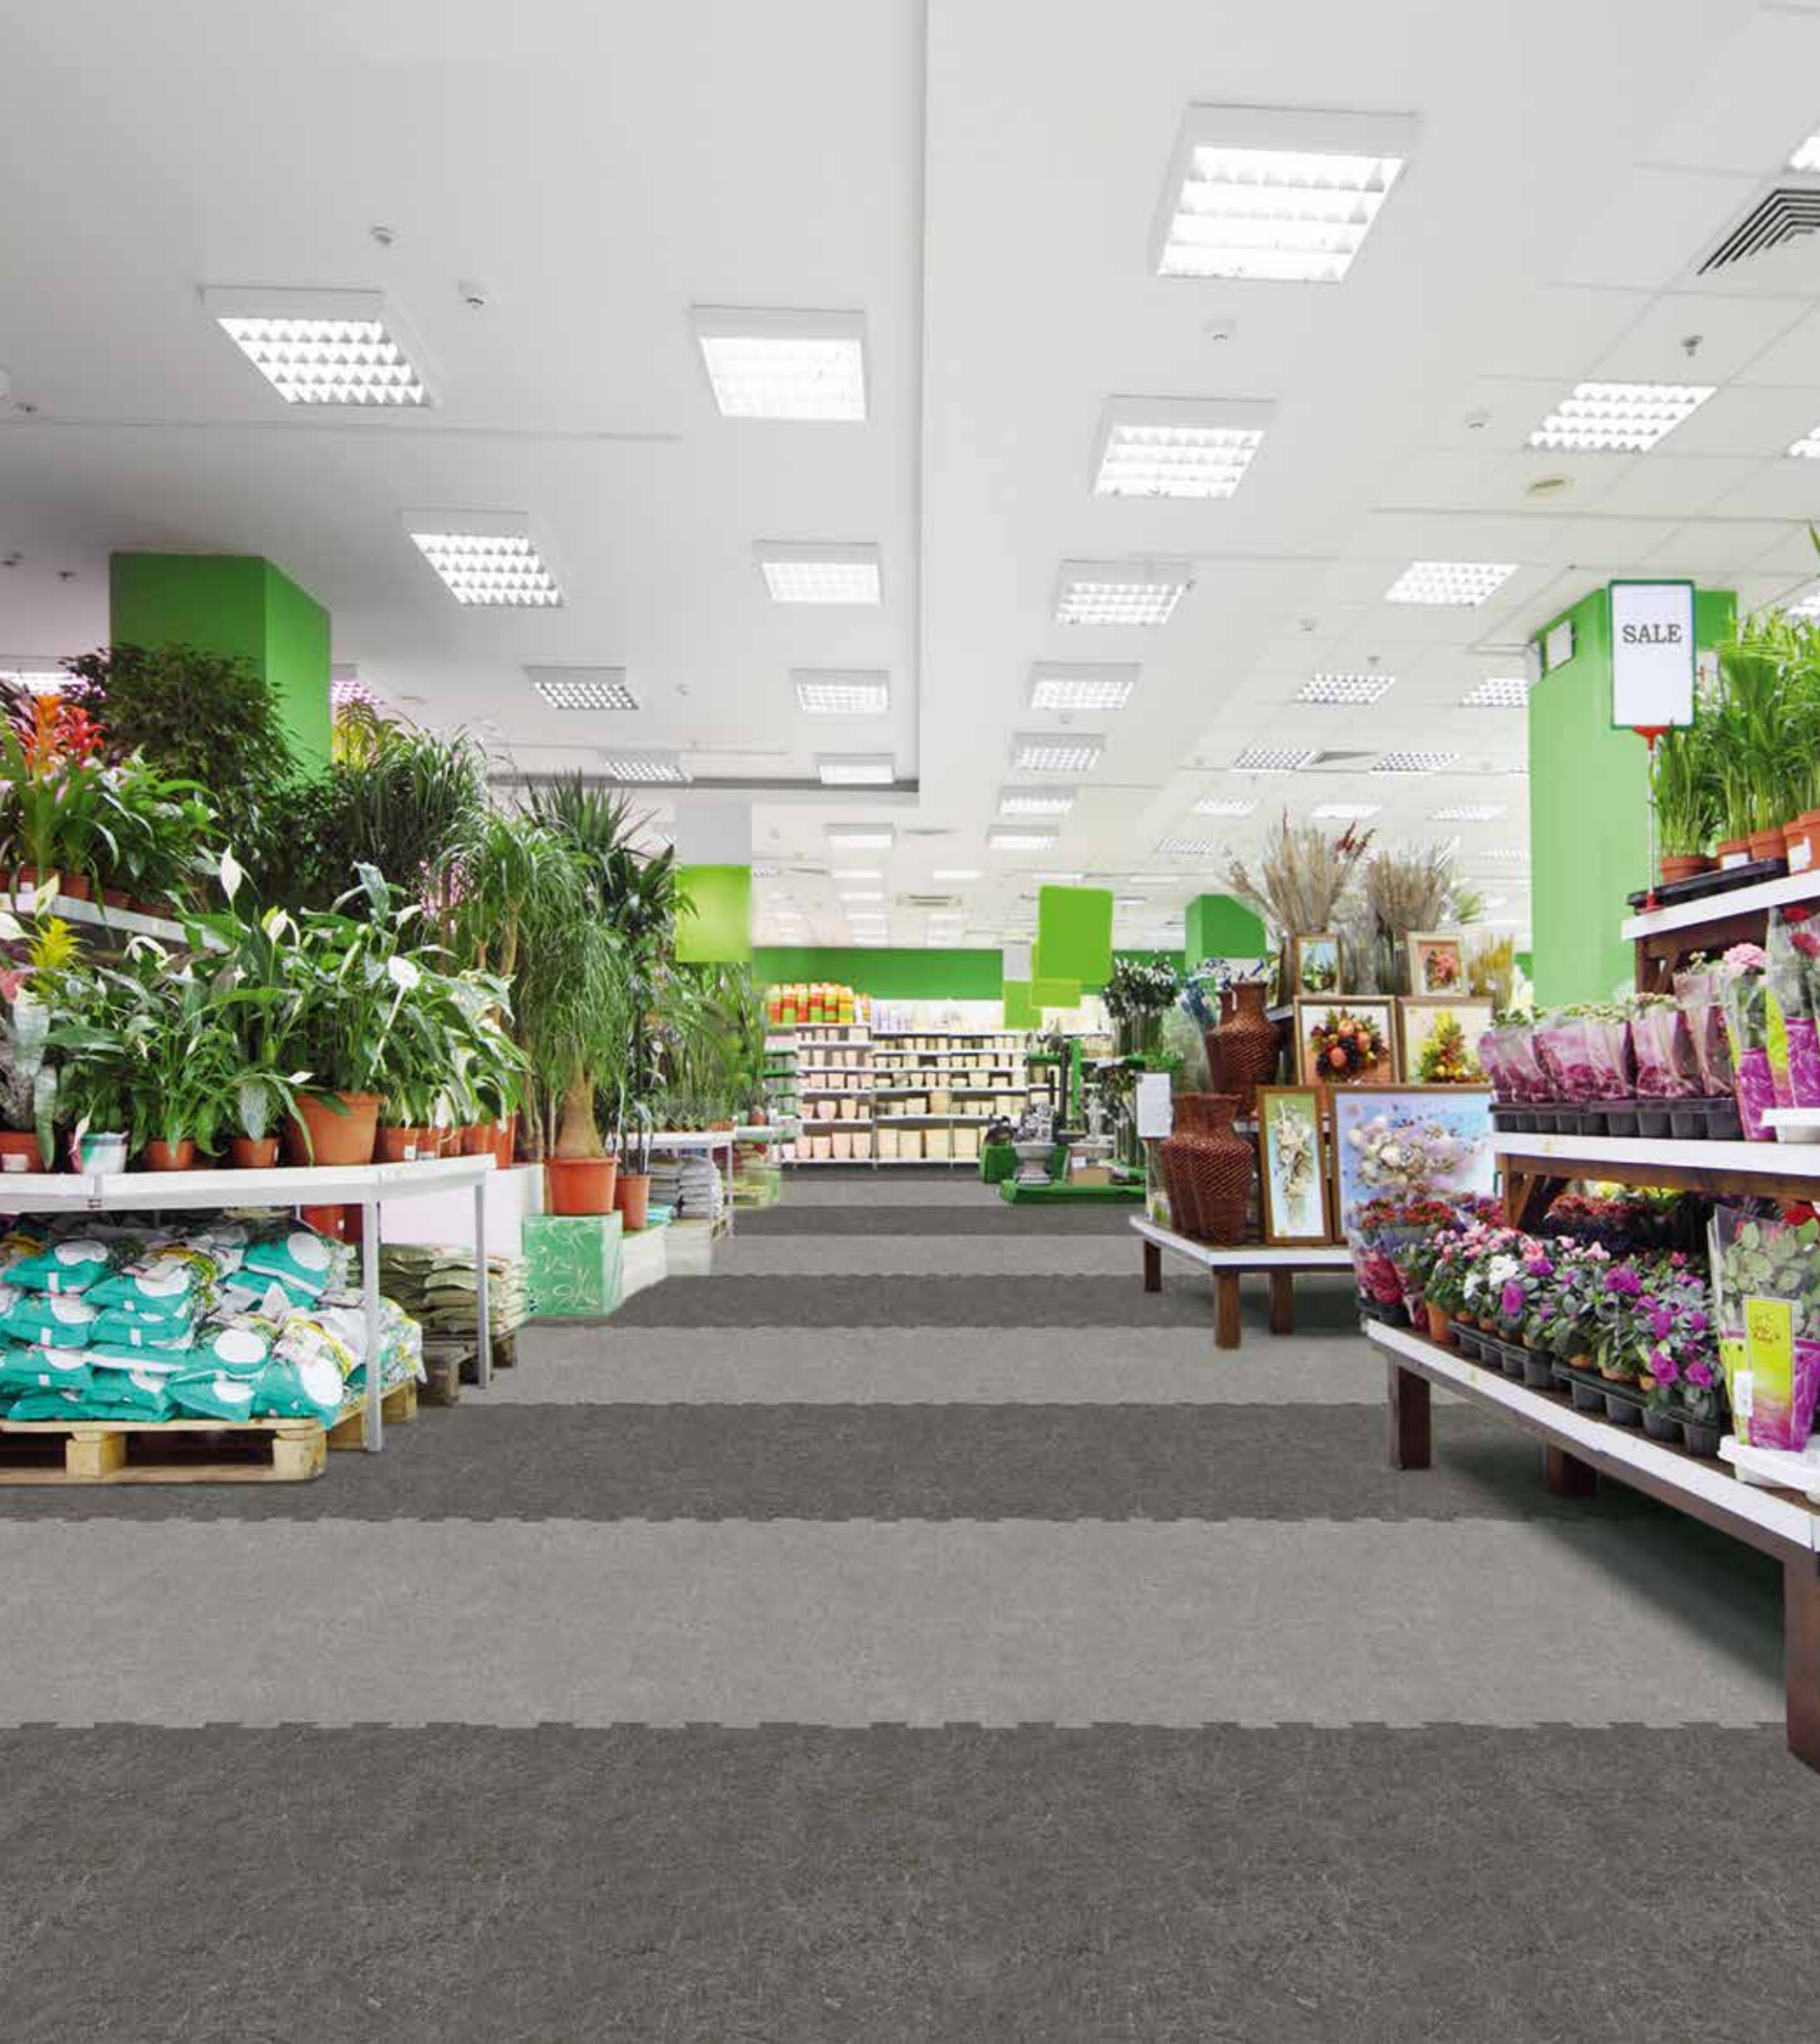

iD Tilt

Make distinctive design an easy order by playing with colours and layouts.



GIANT LINES

2 colours - Buy 1/2 of Grey, 1/2 of Dark Grey*

Uses models:
Concrete - Grey (001)
Concrete - Dark Grey (002)

Tile format (cm): 45.72 x 45.72



DASHES

3 colours - Buy 1/3 of each colour*

Uses models:
Concrete - Grey (001)
Concrete - Dark Grey (002)
Concrete - Beige (000)

Tile format (cm): 45.72 x 45.72



GRADIENT CODE

3 colours - Buy 2/5 of Grey, 1/5 of Dark Grey and 2/5 of Beige*

Uses models:
Concrete - Grey (001)
Concrete - Dark Grey (002)
Concrete - Beige (000)

Tile format (cm): 45.72 x 45.72



GRADIENT CODE 2

3 colours - Buy 1/4 of Grey, 2/4 of Dark Grey and 1/4 of Beige*

Uses models:
Concrete - Grey (001)
Concrete - Dark Grey (002)
Concrete - Beige (000)

Tile format (cm): 45.72 x 45.72


* Estimation based on this scaled square pattern

GRANITE




GRANITE - TRAFFIC RED RAL 3020

4697 006
91.44 x 91.44 cm

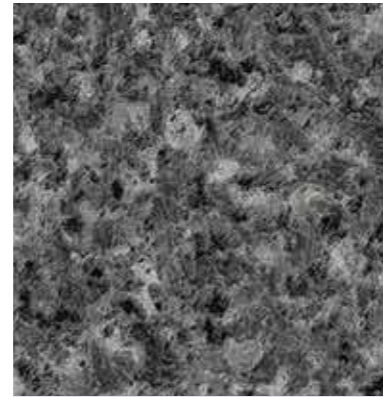

GRANITE - BLACK

4697 004
91.44 x 91.44 cm

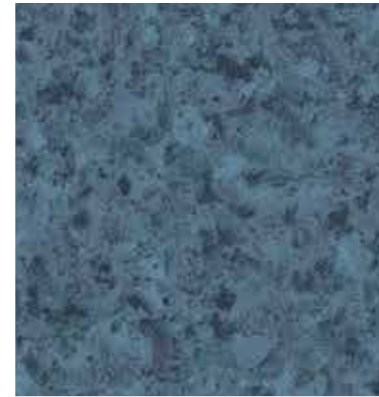

GRANITE - TRAFFIC BLUE RAL 5017

4697 007
91.44 x 91.44 cm



GRANITE - GREY

4697 005
91.44 x 91.44 cm

CONCRETE



CONCRETE - DARK GREY

24750 002
45.72 x 45.72 cm




CONCRETE - GREY

24750 001
45.72 x 45.72 cm



CONCRETE - BEIGE

24750 000
45.72 x 45.72 cm

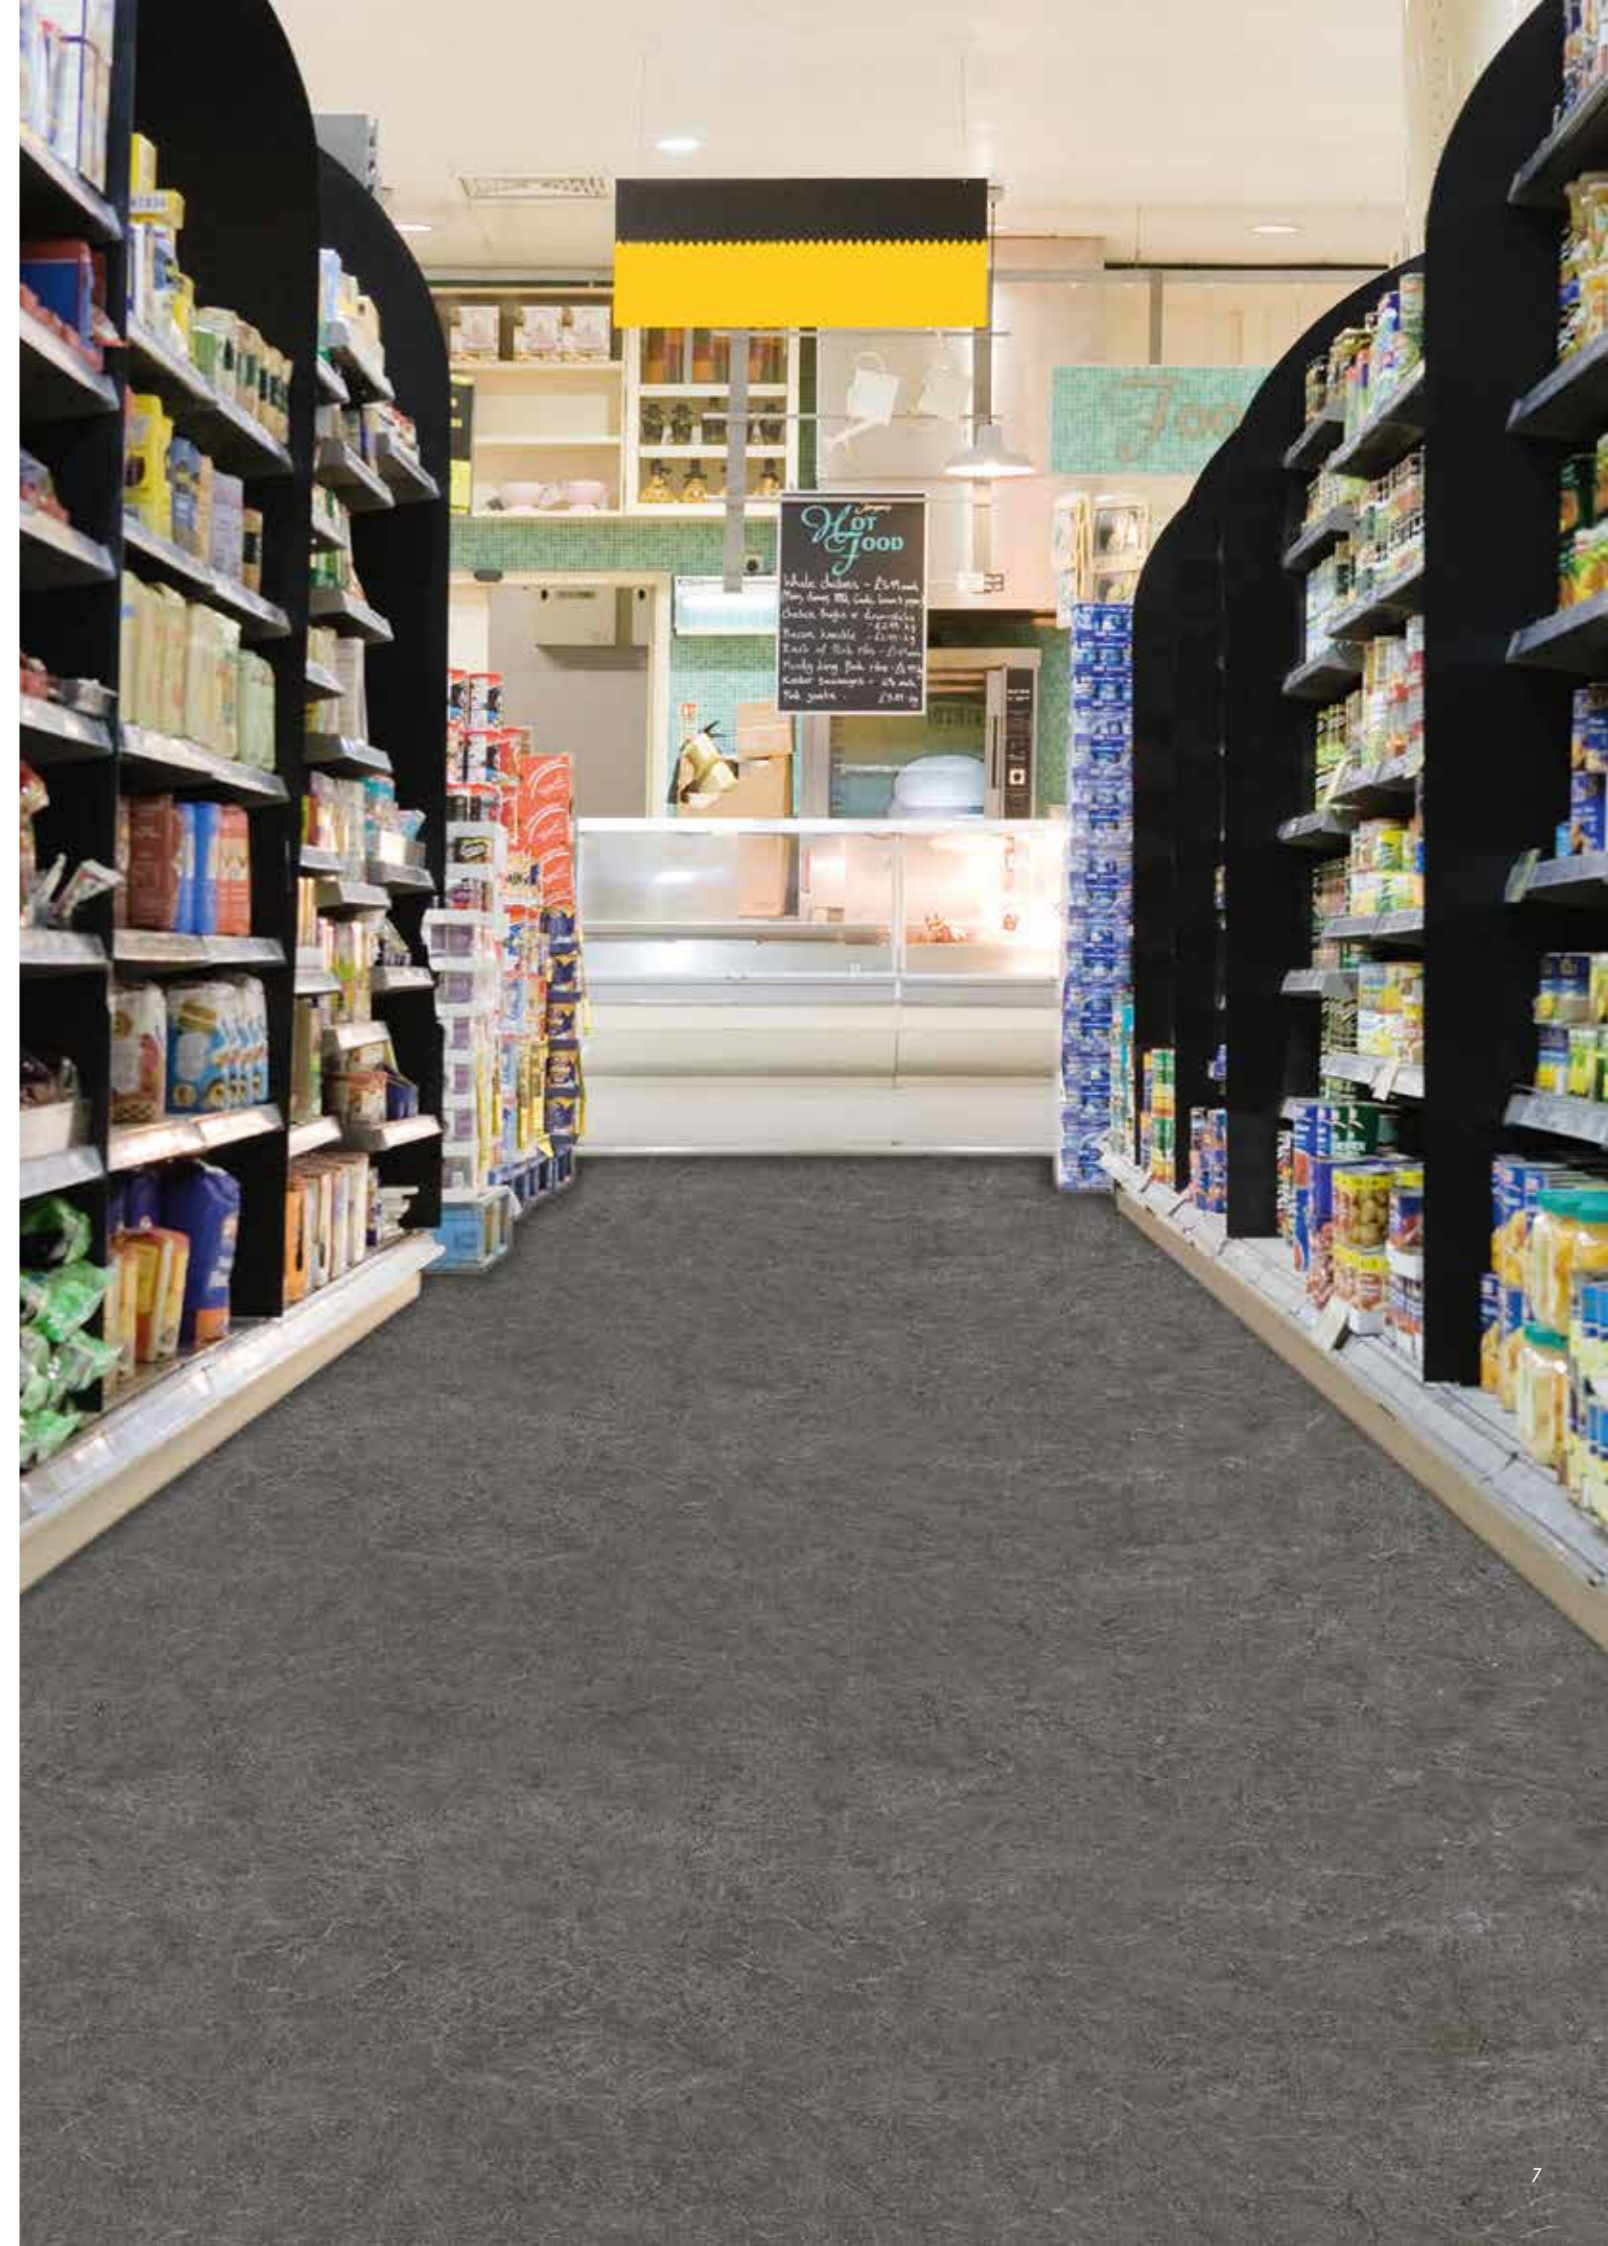

iD Tilt

iD TILT is Tarkett's floating floorcovering solution designed for commercial or industrial applications in both new builds and renovation projects. Easy to install, it keeps installation time to a minimum and iD TILT also reduces business losses due to construction downtime. Good value for your money, iD TILT saves you time and is an invaluable cost-saver on any construction project.

EASY TO INSTALL

- Limited subfloor preparation = time saved: 20% quicker than glue-down products
- No glue required = cost & time savings: 10% lower installation costs
- Your floor immediately available for use = no loss of business: overnight installation

EASY TO MAINTAIN


- Easy to remove & to renovate
- No damage to subfloor
- Easy to clean: TopClean XP™ surface treatment

HELPS DEFINE SPACES

- Create shop in shop corners and demo areas
- Directional signage
- Divide areas

A SOLID CONSTRUCTION

- Suitable for high traffic areas
- Very resistant interlocking system
- Clean appearance
- Long-lasting Performance

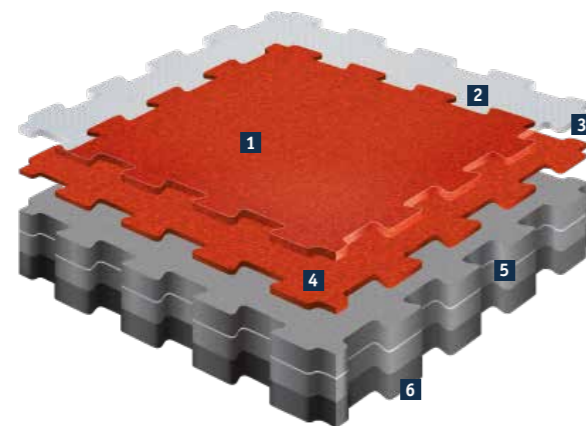

1. TopClean XP™ PUR reinforcement
extreme resistance and easy low cost maintenance


2. Surface embossing
for better non slip properties

3. Pure PVC transparent wear layer
Exceptionally hard wearing and indentation resistant

4. Design film
7 design options

5. Core layer with glass fiber reinforcement
excellent dimensional stability and resistance to tear and indentation

6. Balancing layer
for a curl-free product

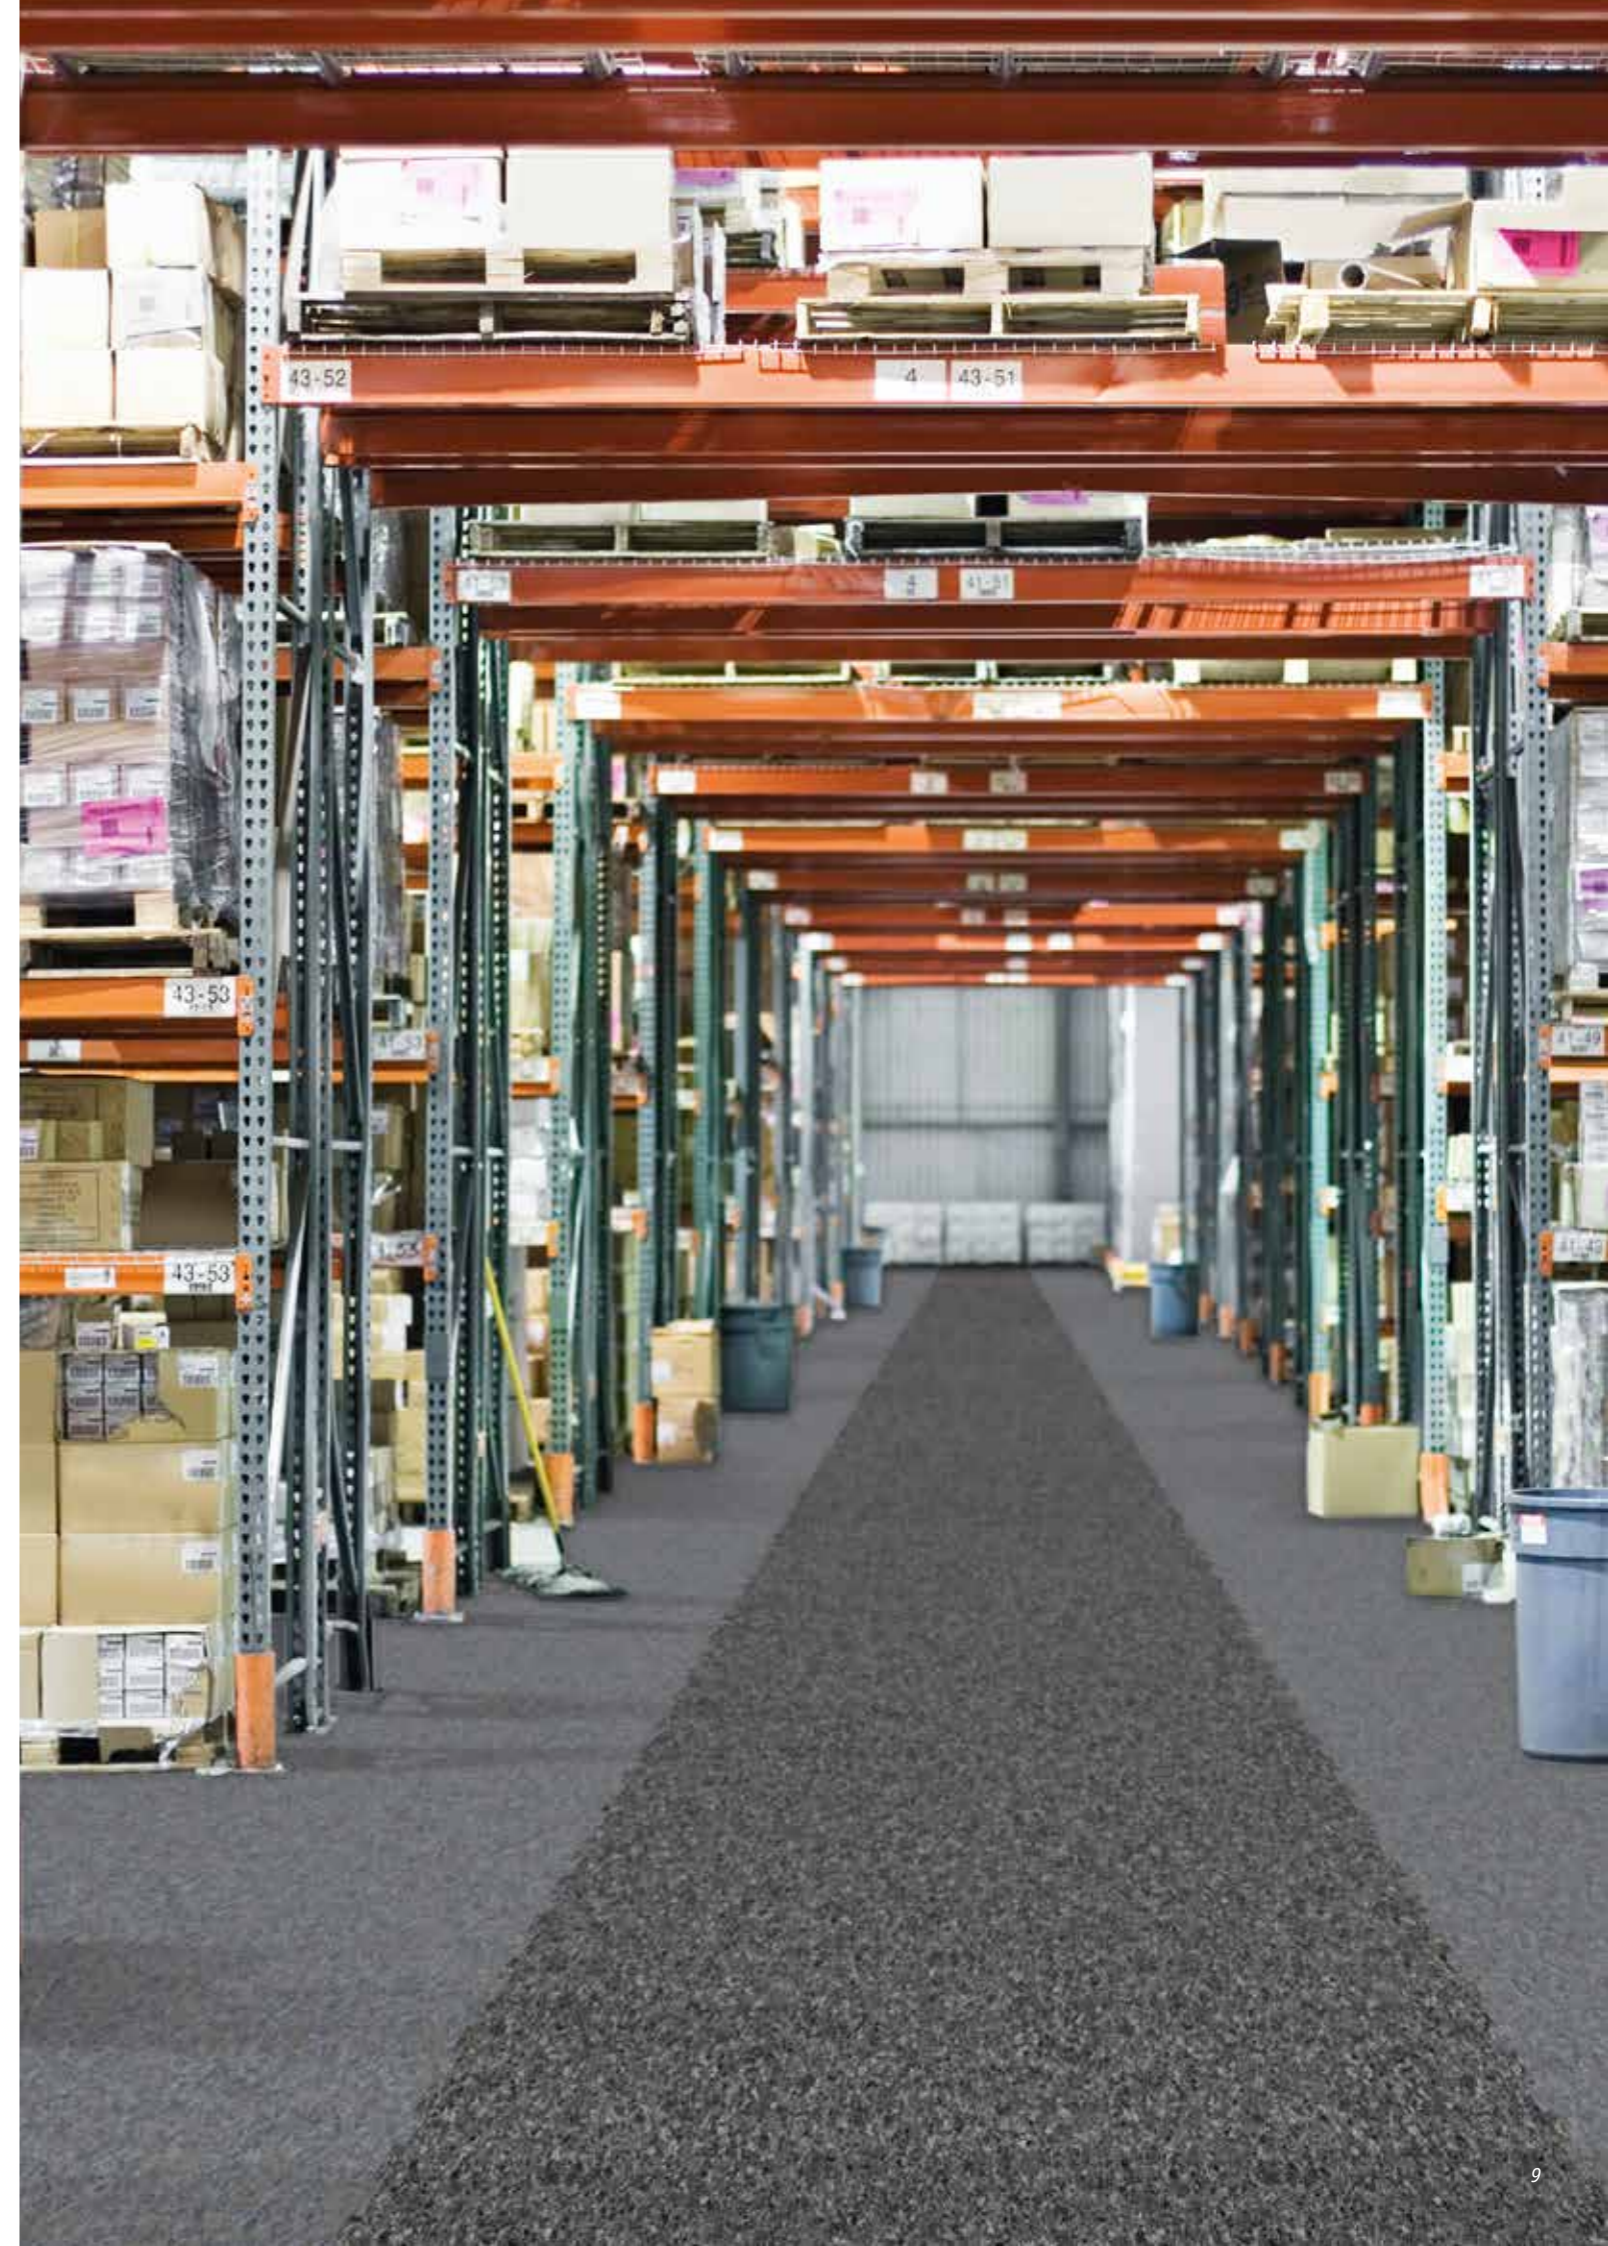



Accessories

Skirting



WALL BASE DECORATIVE SET-ON SKIRTING

Compact PVC skirting foreseen with decorative film and PUR treatment. To be glued.

2 colours:  Ref.: White 26640 500
 Ref.: Aluminium 26640 501
 Delivery Form: 16 units of 2.5 lm

Profile




FLEXIBLE PROFILE

Aluminium stop profile, to be screwed. Available in Silver (1456 011) and Stainless Steel (1456 012) finishes.



TRANSITION PROFILE

Aluminum transition profile, to be screwed. Available in Silver (1451 011) and Stainless Steel (1451 012) finishes.

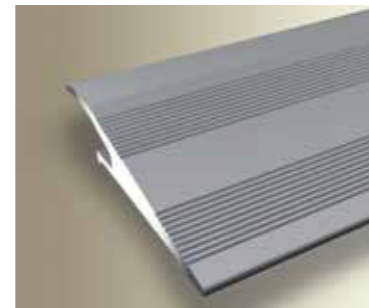

RAMP PROFILE


Aluminium ramp profile, to be screwed. Available in Silver (1456 011) and Stainless Steel (1456 012) finishes.

Accessibility



WARNING TILE

Helps recognize a change in level, in accordance with regulatory requirements for disabled access and safety. Various formats available. Self-adhesive or to be glued to the floorcovering (according to product).



Self-adhesive rectangular tiles
Format: 815 x 420 x 8mm
Ordering unit: 1 box of 6 tiles

Self-adhesive square tiles
Format: 450 x 420 x 8mm
Ordering unit: 1 box of 20 tiles

	Self-adhesive	
	Rectangular tile	Square tile
White	1440 350	1440 450
Grey	1440 351	1440 451
Black	1440 352	1440 452
Ivory	1440 353	1440 453
Red	1440 354	1440 454
Yellow	1440 355	1440 455



3D STUD

Ready-to-use podotactile studs to be simply fitted on top of the existing floorcovering.

Format (stud): 5 x 25mm
Ordering unit: 1 box of 200 studs

	Self-adhesive
White	1440 050
Grey	1440 051
Black	1440 052
Ivory	1440 053
Red	1440 054
Yellow	1440 055

Specification


Modular heterogeneous product with interlocking connection.
Product standard: ISO 10582.

CERTIFICATION & CLASSIFICATION	STANDARDS	Tilt
Type of floor covering	EN ISO 10582	Modular heterogeneous product with interlocking connection
CE certification	EN 14041	Yes
Classification	EN ISO 10874 - EN 685	Commercial: 34 Industrial: 43
TECHNICAL CHARACTERISTICS	STANDARDS	Tilt
Total thickness	EN ISO 24346 - EN 428	5.0 mm
Wear layer thickness	EN ISO 24340 - EN 429	0.70 mm
Surface treatment (PUR)		Yes
Total weight	EN ISO 23997 - EN 430	7400 g/m ²
Wear layer binder content	ISO 10582	Type I
Form of delivery	EN ISO 24342 - EN 427	
	Tiles	91.44 x 91.44 cm (Granite) 3 tiles/box (= 2.51 m ² - 20.10 kg) 45.72 x 45.72 cm (Concrete) 10 tiles/box (= 2.09 m ² - 16.70 kg)
TECHNICAL PERFORMANCES	STANDARDS	Tilt
Dimensional stability	EN ISO 23999 - EN 434	< 0.15 %
Reaction to fire	EN 13501-1	B _{f1} -s1 over concrete substrate
Residual indentation	EN ISO 24343-1 - EN 433	< 0.10 mm
Furniture leg	ISO 16581 - EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Curl resultant to heat	ISO 23999 - EN 434	≤ 2 mm
Thermal resistance	EN ISO 10456	approx. 0.05 m ² K/W
Impact sound reduction	EN ISO 717-2	ΔL _w = 6 dB
Light fastness	EN ISO 105-B02	≥ 6
Resistance to chemicals	EN ISO 26987 - EN 423	Resistance
Slip resistance	EN 13893 DIN 51130	μ ≥ 0.30 DS R9
Electrical properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 109 Ω
Colours		Granit: 4 - Concrete: 3

Technical data in force upon the date of publication (11/15). The values correspond to laboratory tests (no in situ test) and are subject to modification. Tarkett's instructions regarding installation, cleaning and maintenance shall be observed. Please contact your local sales rep. for these instructions.

CUSTOMS TARIFF: 482050000000F

Our Sustainability tag explains the content of our products and how they contribute to our sustainability strategy and human well-being.



The 2 formats are not interconnectable

FLOOR IS THE NEW PLAYGROUND

flooristhewnewplayground.tarkett.com

■ **WESTERN EUROPE:** Austria: Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 ■ Belgium: Tarkett France Belux – Tel. +32 16 35 98 80 ■ Denmark: Tarkett A/S – Tel. +45 43 90 60 11 ■ Finland: Tarkett Oy – Tel. +358 9 4257 9000 ■ France: Tarkett SAS – Tel. +33 1 41 20 42 49 ■ Germany: Tarkett Holding GmbH, Bereich Objekt – Tel. +49 62 33 810 ■ Greece: Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340 ■ Italy: Tarkett S.p.A. – Tel. +39 0744 7551 ■ Luxembourg: Tarkett GDL SA – Tel. +352 949 211 8804 ■ Netherlands: Tarkett Holding GmbH, Vestiging Nederland – Tel. +31 76 57 80 760 ■ Norway: Tarkett AS – Tel. +47 32 20 92 00 ■ Portugal: Tarkett SA – Tel. +351 21 427 64 20 ■ Spain: Tarkett Floors S.L. – Tel. +34 91 358 00 35 ■ Sweden: Tarkett Sverige AB – Tel. +46 771 25 19 00 ■ Switzerland: Tarkett Holding GmbH, Bereich Objekt Schweiz – Tel. +41 043 233 79 24 ■ Turkey: Tarkett Aspen – Tel. +90 212 213 65 80 ■ United Kingdom: Tarkett Ltd – Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE:** Baltic Countries: Tarkett Baltics: Tel. +370 37 262 220 ■ Czech Republic: Tarkett France SAS, org. slozka – Tel. +420-271 001 602 ■ Hungary: Tarkett France SAS – Tel. +36 1 437 8150 ■ Poland: Tarkett Polska Sp. z o.o. – Tel. +48 22 639 31 68 ■ Russian Federation: ZAO Tarkett RUS – Tel. +7 495 775 3737 ■ Slovakia: Tarkett France SAS, org.zlozka – Tel. +421 248 291 317 ■ South East Europe: Tarkett Trade d.o.o. – Tel. +381 21 7557 649 (44) 569 12 21 ■ Ukraine: Tarkett UA – Tel. +38 (0) 44 569 12 21 ■ **ASIA AND OCEANIA:** Australia: Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 ■ China: Tarkett Floor Covering (Shanghai) Co. Ltd. – Tel. +86 (21) 60 95 68 38 ext 841 ■ Hong Kong: Tarkett Asia Pacific Ltd. – Tel. +852 2511 8716 ■ India: Tarkett France (India Branch) – Tel. +91 11 4352 4073 ■ South East Asia: Tarkett Flooring Singapore Pte Ltd – Tel. +65 6346 1585 ■ **AFRICA:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** Tarkett Middle East: Tel. +961 1 51 3363/4 ■ Israel: Tarkett International: Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA:** USA: Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. +1 440 543 8916 ■ Canada: Tarkett Inc. – Tel. +1 450 293 173 ■ **LATIN AMERICA:** Brazil: Tarkett Fademac – Tel. 55 12 3954 7108 ■ Other countries: Tarkett America Latina – Tel. +55 11 3047 7200 ■ Argentina - Chile - Uruguay: Tarkett Latam Mercosur - Tel. 54 11 48 06 74 28 / 54 9 11 44 46 88 82 ■ Colombia - Panama - Caribbean: Tarkett Latam Andina – Tel. 57 1 759 5781 / 57 312 273 1566 ■ Bolivia - Ecuador - Paraguay - Peru: Tarkett Latam Sur Oeste - Tel. 55 11 3047 7233 ■ Mexico / Central America: Tarkett Latam Mexico - Tel. 52 735 35 63 918 / 52 55 51 07 9524



THE ULTIMATE
FLOORING EXPERIENCE