

ACCZENT EXCELLENCE 70



ACCZENT EXCELLENCE 70

Budget solution
with premium qualities for
heavy traffic areas



SENSORIAL BENEFITS


- Mix of mineral design effects and wood design
- A large choice of printed and inlaid designs

FUNCTIONAL BENEFITS

- 4 sub-collections to better answer your needs
- Resistant floor to indentation & abrasion
- Low cost and easy maintenance with TopClean


ENVIRONMENTAL BENEFITS

- Sainer atmosphere

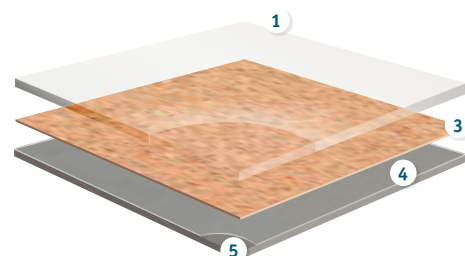

ACCZENT EXCELLENCE 70
RUBY & OPAL

- 1 Easy maintenance and very high resistance to scratches:
TopClean™ PUR reinforcement treatment
- 2 Resistance to abrasion:
0.70mm pure PVC transparent wear layer
- 3 High definition print
- 4 Superior dimensional stability ($\leq 0.10\%$):
Glass fibre non-woven reinforcement
- 5 Resistance to indentation and tearing:
Solid homogeneous calendered sheet made of recycled vinyl
- 6 PVC Backing

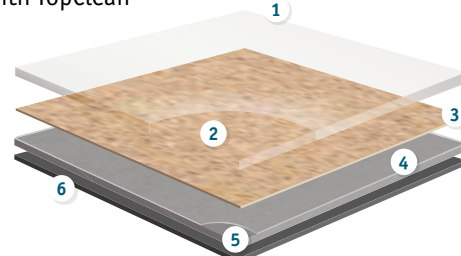

ACCZENT EXCELLENCE 70
TOPAZ & SILVER

ACCZENT EXCELLENCE 70

TECHNICAL DATA	STANDARDS	Accent Excellence 70 Topaz	Accent Excellence 70 Silver	Accent Excellence 70 Ruby	Accent Excellence 70 Opal
Classification					
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl			
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43	Classes: 34 43	Classes: 34 43	Classes: 34 43
Characteristics					
Total thickness	ISO 24346 (EN 428)	2.50mm	2.00mm	2.00mm	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	0.70mm	0.70mm	0.70mm	0.70mm
Total weight	ISO 23997 (EN 430)	2 900g/m²	2 360g/m²	3 000g/m²	3 000g/m²
PU treatment	-	TopClean™	TopClean™	TopClean™	TopClean™
Wear layer binder content	ISO 10582	Type I			
Technical performances					
Residual indentation	Average measured value	≤ 0.10mm			
	ISO 24343-1 (EN 433) requirement				
Reaction to fire	EN 13501-1	C _f -s1 glued on any derivative wood panel C _f -s1 loose-laid on any derivative wood panel	B _f S1 glued over any A2 _f or A1 _f substrate (concrete) and over any derivative wood substrate		
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30	R10 μ ≥ 0.30	R10 μ ≥ 0.30	R9 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%			
Furniture leg	EN 424	No damage			
Castor wheel test	ISO 4918 (EN 425)	No damage			
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm			
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10⁹ ohms			
Chemical resistance	ISO 26987 (EN 423)	High resistance			
Hygiene	-	Does not contribute to infection spreading			
Thermal resistance Underfloor heating	EN ISO 10456	0.02m² K/W Suitable			
Light fastness	EN ISO 105-B02	≥ 6			
Impact sound reduction	Standards EN ISO 10140-3 EN ISO 717/2	13dB	10dB	-	
Form of delivery	EN 24341 (EN 426)	approx. 24lm x 2/3/4m	approx. 25lm x 2/3/4m	approx. 23lm x 2/4m	
Colours		Click: 13 Wood: 11	8	Nature: 23 Wood: 13	Click: 13 Wood: 4

The above information is subject to modifications for the benefit of further improvement (07/2016).
For more detailed technical information, please contact Tarkett.




Download the product offer

ACCZENT EXCELLENCE 70 TOPAZ



Clic - Beige

Clic

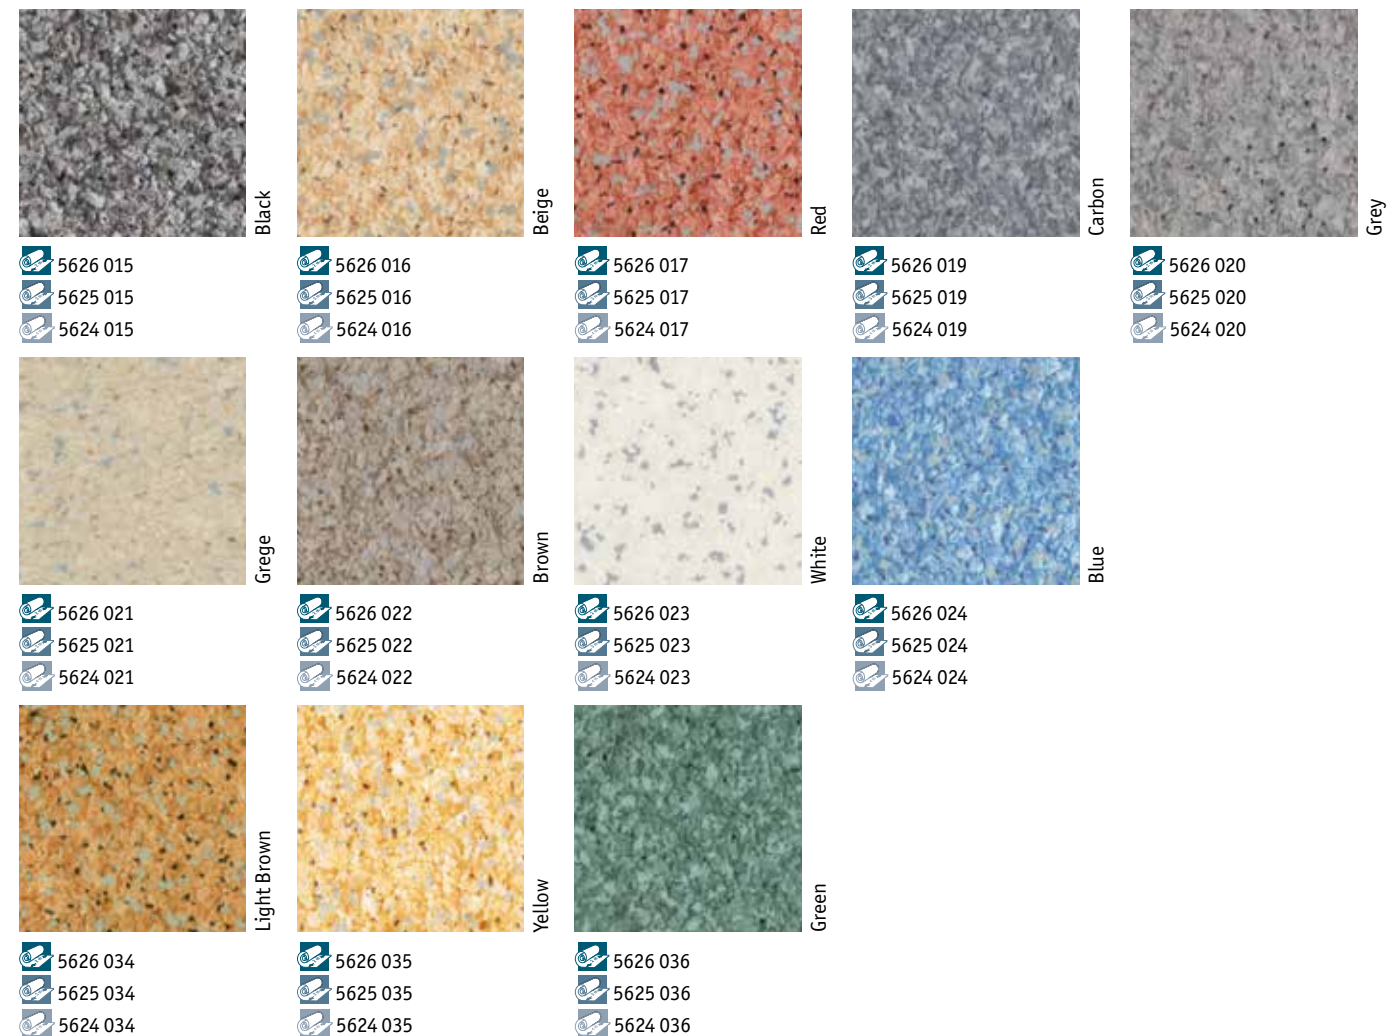

TECHNICAL DATA	STANDARDS	Acczent Excellence 70 Topaz
Classification		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.50mm
Wear layer thickness	ISO 24340 (EN 429)	0.70mm
Total weight	ISO 23997 (EN 430)	2 900g/m²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performances		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	C _{fl} -s1 glued on any derivative wood panel C _{fl} -s1 loose-laid on any derivative wood panel
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	Standards EN ISO 10140-3 EN ISO 717/2	13dB

The above information is subject to modifications for the benefit of further improvement (07/2016).
For more detailed technical information, please contact Tarkett.



5626 018
5625 018
5624 018

ACCZENT EXCELLENCE 70 TOPAZ Clic

Main Product Features

- Warmth and comfort
- Very comfortable flooring with 13dB acoustic
- 2.5mm total thickness
- Available in 2, 3 and 4 meter widths


Surface Treatment



Sustainability Tag



Logistics Information



General Information



ACCZENT EXCELLENCE 70 TOPAZ



Antik Oak - Light Brown

Soft Elm



Brown

5626 001
5625 001
5624 001

Antik Oak




Natural

5626 028
5625 028
5624 028



Light Natural

5626 027
5625 027
5624 027



Light Brown

5626 005
5625 005
5624 005



White

5626 026
5625 026
5624 026

Arcadia



Light Yellow

5626 032
5625 032
5624 032



Brown Natural

5626 030
5625 030
5624 030




Light Grege

5626 031
5625 031
5624 031



Beige Yellow

5626 025
5625 025
5624 025



Light Natural

5626 006
5625 006
5624 006



TECHNICAL DATA	STANDARDS	Accent Excellence 70 Topaz
Classification		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.50mm
Wear layer thickness	ISO 24340 (EN 429)	0.70mm
Total weight	ISO 23997 (EN 430)	2 900g/m²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performances		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	C _{fl} -s1 glued on any derivative wood panel C _{fl} -s1 loose-laid on any derivative wood panel
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	Standards EN ISO 10140-3 EN ISO 717/2	13dB

The above information is subject to modifications for the benefit of further improvement (07/2016).
For more detailed technical information, please contact Tarkett.



Middle Natural

5626 029
5625 029
5624 029

ACCZENT EXCELLENCE 70 TOPAZ Wood

Main Product Features

- Warmth and comfort
- Very comfortable flooring with 13dB acoustic
- 2.5mm total thickness
- Available in 2, 3 and 4 meter widths

Surface Treatment



Sustainability Tag



Logistics Information



Available in rolls:
2m, 3m & 4m
Rolls length: 24lm

Laying direction:



Wood

General Information



According to European
Classification ISO 10874 (EN 685)


ACCZENT EXCELLENCE 70 SILVER




Silver - Metal Blue




White Gold



Silver Grey



Gold



Metal Blue

5722 001
5327 001
5710 001

5722 002
5327 002
5710 002

5722 003
5327 003
5710 003

5722 004
5327 004
5710 004



Grey Blue



Beige



Light Grey


5722 005
5327 005
5710 005

5722 006
5327 006
5710 006

5722 007
5327 008
5710 007

TECHNICAL DATA	STANDARDS	Accent Excellence 70 Silver
Classification		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	0.70mm
Total weight	ISO 23997 (EN 430)	2 360g/m²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performances		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	B _s S1 glued over any A2 _s or A1 _s substrate (concrete) and over any derivative wood substrate
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	Standards EN ISO 10140-3 EN ISO 717/2	10dB

The above information is subject to modifications for the benefit of further improvement (07/2016).
For more detailed technical information, please contact Tarkett.

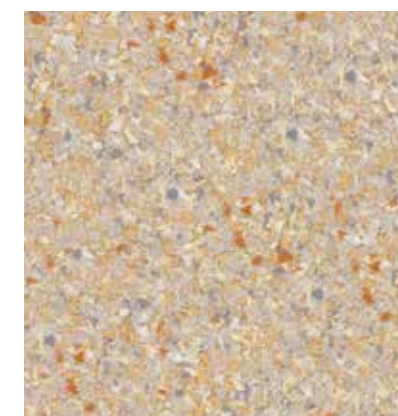

Beige Red

5722 008
5327 007
5710 008

ACCZENT EXCELLENCE 70 SILVER

Main Product Features

- Comfort and a safety touch
- Comfortable floor with 10dB acoustic
- Superior anti slip resistance (R10)
- Available in 2, 3 and 4 meter widths
- Inlaid designs

Surface Treatment



Sustainability Tag



Logistics Information



General Information



According to European
Classification ISO 10874 (EN 685)

ACCZENT EXCELLENCE 70 RUBY



Nature - 3755 063

Nature




3755 046
3780 046



3755 065
3780 065




3755 042
3780 042



3755 043
3780 043




3755 044
3780 044



3755 045
3780 045



3755 049
3780 049




3755 050
3780 050



3755 051
3780 051



3755 052
3780 052



3755 063
3780 063



3755 053
3780 053



3755 064
3780 064



3755 059
3780 059



3755 060
3780 060



3755 056
3780 056



3755 057
3780 057



3755 058
3780 058



3755 054
3780 054




3755 055
3780 055




TECHNICAL DATA	STANDARDS	Acczent Excellence 70 Ruby
Classification		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	0.70mm
Total weight	ISO 23997 (EN 430)	3 000g/m²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performances		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	B _{fl} S1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) and over any derivative wood substrate
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6


The above information is subject to modifications for the benefit of further improvement (07/2016).
For more detailed technical information, please contact Tarkett.



3755 109
3780 109



3755 048
3780 048

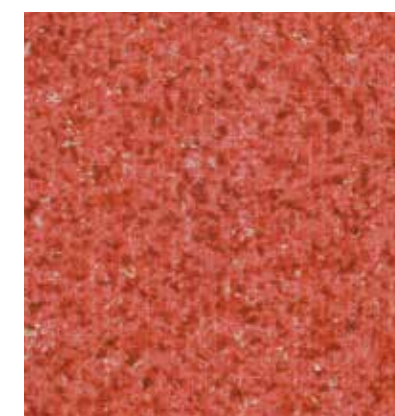

3755 061
3780 061

ACCZENT EXCELLENCE 70 RUBY Nature

Main Product Features

- Resistance and a safety touch
- Excellent resistance to indentation and abrasion
- Superior anti slip resistance (R10)
- Available in 2 and 4 meter widths

Surface Treatment



Sustainability Tag



Logistics Information



General Information



ACCZENT EXCELLENCE 70 RUBY



Faro 2 - Natural

Beech Fayard



Light Natural

3755 029
3780 029

Beech



Natural

3755 030
3780 030

Trend Oak



White Beige

3755 031
3780 031

Faro 2



Natural Brown

3755 032
3780 032



Natural

3755 034
3780 034


Oak



Grey Beige

3755 035
3780 035

Antik Oak



Grey

3755 036
3780 036

Domigo



Natural Grey

3755 037
3780 037

3755 038
3780 038

Walnut



Flat Brown

3755 039
3780 039

Maple



Dark

3755 040
3780 040



Red

3755 041
3780 041



TECHNICAL DATA	STANDARDS	Accent Excellence 70 Ruby
Classification		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	0.70mm
Total weight	ISO 23997 (EN 430)	3 000g/m²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performances		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	B _{fl} S1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) and over any derivative wood substrate
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (07/2016).
For more detailed technical information, please contact Tarkett.

Sherwood



Natural Brown

3755 033
3780 033

ACCZENT EXCELLENCE 70 RUBY Wood

Main Product Features

- Resistance and a safety touch
- Excellent resistance to indentation and abrasion
- Superior anti slip resistance (R10)
- Available in 2 and 4 meter widths

Surface Treatment



Sustainability Tag



Logistics Information



Available in rolls:
2m & 4m
Rolls length: 231m

Laying direction:



Wood

General Information



According to European
Classification ISO 10874 (EN 685)

ACCZENT EXCELLENCE 70 OPAL



Clic - 3810 027

Clic




3810 035
3811 035



3810 033
3811 033




3810 030
3811 030




3810 027
3811 027



3810 036
3811 036




3810 037
3811 037




3810 029
3811 029




3810 028
3811 028



3810 025
3811 025



3810 032
3811 032



3810 031
3811 031



3810 034
3811 034

Wood




3810 024
3811 024



3810 021
3811 021



3810 022
3811 022



3810 020
3811 020

Natural

Natural beige

Natural

Natural dark



TECHNICAL DATA	STANDARDS	Accent Excellence 70 Opal
Classification		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	0.70mm
Total weight	ISO 23997 (EN 430)	3 000g/m²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performances		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	B _{fl} S1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) and over any derivative wood substrate
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (07/2016).
For more detailed technical information, please contact Tarkett.



3810 026
3811 026

ACCZENT EXCELLENCE 70 OPAL Clic / Wood

Main Product Features

- Colours combinations between all-over designs and uni shades
- Available in 2 and 4 meter widths

Surface Treatment



Sustainability Tag




Logistics Information



Available in rolls:
2m & 4m
Rolls length: 23lm

Laying direction:



General Information

