

TECHNICAL DATA	STANDARDS	Aquarelle Wall HFS
Classification		
Type of wall covering	EN 15102	Heterogeneous compact wallcovering
Classification	EN 259	Heavy duty
Characteristics		
Total thickness	ISO 24346 (EN 428)	0.92 mm
Wear layer thickness	ISO 24340 (EN 429)	0.12 mm
Total weight	ISO 23997 (EN 430)	1 500 g/m ²
Technical performances		
Dimensional stability	ISO 23999 (EN 434)	Lengthwise: ≤ 0.80% Widthwise: ≤ 0.40%
Reaction to fire	EN 13501-1	B-s2 d0 on gypsum plasterboard and on A1 or A2 substrate
Seam strength	EN 684	≥ 150 N/50 mm
Acoustical absorption	NF EN ISO 354	0.05 (H)
Chemical resistance	ISO 26987 (EN 423)	Good resistance
Hygiene	—	Does not contribute to infection spreading


The above information is subject to modifications for the benefit of further improvement.
For more detailed technical information, please contact Tarkett.

AQUARELLE WALL HFS

Main Product Features


- Waterproof installation, ideal for wet commercial applications
- Unique wetroom concept: walls, floors, borders and accessories available in warm and vivid tones to coordinate with Optima Multisafe / Granit Multisafe / Granit Safe.T
- Fire resistant: B-s2 d0
- Hygienic and easy to maintain

Sustainability Tag




(1) For all products produced in 2015

Logistics Information



General Information

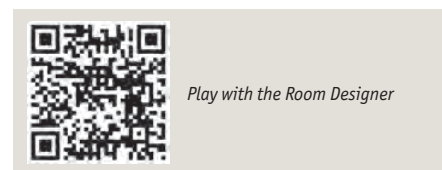

Play with the Room Designer