


TAPIFLEX STAIRS & ACCESSIBILITY SOLUTIONS

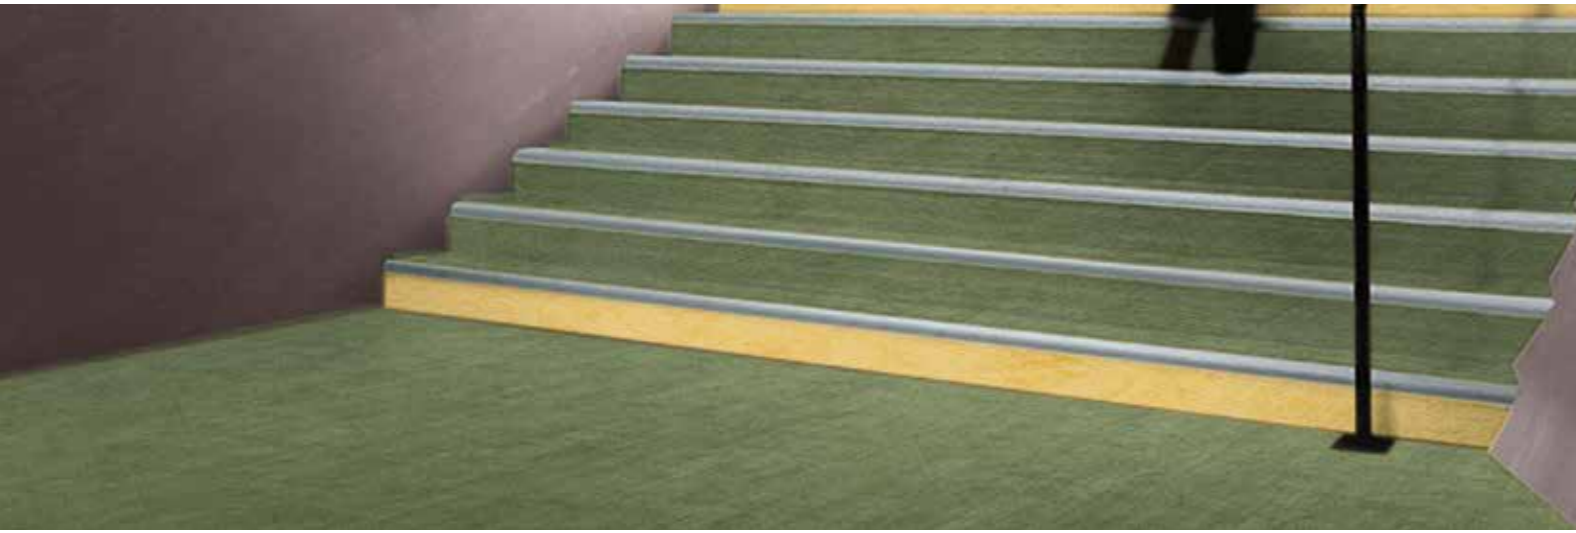

TAPIFLEX STAIRS & ACCESSIBILITY SOLUTIONS

Vinyl stair solutions to offer safety and noise reduction in all buildings

SENSORIAL BENEFITS

- Wide range of stair designs ready to lay, with wood, kraft and concrete contrastful effects
- Matching designs in Tapiflex Evolution, Excellence and Essential ranges
- Wide range of dedicated accessories

FUNCTIONAL BENEFITS


- Built-in stair noses to create contrast and offer safety to users
- Highly resistant and easy to maintain thanks to TopClean XP surface treatment
- Combined accessibility kit for visually impaired people, in accordance with regulatory requirements (warning tile and tactile strip)

ENVIRONMENTAL BENEFITS

- Unrivalled indoor air quality
- Improved carbon footprint

TAPIFLEX STAIRS & TAPIFLEX STAIRS SELF-ADHESIVE

- 1 TopClean XP – reinforced treatment: very high resistance to scratches and easy maintenance
- 2 Pure transparent vinyl wear layer: resistance to abrasion
- 3 Contrasted decors: visual guidance and safety
- 4 Glass fibre non-woven reinforcement: superior dimensional stability
- 5 Solid homogeneous calendered sheet made of recycled vinyl: resistance to indentation and tearing
- 6 High density closed-cell foam backing: sound reduction and comfort underfoot
- 7 Tapiflex Stairs SA: auto-adhesive backing

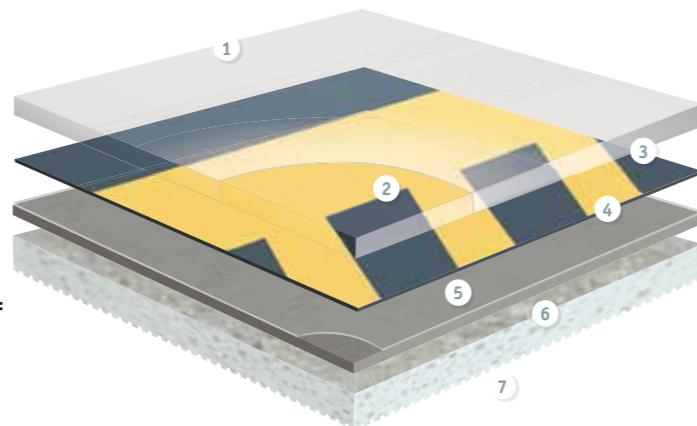

TECHNICAL DATA	STANDARDS	Tapiflex Stairs	Tapiflex Stairs Self-adhesive
Classification			
Type of Floor Covering	ISO11638	Heterogeneous Acoustic Vinyl	Heterogeneous Acoustic Vinyl
Classification	ISO 10582 commercial industrial	Classes: 34 43	Classes: 34 43
Polyurethane reinforcement (PUR)	–	TopClean XP	TopClean XP
Characteristics			
Total thickness	ISO 24346	3.50mm	3.50mm
Wear layer thickness	ISO 24340	1.00mm	1.00mm
Total weight	ISO 23997	3 670g/m ²	3 670g/m ²
Technical performances			
Impact Sound Reduction	EN ISO 10 140-3 EN ISO 717/2	18dB	18dB
Residual indentation	Average measured value	0.17mm	0.17mm
	ISO 24343-1 requirement	≤ 0.20mm	≤ 0.20mm
	Best measured value(*)	0.10mm	0.10mm
Reaction to fire	EN 13501-1	B _n s1 glued over any A2 _s or A1 _s substrate (concrete) C _n s1 glued over any derivative wood substrate	C _n s1 glued over any Concrete or any derivative wood substrates
Slip resistance	DIN 51130 EN 13893	R10 ≥ 0.3	R10 ≥ 0.3
Dimensional stability	ISO 23999	≤ 0.10%	≤ 0.10%
Curl resultant to heat	ISO 23999	≤ 8mm	≤ 8mm
Chemical resistance	ISO 26987	High resistance	High resistance
Hygiene	–	Does not contribute to infection spreading	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable	0.04m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6	≥ 6
Abrasion group	EN 660-2	Group T: ≤ 2mm ³	Group T: ≤ 2mm ³
Electrostatic properties	EN 1815 EN 1081	≤ 2 kV on concrete R1> 10 ⁹ ohms	≤ 2 kV on concrete R1> 10 ⁹ ohms
Form of delivery			
Form of delivery	ISO 24341	Rolls: 231m x 1.02m	Rolls: 231m x 1.02m
Colours			
Colours	–	Tapiflex Stairs: 18 Tapiflex Stairs Self-adhesive: 6	Tapiflex Stairs: 18 Tapiflex Stairs Self-adhesive: 6

(*) for information – not binding

TECHNICAL DATA	STANDARDS	Warning Tiles				Tactile Strips		
		Rectangular tile	Self-adhesive Rectangular Tile	Self-adhesive Square tile	3D Studs	Tactile Strip	Linear Strip	Vibration Strip
Classification		Compliant						
Classification	NF P 98 351							
Characteristics								
Thickness		Base: 2mm (with bevelled edge) Stud: 5mm (with wear indicator)	Base: 3mm (with bevelled edge) Stud: 5mm (with wear indicator)	5mm (with wear indicator)	1.6mm lower part 3.2mm upper part	2mm lower part 3mm upper part	2mm lower part 3mm upper part	
Weight		0.455kg / tile	1.35kg / tile	0.63kg / tile	0.552kg / pack	16.8kg / roll	0.455kg / strip	0.312kg / strip

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

NEW Self-adhesive stairs

Save 30% installation time with self-adhesive Tapiflex Stairs version now available in 6 colours!



Download the product offer

TAPIFLEX STAIRS & STAIRS SELF-ADHESIVE



Uni - Yellow Grey




Long Modern Oak



Kraft




Esquisse

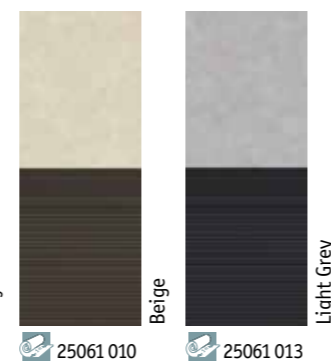


Esquisse



Concrete

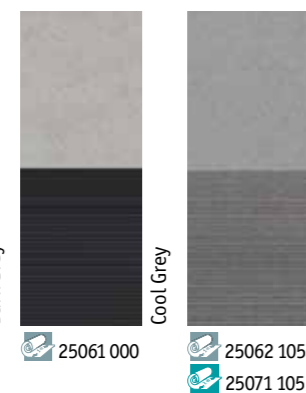


Uni

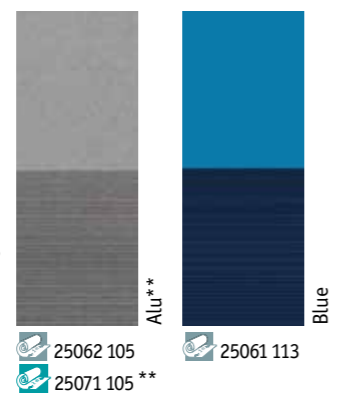

Grey Purple



Medium Grege

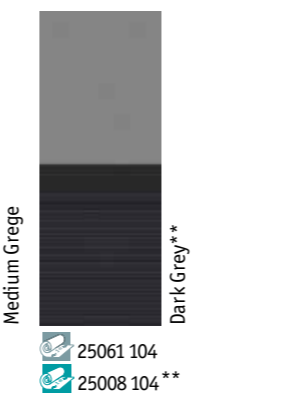


TECHNICAL DATA	STANDARDS	Tapiflex Stairs	Tapiflex Stairs Self-adhesive
Classification			
Type of Floor Covering	ISO11638	Heterogeneous Acoustic Vinyl	Heterogeneous Acoustic Vinyl
Classification	ISO 10582 commercial industrial	Classes: 34 43	Classes: 34 43
Polyurethane reinforcement (PUR)	—	TopClean XP	TopClean XP
Characteristics			
Total thickness	ISO 24346	3.50mm	3.50mm
Wear layer thickness	ISO 24340	1.00mm	1.00mm
Total weight	ISO 23997	3 670g/m ²	3 670g/m ²
Technical performances			
Impact Sound Reduction	EN ISO 10 140-3 EN ISO 717/2	$\Delta L_w = 18dB$	$\Delta L_w = 18dB$
Residual indentation	Average measured value	0.17mm	0.17mm
	ISO 24343-1 requirement	$\leq 0.20mm$	$\leq 0.20mm$
	Best measured value(*)	0.10mm	0.10mm
Reaction to fire	EN 13501-1	B _n s1 glued over any A2 _n or A1 _n substrate (concrete) C _n s1 glued over any derivative wood substrate	C _n s1 glued over any Concrete or any derivative wood substrates
Slip resistance	DIN 51130 EN 13893	R10 ≥ 0.3	R10 ≥ 0.3
Dimensional stability	ISO 23999	$\leq 0.10\%$	$\leq 0.10\%$
Curl resultant to heat	ISO 23999	$\leq 8mm$	$\leq 8mm$
Chemical resistance	ISO 26987	High resistance	High resistance
Hygiene	—	Does not contribute to infection spreading	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable	0.04m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6	≥ 6
Wear-layer binder content	ISO 10582	Type I	Type I
Electrostatic properties	EN 1815 EN 1081	≤ 2 kV on concrete R1 > 10 ⁹ ohms	≤ 2 kV on concrete R1 > 10 ⁹ ohms

(*) for information – not binding

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

Security

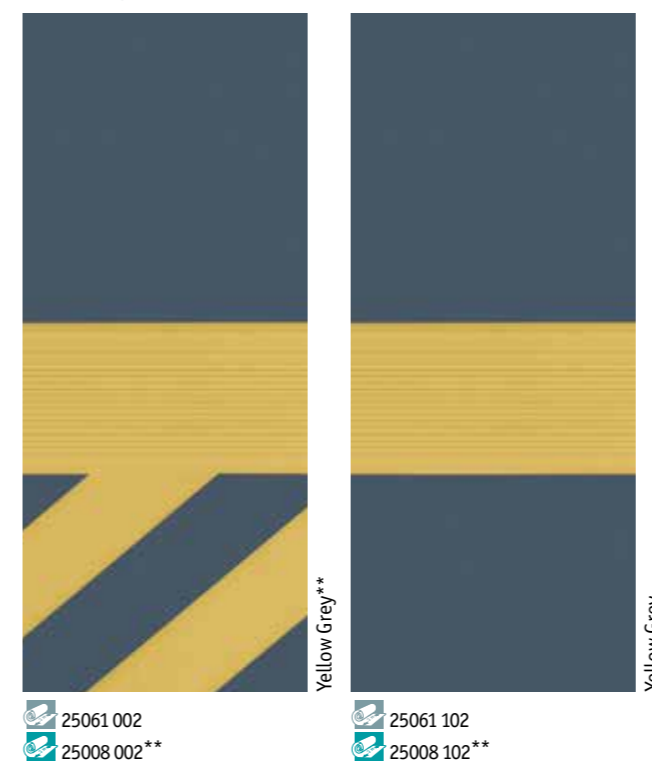

TAPIFLEX STAIRS & STAIRS SELF-ADHESIVE


Main Product Features

- Specially designed ridges to increase slip resistance and safety
- Stair noses with higher contrast for higher visibility
- Elastic foam backing to cushion impact in the event of falling and to reduce noise
- Save 30% installation time with self-adhesive stairs version available in 6 colours (marked with **)
- 1mm thick pure PVC wear layer: excellent resistance to scratches, abrasion, scuffing and soiling
- TopClean XP PUR: easy, low-cost maintenance

Surface Treatment



Sustainability Tag

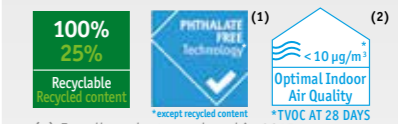

(1) For all products produced in 2015
(2) For Tapiflex Stairs only

Logistics Information

Available in rolls
Rolls length: 23lm

Laying direction:
↑ ↓

General Information

